COMTREND CORPORATION

CT-5361
Wireless ADSL2+ Router
User's Manual

Version A2.1, April 16, 2007

261056-030

Warning

- Before servicing or disassembling this equipment, always disconnect all power and telephone lines from the device.
- Use an appropriate power supply and a UL Listed telephone line cord. Specification of the power supply is clearly stated in Appendix C - Specifications.

Preface

This manual provides information to network administrators. It covers the installation, operation and applications of the ADSL router.

The reader reading this manual is presumed to have a basic understanding of telecommunications. For product update, new product release, manual revision, software upgrade, technical support, etc., visit Comtrend Corporation at http://www.comtrend.com
This document is subject to change without notice.

Recycling For The Environment

Never throw your electronic equipment out with household waste. Ask for information from your town council on how to correctly dispose of it, so that it does not damage the environment. Always respect the current legislation regarding waste disposal.

Persons who do not comply are subject to the sanctions and penalties set down in law.

The cardboard box, the plastic contained in the packaging, and the parts that make up the device can be recycled in accordance with regionally established regulations.

The symbol of the container with the cross, which is found on the device means that when the equipment has reached the end of its working life, it must be taken to the recycling centres provided, and that its processing must be separate from that of domestic waste.

Copyright

Copyright© 2007 Comtrend Corporation. All rights reserved. The information and messages contained herein are proprietary to Comtrend Corporation. No part of this document may be translated, transcribed, reproduced, in any form, or by any means without prior written permission by Comtrend Corporation.

Technical support

When you find the product out of service, or that it doesn't work properly, please contact technical support engineer for immediate servicing or email to INT-support@comtrend.com

Table of Contents

CHAPTER 1 INTRODUCTION 6

1.1 FEATURES 6

1.2 APPLICATION 7

1.3 FRONT PANEL LED INDICATORS 8

CHAPTER 2 INSTALLATION 9

2.1 HARDWARE INSTALLATION 9

CHAPTER 3 LOGIN VIA THE WEB BROWSER 11

3.1 IP ADDRESS 11

3.2 LOGIN PROCEDURE 12

3.3 DEFAULT SETTINGS 13

CHAPTER 4 QUICK SETUP 14

4.1 WAN 15

4.2 STATISTICS 16

4.2.1 LAN Statistics 17

4.2.2 WAN Statistics 18

4.2.3 ATM statistics 19

4.2.4 ADSL Statistics 21

4.2.5 Route 23

4.2.6 ARP 23

4.2.7 DHCP 24

CHAPTER 5 QUICK SETUP 25

5.1 AUTO QUICK SETUP 26

5.2 MANUAL QUICK SETUP 27

5.2.1 PPP over ATM (PPPoA) and PPP over Ethernet (PPPoE) 29

5.2.2 MAC Encapsulation Routing (MER) 34

5.2.3 IP Over ATM 38

5.2.4 Bridging 42

CHAPTER 6 ADVANCED SETUP 44

6.1 WAN 45

6.2 LAN 46

6.3 NAT 47

6.3.1 Virtual Servers 47

6.3.2 Port Triggering *49*
6.3.3 DMZ Host *51*
6.3.4 ALG *52*
6.4 SECURITY 53
6.4.1 IP Filtering *53*
6.4.2 Parental Control *56*
6.5 QUALITY OF SERVICE 57
6.6 ROUTING 59
6.6.1 Default Gateway *59*
6.6.2 Static Route *60*
6.6.3 RIP *61*
6.7 DNS 62
6.7.1 DNS Server *62*
6.7.2 Dynamic DNS *63*
6.8 DSL 65
6.9 PORT MAPPING 66

CHAPTER 7 WIRELESS 68

7.1 WIRELESS BASIC SCREEN 68
7.1.1 Security *70*
7.1.2 MAC Filter *73*
7.1.3 Wireless Bridge *75*
7.1.4 Advanced *76*
7.1.5 Station Info *79*

CHAPTER 8 DIAGNOSTICS 80

CHAPTER 9 MANAGEMENT 82

9.1 SETTINGS 82
9.1.1 Configuration Backup *83*
9.1.2 Tools – Update Settings *84*
9.1.3 Restore Default *85*
9.2 SYSTEM LOG 87
9.3 SNMP AGENT 90
9.4 INTERNET TIME 91
9.5 ACCESS CONTROL 92
9.5.1 Services *93*
9.5.2 Access IP Addresses *94*
9.5.3 Passwords *95*
9.6 UPDATE SOFTWARE 96

9.7 SAVE AND REBOOT 97

APPENDIX A: FIREWALL 98

APPENDIX B: PIN ASSIGNMENTS 104

APPENDIX C: SPECIFICATIONS 105

APPENDIX D: SSH CLIENT 107

Chapter 1 Introduction

The CT-5361 is an 802.11g (54Mbps) wireless and wired Local Area Network (WLAN) ADSL router. Four 10/100 Base-T Ethernet ports provide wired LAN connectivity with an integrated 802.11g WiFi WLAN Access Point (AP) for wireless connectivity. The CT-5361 ADSL router provides state of the art security features such as WPA data encryption Firewall, VPN pass through. The CT-5361 is designed for both residential and business applications that require wireless and wired connectivity to an ADSL broadband network. The CT-5361 supports up to 16 contiguous virtual connections allowing for multiple simultaneous Internet connections.

1.1 Features

- UPnP
- Integrated 802.11g AP
- Backward compatible with 802.11b
- RADIUS client
- WPA and 802.1x
- Up to 125Mbps for wireless (Afterburner mode)
- Wireless QoS (WMM)
- IP/MAC address filtering
- Static route/RIP/RIP v2 routing functions
- Dynamic IP assignment
- IP/Bridge QoS
- NAT/PAT
- IGMP Proxy
- DHCP Server/Relay/Client
- DNS Proxy
- Auto PVC configuration
- Per-VC packet level QoS
- Up to 16 VCs
- Embedded SNMP agent
- Web-based management
- Remote configuration and upgrade
- Configuration backup and restoration
- FTP server
- TFTP server
- IGMP Snooping
- 802.1q/802.1p

1.2 Application

The following diagram depicts the application of the CT-5361 on a wireless network.

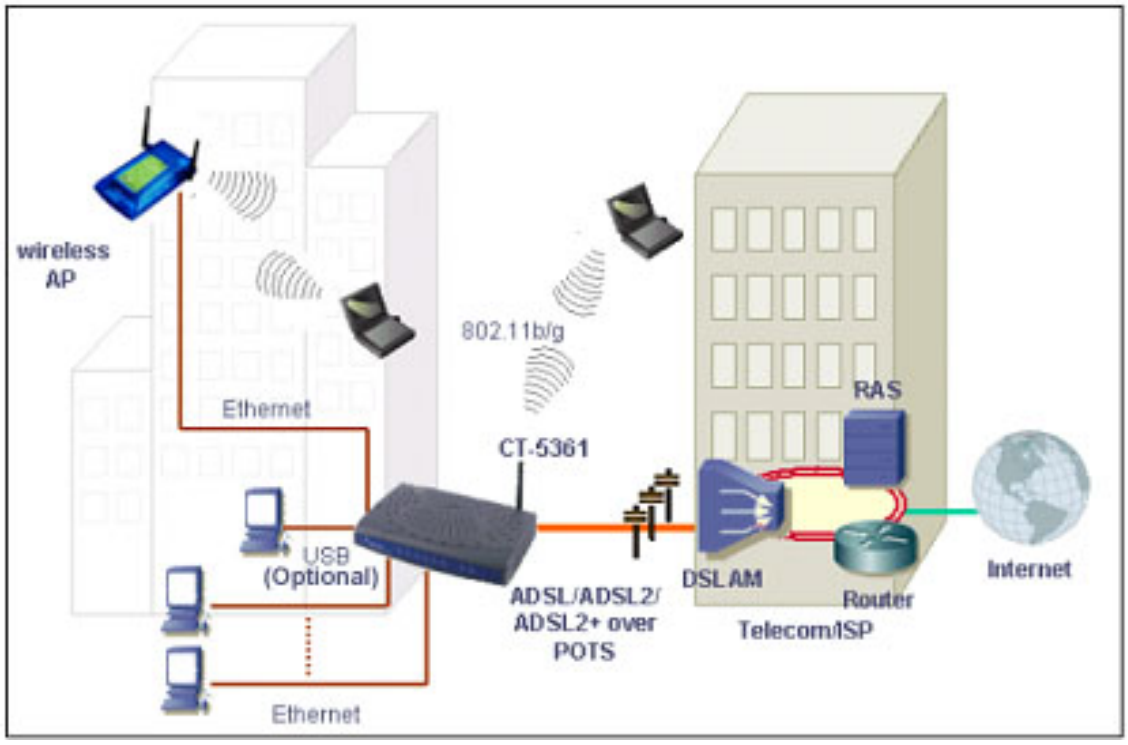

1.3 Front Panel LED Indicators

The front panel LEDs are shown in the picture below, followed by an explanation in the table below.

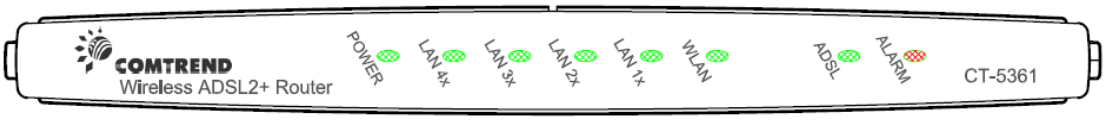

LED	Color	Mode	Function
POWER	Green	On	The router is powered up.
		Off	The router is powered down.
LAN 4X~1X	Green	On	An Ethernet Link is established.
		Off	An Ethernet Link is not established.
	Green	Blink	Data transmitting or receiving over LAN.
WLAN	Green	On	The wireless module is ready and idle.
		Off	The wireless module is not installed.
	Green	Blink	Data transmitting or receiving over WLAN.
ADSL	Green	On	The ADSL link is established.
		Off	The ADSL link is not established.
	Green	Blink	The ADSL link is training or some traffic is passing through ADSL.
ALARM	Red	On	The ADSL link is terminated.
		Off	Normal operating status.

Chapter 2 Installation

2.1 Hardware Installation

In the rear panel, there is a reset button. To load the factory default settings, hold the reset button down for at least 5 seconds.

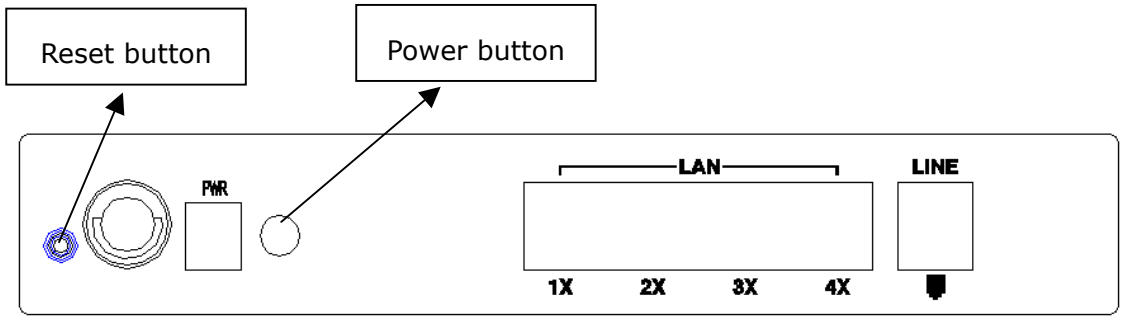

Follow the instructions below to complete the hardware connections.

Connection to LINE port

If you wish to connect both the router and a telephone, connect the LINE port to a POTS splitter with a RJ11 connection cable.

Connection to LAN port

To connect to a hub or PC, use a RJ45 cable. You can connect the router to up to four LAN devices. The ports are auto-sensing MDI/X and either straight-through cable or crossover cable can be used.

Connection to (PWR) Power

Connect the **Power** jack to the shipped power cord. Attach the power adapter to the wall outlet or other AC source.

After all connections have been made, turn the power-switch to the on position.

After power on, the router performs a self-test. Wait for a few seconds until the test is finished, then the router will be ready to operate.

Caution 1: If the router fails to power up, or it malfunctions, first verify that the power supply is connected correctly. Then power it on again. If the problem persists, contact our technical support engineers.

Caution 2: Before servicing or disassembling this equipment always disconnect all power cords and telephone lines from the wall outlet.

Chapter 3 Login via the Web Browser

This section describes how to manage the router via a Web browser via the remote end. You can use a web browser such as Microsoft Internet Explorer, or Netscape Navigator. (The Web page is best viewed with Microsoft Internet Explorer 5.0 and later): A unique default user account is assigned with user name **root** and password **12345**. The user can change the default password later when logged in to the device.

3.1 IP Address

The default IP address of the CT-5361 (LAN port) is 192.168.1.1. To configure the CT-5361 for the first time, the configuration PC must have a static IP address within the 192.168.1.x subnet. Follow the steps below to configure your PC IP address to use subnet 192.168.1.x.

STEP 1: Right click on the Local Area Connection under the Network and Dial-Up connection window and select Properties.

STEP 2: Enter the TCP/IP screen and change the IP address to the domain of 192.168.1.x/24.

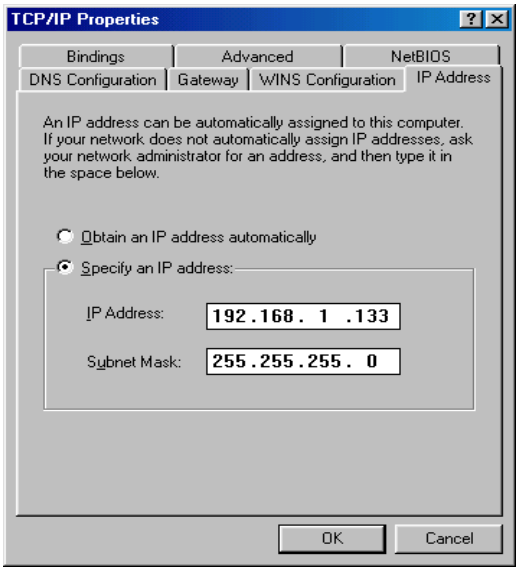

STEP 3: Click **OK** to submit the settings.

STEP 4: Start your Internet browser and type the IP address for the router (192.168.1.1) in the Web address bar.

3.2 Login Procedure

Perform the following steps to bring up the Web user interface and configure the CT-5361. To log on to the system from the Web browser, follow the steps below:

STEP 1: Start your Internet browser. Type the IP address for the router in the Web address field. For example, if the IP address is 192.168.1.1, type **http://192.168.1.1**

STEP 2: You will be prompted to enter your user name and password. Type **root** in the user name and **12345** in the password field, and click **OK**. These values can be changed later in the Web User Interface by selecting the **Management** link.

STEP 3: After successfully logging in, you will reach the Quick Setup menu.

3.3 Default Settings

During power on initialization, the CT-5361 initializes all configuration attributes to default values. It will then read the configuration profile from the Permanent Storage section on the flash memory. The default attributes are overridden when identical attributes with different values are configured. The configuration profile in Permanent Storage can be created via the Web user interface or telnet user interface, or other management protocols. The factory default configuration can be restored either by pushing the reset button for more than five seconds, or by clicking the Restore Default Configuration option in the Restore Settings screen.

The following default settings are present when setting up the router for the first time. The PC running the browser can be attached to the Ethernet.

- LAN port IP address: 192.168.1.1
- Local administrator account name: root
- Local administrator account password: 12345
- Local non- administrator account name: user
- Local non- administrator account password: user
- Remote WAN access: disabled
- Remote WAN access account name: support
- Remote WAN access account password: support
- NAT and firewall: disabled
- DHCP server on LAN interface: enable
- WAN IP address: none

Chapter 4 Quick Setup

After login, the **Quick Setup** screen appears as shown.

Note: The selections available on the left side of menu are based upon the configured connection.

Shown here is the **Device Info** screen for your reference.

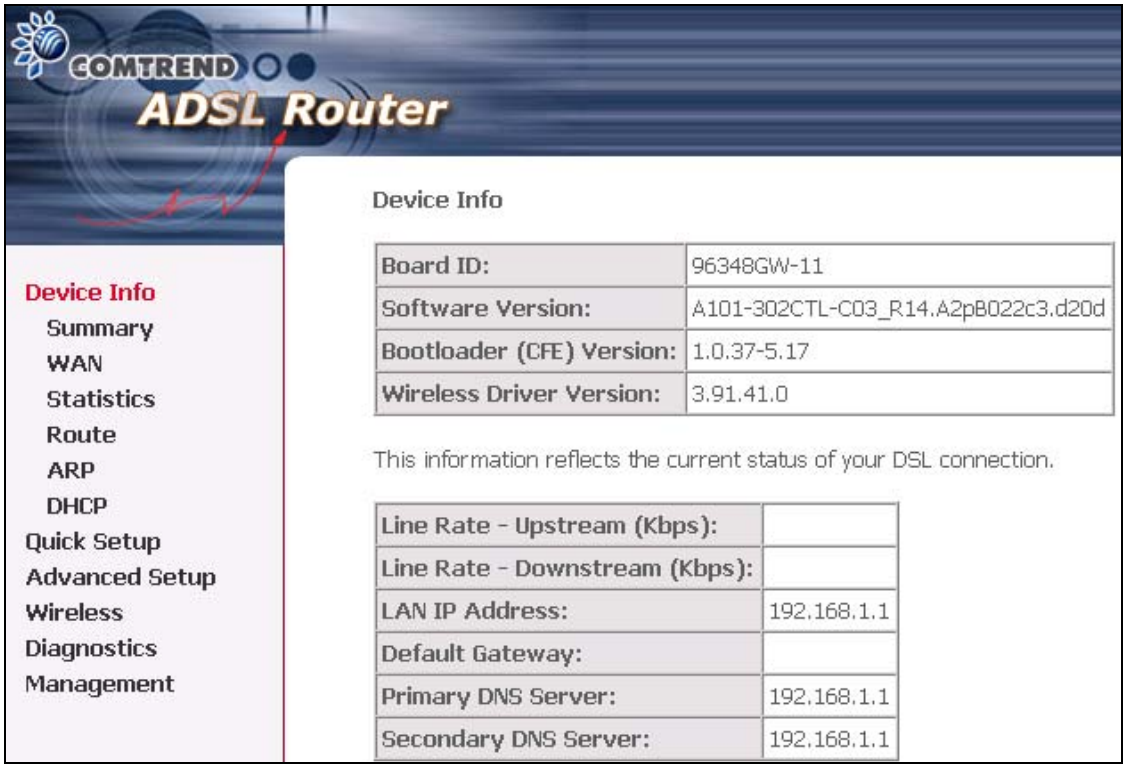

4.1 WAN

Click **Device Info** on the menu bar to display the WAN option. Then, click **WAN** on the Device Info menu bar to display the configured PVC(s) and the status.

VPI/VCI	Shows the values of the ATM VPI/VCI
Con. ID	Shows the connection ID
Category	Shows the ATM service classes
Service	Shows the name for WAN connection
Interface	Shows connection interfaces
Protocol	Shows the connection type, such as PPPoE, PPPoA, etc.
IGMP	Shows the state of the IGMP function
State	Shows the connection state of the WAN connection
Status	Lists the status of DSL link
IP Address	Shows IP address for WAN interface

4.2 Statistics

Selection of the Statistics screen provides statistics for the Network Interface of LAN, WAN, ATM and ADSL. All statistics screens are updated every 15 seconds.

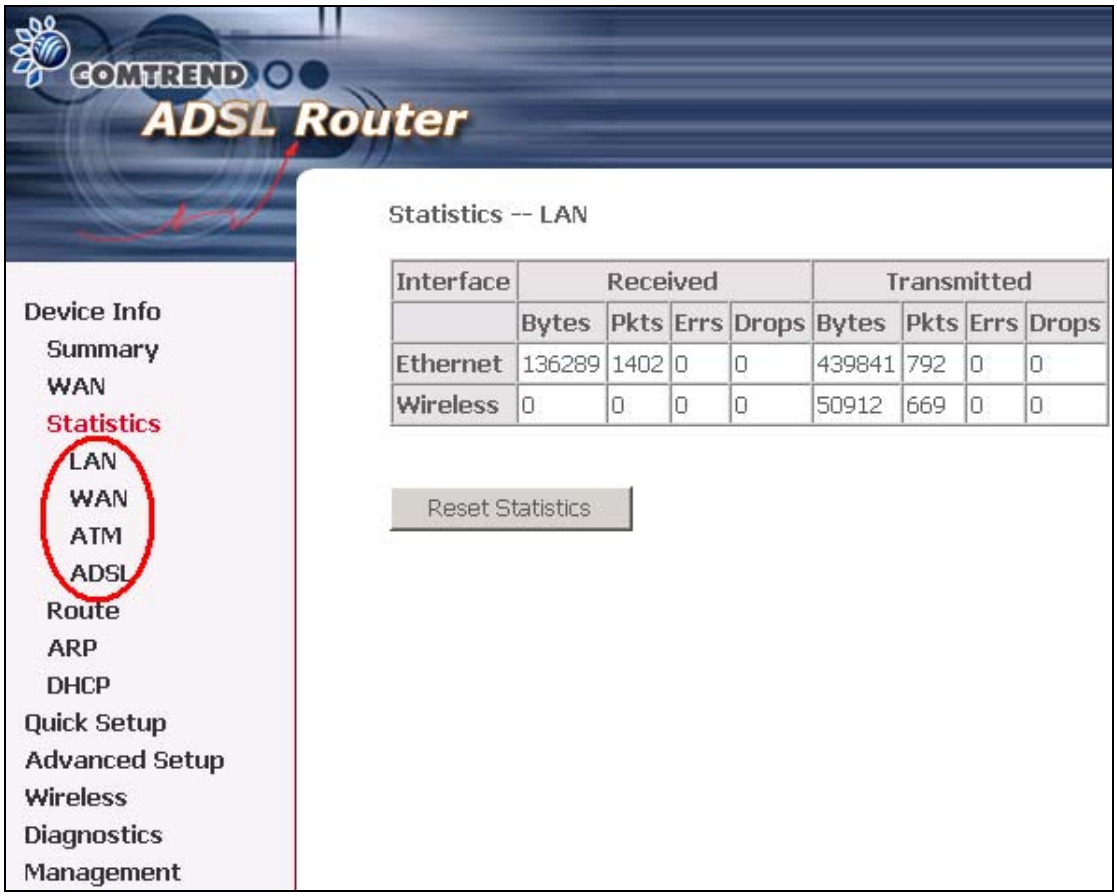

4.2.1 LAN Statistics

The Network Statistics screen shows interface statistics for ATM AAL5 interface, Ethernet and USB interfaces. (The Network Statistics screen shows the interface statistics for the LAN interface. Here provides byte transfer, packet transfer, Error and Drop statistics for the LAN interface.)

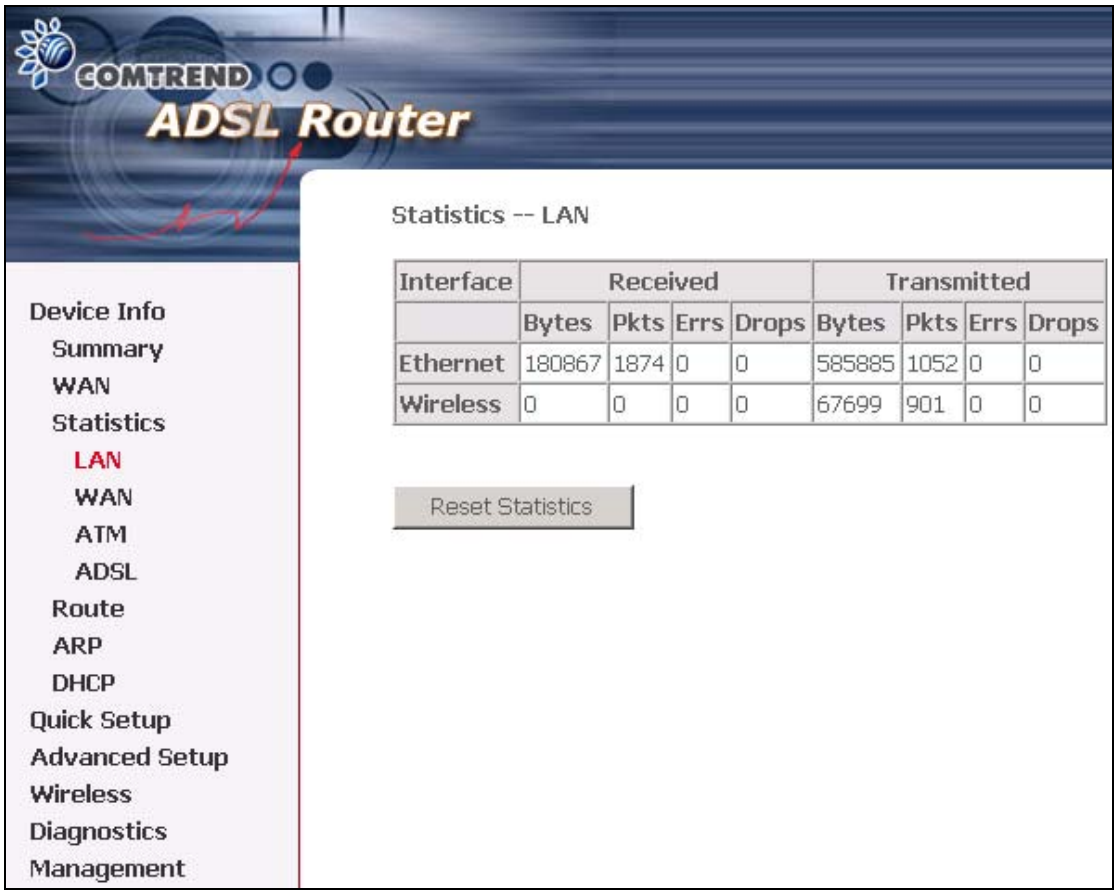

4.2.2 WAN Statistics

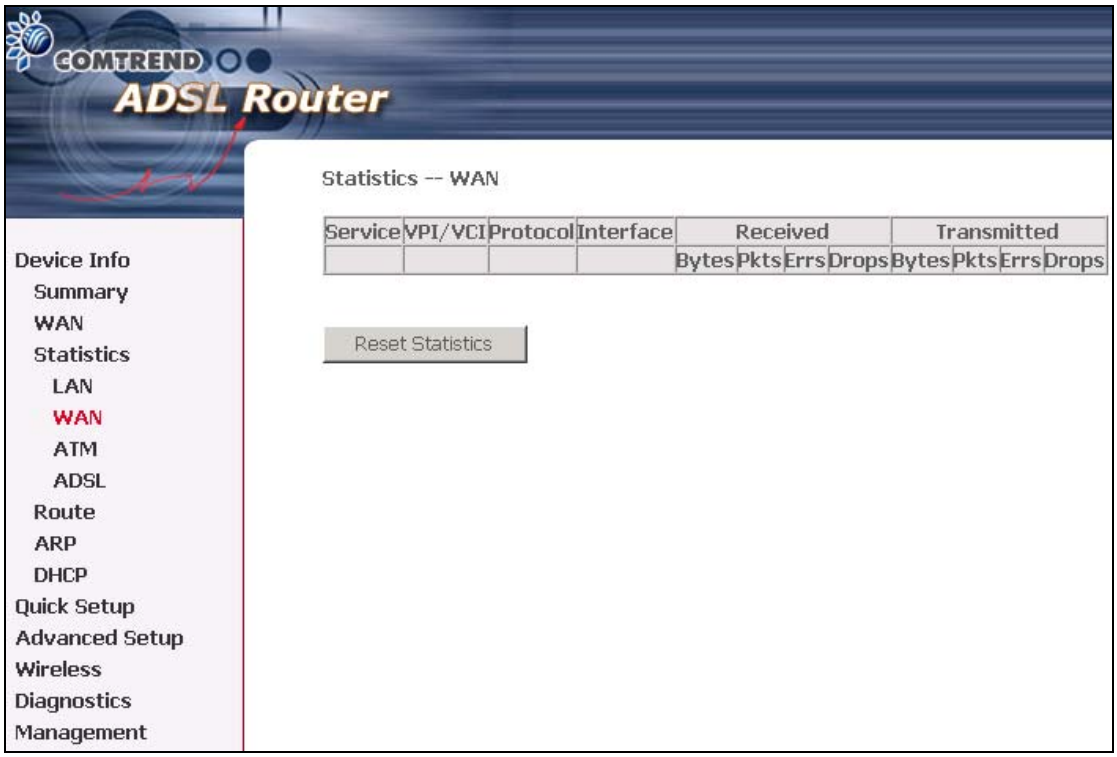

Service	Shows the service type
VPI/VCI	Shows the values of the ATM VPI/VCI
Protocol	Shows the connection type, such as PPPoE, PPPoA, etc.
Interface	Shows connection interfaces
Received/Transmitted - Bytes - Pkts - Errs - Drops	Rx/TX (receive/transmit) packet in Bytes Rx/TX (receive/transmit) packets Rx/TX (receive/transmit) the errored packets Rx/TX (receive/transmit) dropped packets

4.2.3 ATM statistics

The following figure shows the ATM statistics screen.

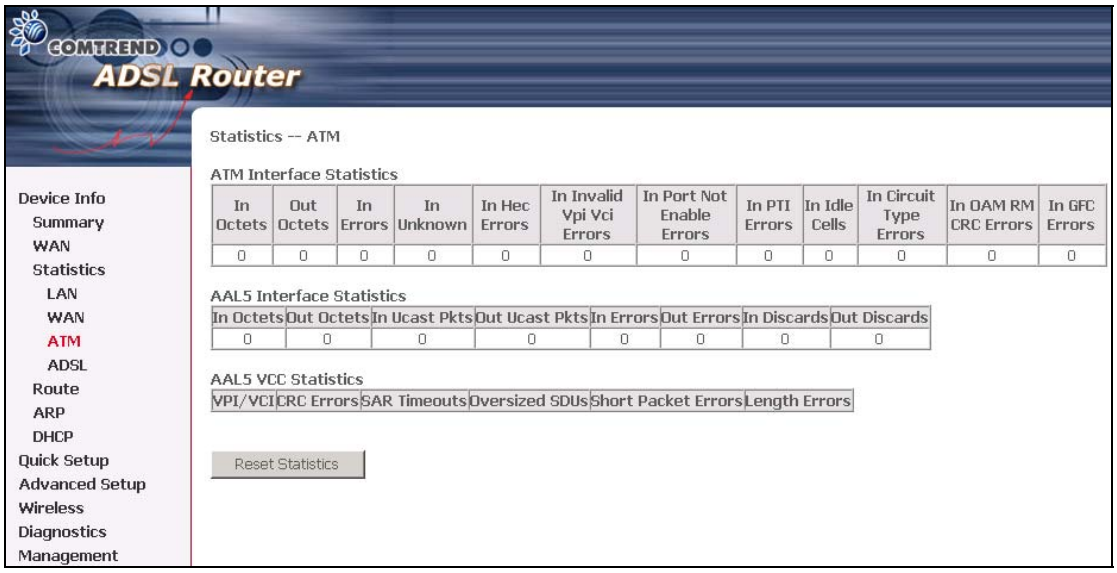

ATM Interface Statistics

Field	Description
In Octets	Number of received octets over the interface
Out Octets	Number of transmitted octets over the interface
In Errors	Number of cells dropped due to uncorrectable HEC errors
In Unknown	Number of received cells discarded during cell header validation, including cells with unrecognized VPI/VCI values, and cells with invalid cell header patterns. If cells with undefined PTI values are discarded, they are also counted here.
In Hec Errors	Number of cells received with an ATM Cell Header HEC error
In Invalid Vpi Vci Errors	Number of cells received with an unregistered VCC address.
In Port Not Enabled Errors	Number of cells received on a port that has not been enabled.
In PTI Errors	Number of cells received with an ATM header Payload Type Indicator (PTI) error
In Idle Cells	Number of idle cells received
In Circuit Type Errors	Number of cells received with an illegal circuit type
In Oam RM CRC Errors	Number of OAM and RM cells received with CRC errors
In GFC Errors	Number of cells received with a non-zero GFC.

ATM AAL5 Layer Statistics over ADSL interface

Field	Description
In Octets	Number of received AAL5/AAL0 CPCS PDU octets
Out Octets	Number of received AAL5/AAL0 CPCS PDUs octets transmitted
In Ucst Pkts	Number of received AAL5/AAL0 CPCS PDUs passed to a higher-layer for transmission
Out Ucast Pkts	Number of received AAL5/AAL0 CPCS PDUs received from a higher layer for transmission
In Errors	Number of received AAL5/AAL0 CPCS PDUs received in error. The types of errors counted include CRC-32 errors.
Out Errors	Number of received AAL5/AAL0 CPCS PDUs that could not be transmitted due to errors.
In Discards	Number of received AAL5/AAL0 CPCS PDUs discarded due to an input buffer overflow condition.
Out Discards	This field is not currently used

ATM AAL5 LAYER STATISTICS FOR EACH VCC OVER ADSL INTERFACE

Field	Description
CRC Errors	Number of PDUs received with CRC-32 errors
SAR TimeOuts	Number of partially re-assembled PDUs which were discarded because they were not fully re-assembled within the required period of time. If the re-assembly time is not supported then, this object contains a zero value.
Over Sized SDUs	Number of PDUs discarded because the corresponding SDU was too large
Short Packets Errors	Number of PDUs discarded because the PDU length was less than the size of the AAL5 trailer
Length Errors	Number of PDUs discarded because the PDU length did not match the length in the AAL5 trailer

4.2.4 ADSL Statistics

The following figure shows the ADSL Network Statistics screen. Within the ADSL Statistics window, a bit Error Rate Test can be started using the ADSL BER Test button. The Reset button resets the statistics.

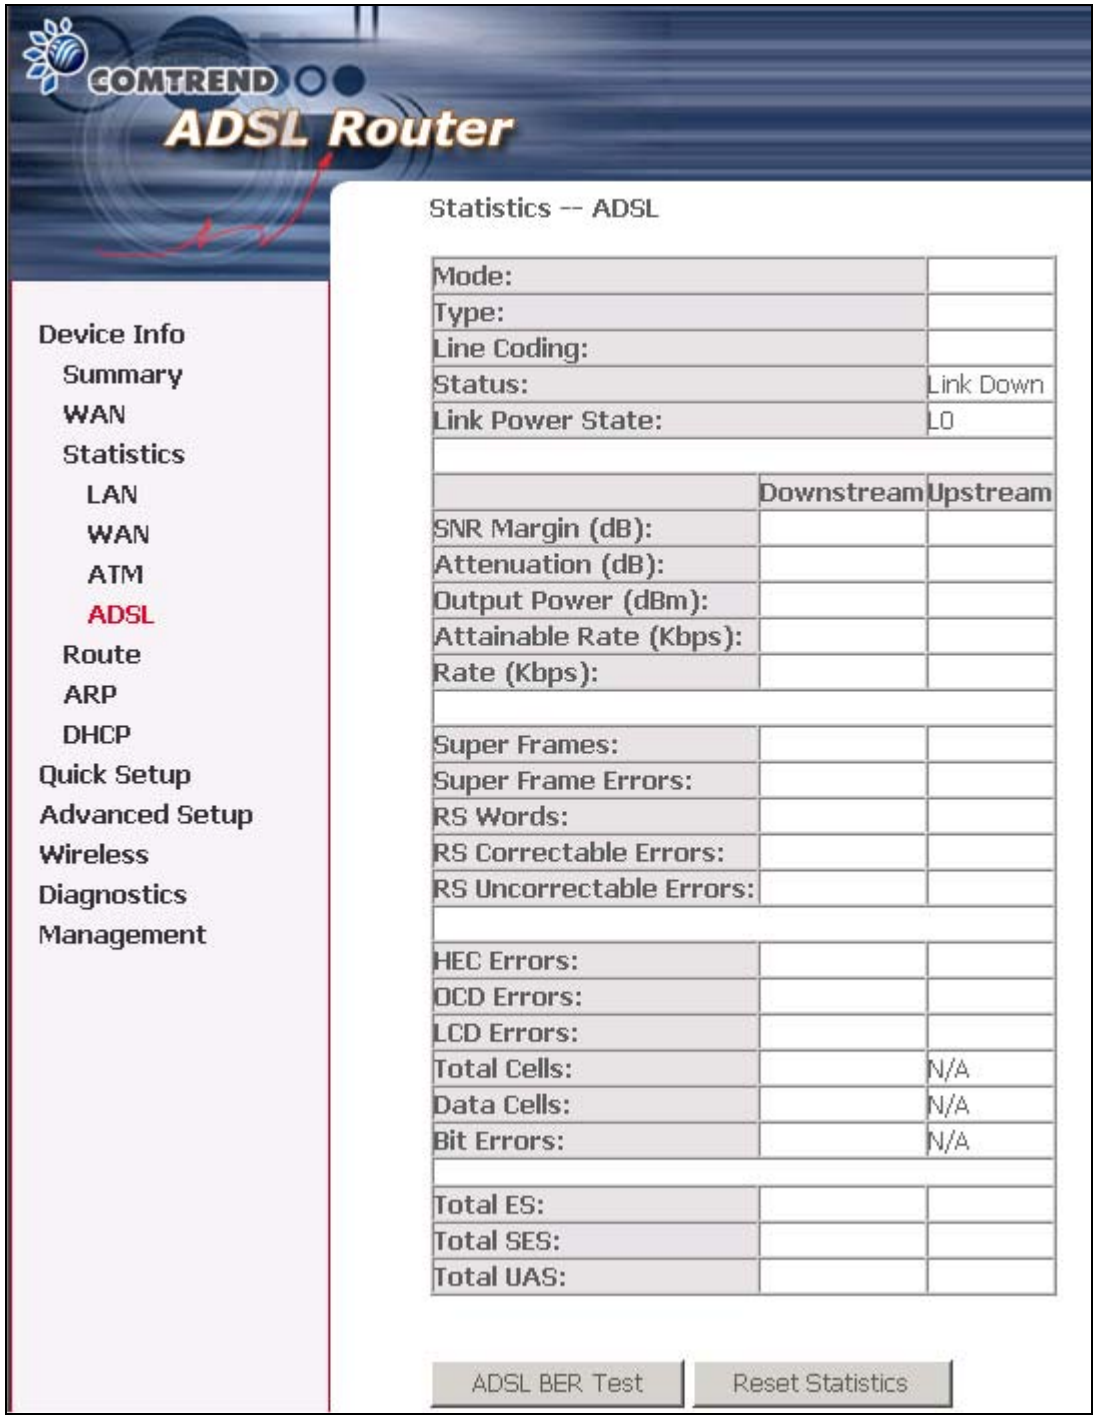

Field	Description
Mode	Line Coding format, that can be selected G.dmt, G.lite, T1.413, ADSL2
Type	Channel type Interleave or Fast
Line Coding	Trellis On/Off
Status	Lists the status of the DSL link
Link Power State	Link output power state.
SNR Margin (dB)	Signal to Noise Ratio (SNR) margin
Attenuation (dB)	Estimate of average loop attenuation in the downstream direction.
Output Power (dBm)	Total upstream output power
Attainable Rate (Kbps)	The sync rate you would obtain.
Rate (Kbps)	Current sync rate.
Super Frames	Total number of super frames
Super Frame Errors	Number of super frames received with errors
RS Words	Total number of Reed-Solomon code errors
RS Correctable Errors	Total Number of RS with correctable errors
RS Uncorrectable Errors	Total Number of RS words with uncorrectable errors
HEC Errors	Total Number of Header Error Checksum errors
OCD Errors	Total Number of out-of-cell Delineation errors
LCD Errors	Total number of Loss of Cell Delineation
Total ES:	Total Number of Errored Seconds
Total SES:	Total Number of Severely Errored Seconds
Total UAS:	Total Number of Unavailable Seconds

4.2.5 Route

Choose **Route** to display the routes that the route information has learned.

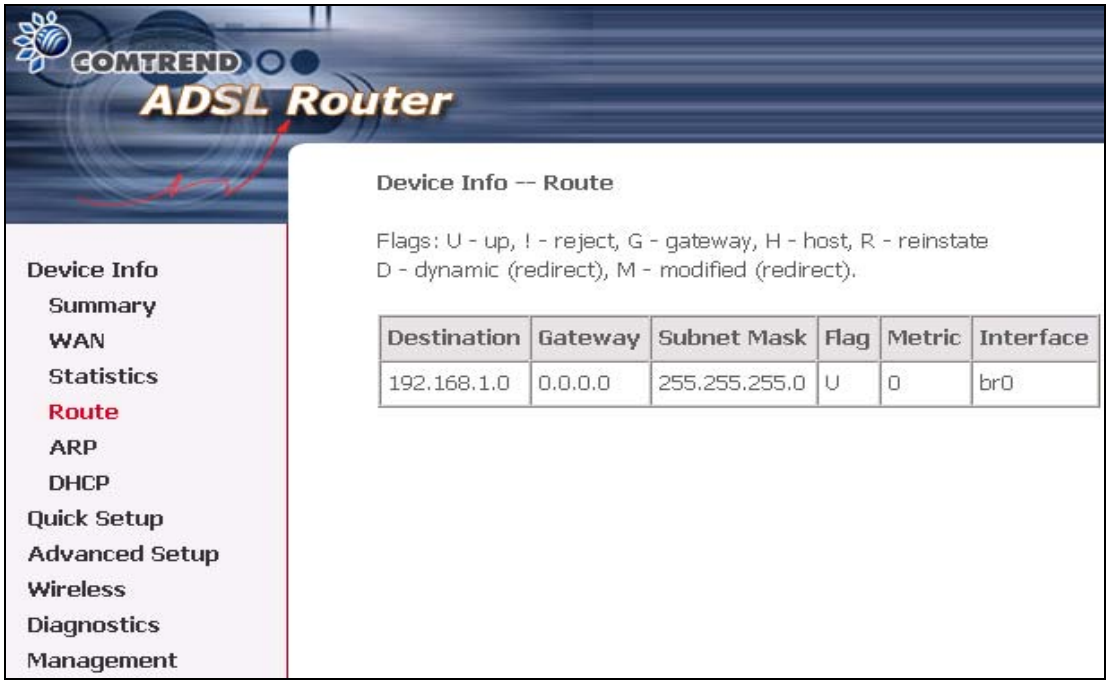

4.2.6 ARP

Click **ARP** to display the ARP information.

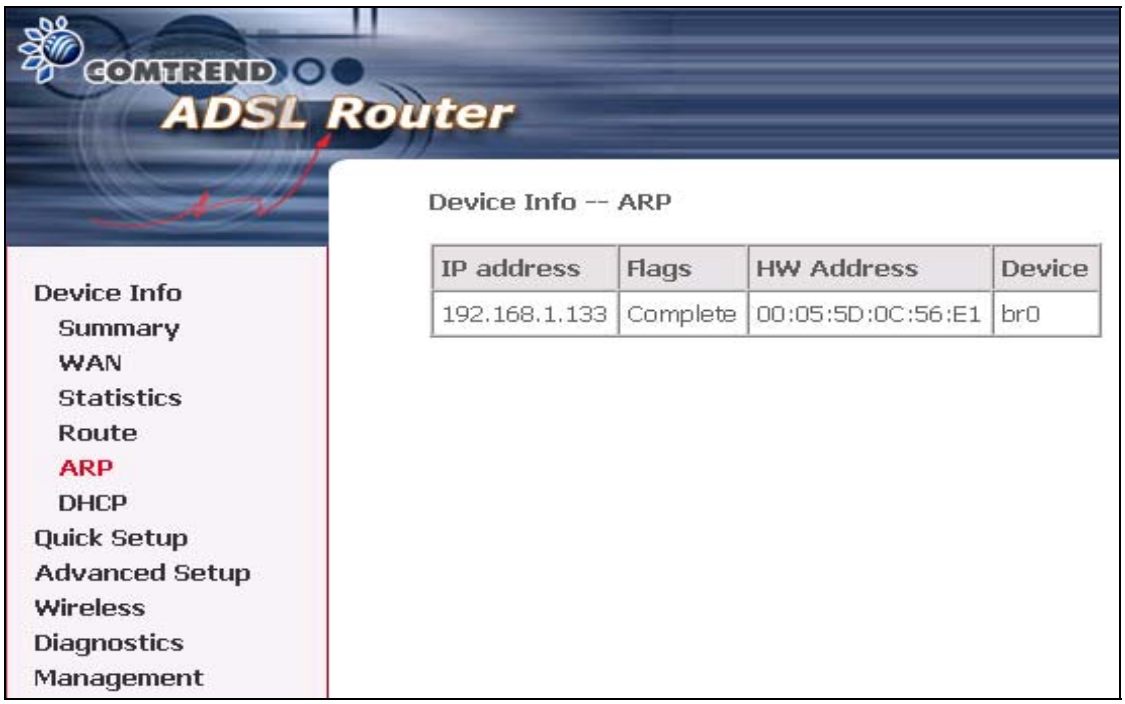

4.2.7 DHCP

Click **DHCP** to display the DHCP information.

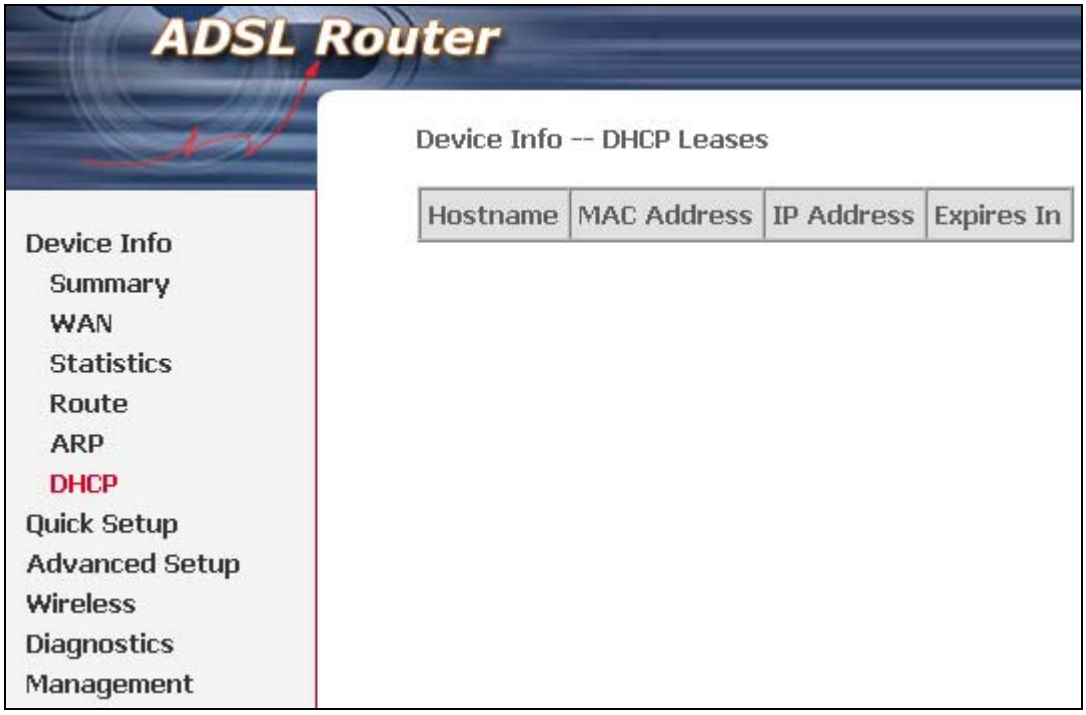

Chapter 5 Quick Setup

The Quick Setup allows the user to configure the ADSL router for DSL connectivity and Internet access. It also guides the user though the WAN network setup first and then the LAN interface setup. You can either manually customize the router or follow the online instruction to set up the router.

The CT-5361 ADSL router supports the following five network operating modes over an ATM PVC WAN interface.

- PPP over Ethernet (PPPoE)
- PPP over ATM (PPPoA)
- MAC Encapsulated Routing (MER)
- IP over ATM (IPoA)
- Bridging

The following configuration considerations apply:

- The WAN network operating mode operation depends on the service provider's configuration on the Central Office side and Broadband Access Server for the PVC
- If the service provider provides PPPoE service, then the connection selection depends on whether the LAN-side device (typically a PC) is running a PPPoE client or whether the CT-5361 is to run the PPPoE client. The CT-5361 can support both cases simultaneously.
- If some or none of the LAN-side devices do not run PPPoE client, then select PPPoE. If every LAN-side device is running a PPPoE client, then select Bridge In PPPoE mode, CT-5361 also supports pass-through PPPoE sessions from the LAN side while simultaneously running a PPPoE client fro non-PPPoE LAN devices. NAT and firewall are always enabled when PPPoE mode is selected, but they can be enabled or disabled by the user when MER or IPoA is selected, NAT and firewall are always disabled when Bridge mode is selected.
- Depending on the network operating mode, and whether NAPT and firewall are enabled or disabled, the main panel will display or hide the NAPT/Firewall menu. For instance, at initial setup, the default network operating mode is Bridge. The main panel will not show the NAPT and Firewall menu.

Note: Up to eight PVC profiles can be configured and saved on the flash memory. To activate a particular PVC profile, you need to navigate all the Quick Setup pages until the last summary page, then click on the Finish button and reboot the system.

5.1 Auto Quick Setup

The auto quick setup requires the ADSL link to be up. The ADSL router will automatically detect the PVC. You only need to follow the online instructions that you are prompted.

1. Select **Quick Setup** to display the DSL Quick Setup screen.

2. Click **Next** to start the setup process. Follow the online instructions to complete the setting. This procedure will skip some processes like PVC index, or encapsulation.

3. After the settings are complete, you can use the ADSL service.

5.2 Manual Quick Setup

STEP 1: Click **Quick Setup** and un-tick the **DSL Auto-connect** checkbox to enable manual configuration of the connection type.

Un-tick this checkbox to enable manual setup and display the following screen.

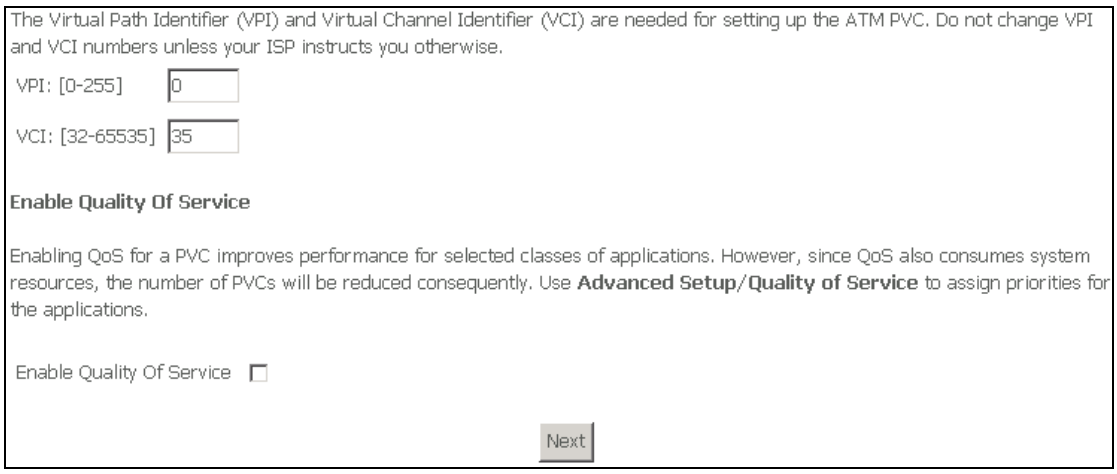
The Virtual Path Identifier (VPI) and Virtual Channel Identifier (VCI) are needed for setting up the ATM PVC. Do not change VPI and VCI numbers unless your ISP instructs you otherwise.
VPI: [0-255] 0
VCI: [32-65535] 35
Enable Quality Of Service
Enabling QoS for a PVC improves performance for selected classes of applications. However, since QoS also consumes system resources, the number of PVCs will be reduced consequently. Use Advanced Setup/Quality of Service to assign priorities for the applications.
Enable Quality Of Service
Next

STEP 2: Enter the Virtual Path Identifier (VPI) and Virtual Channel Identifier (VCI). Select Enable Quality Of Service if required. Click **Next**.

STEP 3: STEP 3: Then, choose the Encapsulation mode. Select **Enable 802.1q** (by ticking the box) if required, and input a number for the VLAN ID. Click Next.

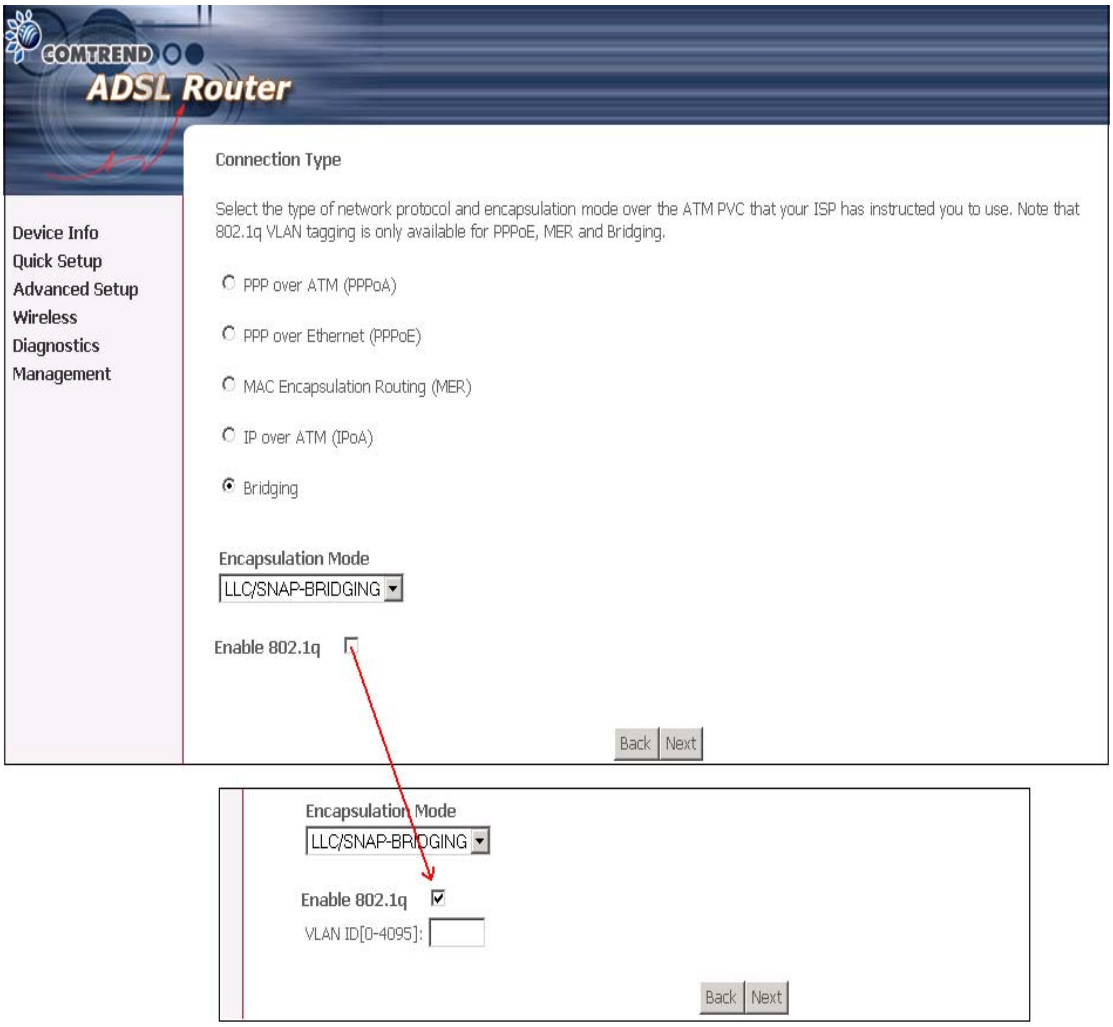

STEP 4: Click **Next** to display the following screen. Choosing different connection types pops up different settings requests. Enter appropriate settings that are requested by your service provider. The following descriptions state each connection type setup separately.

5.2.1 PPP over ATM (PPPoA) and PPP over Ethernet (PPPoE)

1. Select the **PPP over ATM (PPPoA)** or **PPP over Ethernet (PPPoE)** radio button and click **Next**. The following screen appears:

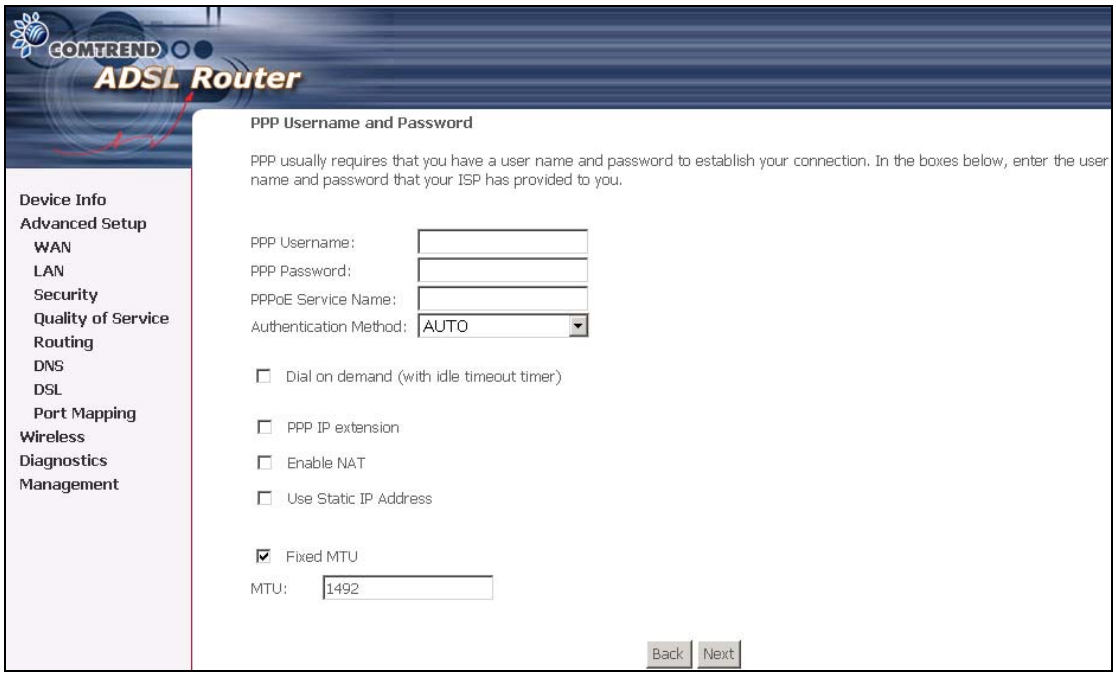

PPP USERNAME/PPP PASSWORD/ PPPOE SERVICE NAME:

The PPP Username, PPP password and the PPPoE Service Name entries are dependent on the particular requirements of the ISP or the ADSL service provider. The WEB user interface allows a maximum of 256 characters in the PPP user name and a maximum of 32 characters in PPP password.

Encapsulation Mode

Choosing different connection types provides different encapsulation modes.

- PPPoA- VC/MUX, LLC/ENCAPSULATION
- PPPoE- LLC/SNAP BRIDGING, VC/MUX
- MER- LLC/SNAP-BRIDGING, VC/MUX
- IPoA- LLC/SNAP-ROUTING, VC MUX
- Bridging- LLC/SNAP-BRIDGING, VC/MUX

Disconnect if no activity

The CT-5361 can be configured to disconnect if there is no activity for a period of time by selecting the **Dial on demand** check box. When the checkbox is ticked, you need to enter the inactivity timeout period. The timeout period ranges from 1 minute to 4320 minutes.

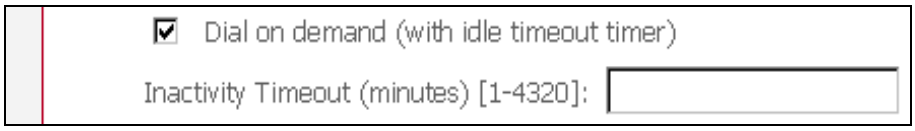

PPP IP Extension

The PPP IP Extension is a special feature deployed by some service providers. Unless your service provider specially requires this setup, do not select it.

The PPP IP Extension supports the following conditions:

- Allows only one PC on the LAN
- The public IP address assigned by the remote side using the PPP/IPCP protocol is actually not used on the WAN PPP interface. Instead, it is forwarded to the PC's LAN interface through DHCP. Only one PC on the LAN can be connected to the remote, since the DHCP server within the ADSL router has a single IP address to assign to a LAN device.
- NAPT and firewall are disabled when this option is selected.
- The ADSL router becomes the default gateway and DNS server to the PC through DHCP using the LAN interface IP address.
- The ADSL router extends the IP subnet at the remote service provider to the LAN PC. That is, the PC becomes a host belonging to the same IP subnet.
- The ADSL router bridges the IP packets between WAN and LAN ports, unless the packet is addressed to the router's LAN IP address.

Enable NAT checkbox

If the LAN is configured with a private IP address, the user should select this checkbox. The NAT submenu on the left side main panel will be displayed after reboot. The user can then configure NAT-related features after the system comes up. If a private IP address is not used on the LAN side (i.e the LAN side is using a public IP), this checkbox should be de-selected. When the system comes back after reboot, the NAT submenu will not be displayed on the left main panel.

Use Static IP Address

Unless your service provider specially requires this setup, do not select it.
If selected, enter your static IP address.

Enable IGMP Multicast checkbox: Tick the checkbox to enable IGMP multicast (proxy). IGMP (Internet Group Membership Protocol) is a protocol used by IP hosts to report their multicast group memberships to any immediately neighboring multicast routers.

MTU

This option allows us to change the MTU size for WAN interface, PPPoE and PPPoA. The default value is 1492 for PPPoE and 1500 for PPPoA.

2. Click **Next** to display the following screen.

Enable IGMP Multicast checkbox: Tick the checkbox to enable IGMP multicast (proxy). IGMP (Internet Group Membership Protocol) is a protocol used by IP hosts to report their multicast group memberships to any immediately neighboring multicast routers.

Enable WAN Service checkbox: Tick this item to enable the ATM service. Untick it to stop the ATM service.

Service Name: This is user-defined.

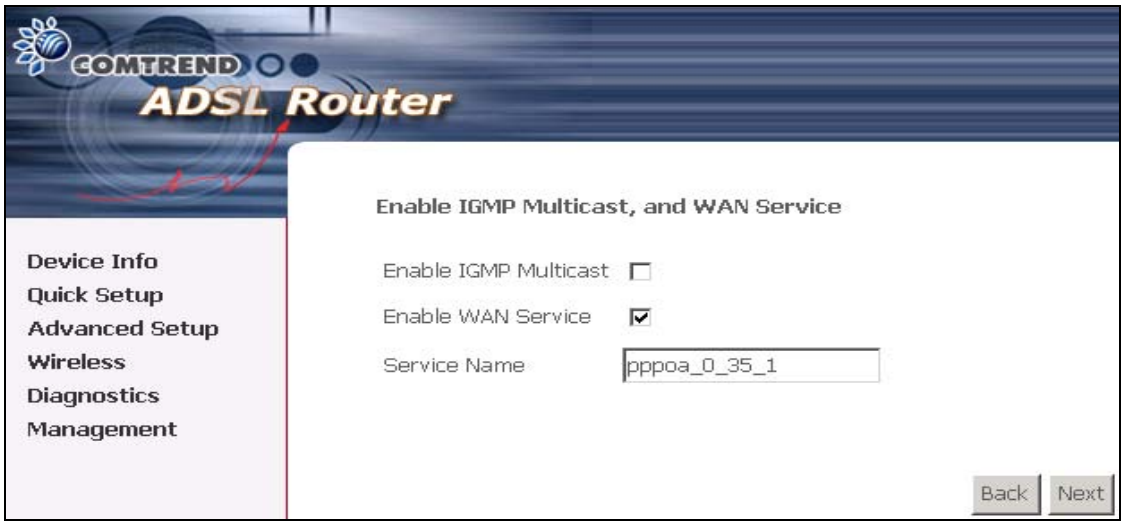

3. After entering your settings, select **Next**. The following screen appears. This page allows the user to configure the LAN interface IP address, subnet mask and DHCP server. If the user would like this ADSL router to assign dynamic IP address, DNS server and default gateways to other LAN devices, select the button **Enable DHCP server on the LAN** to enter the starting IP address and end IP address and DHCP leased time.

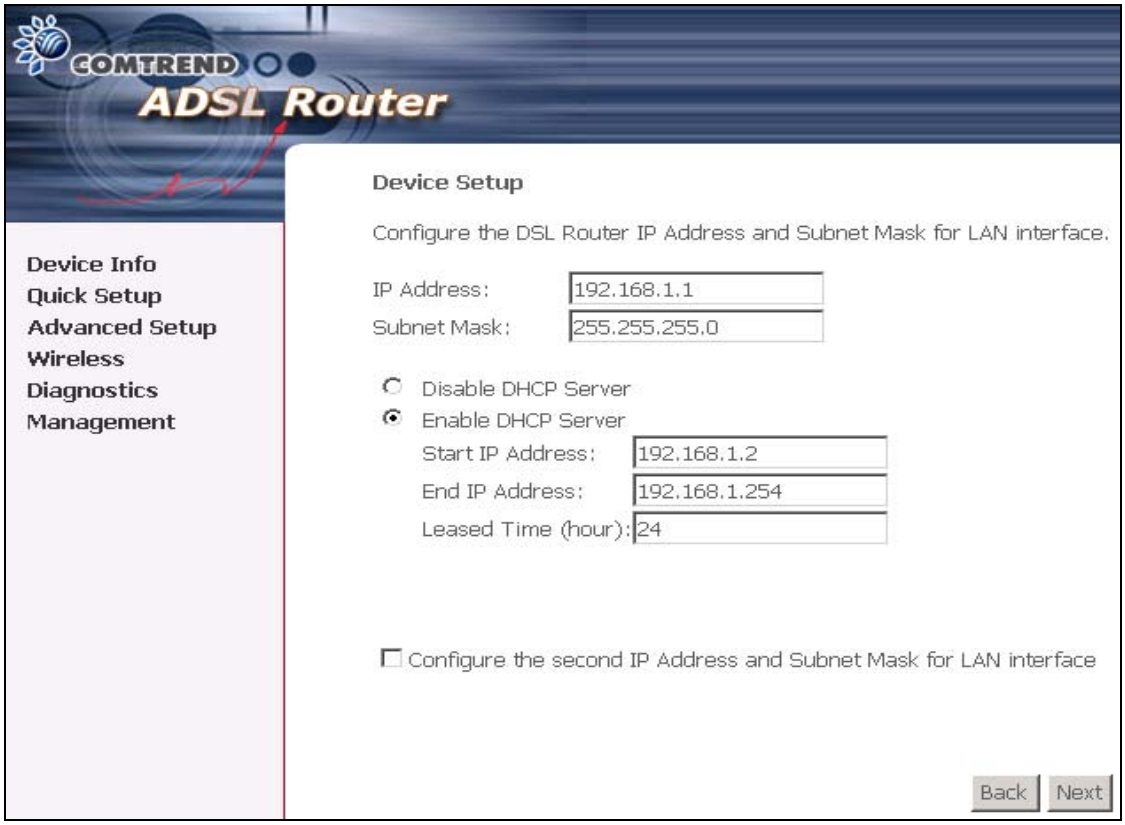

4. The following screen will be displayed. To enable the wireless function, select the box (by clicking on it) and input the SSID. Then, click **Next**.

5. Click **Next** to display the WAN Setup-Summary screen that presents the entire configuration summary. Click **Save/Reboot** if the settings are correct. Click **Back** if you wish to modify the settings.

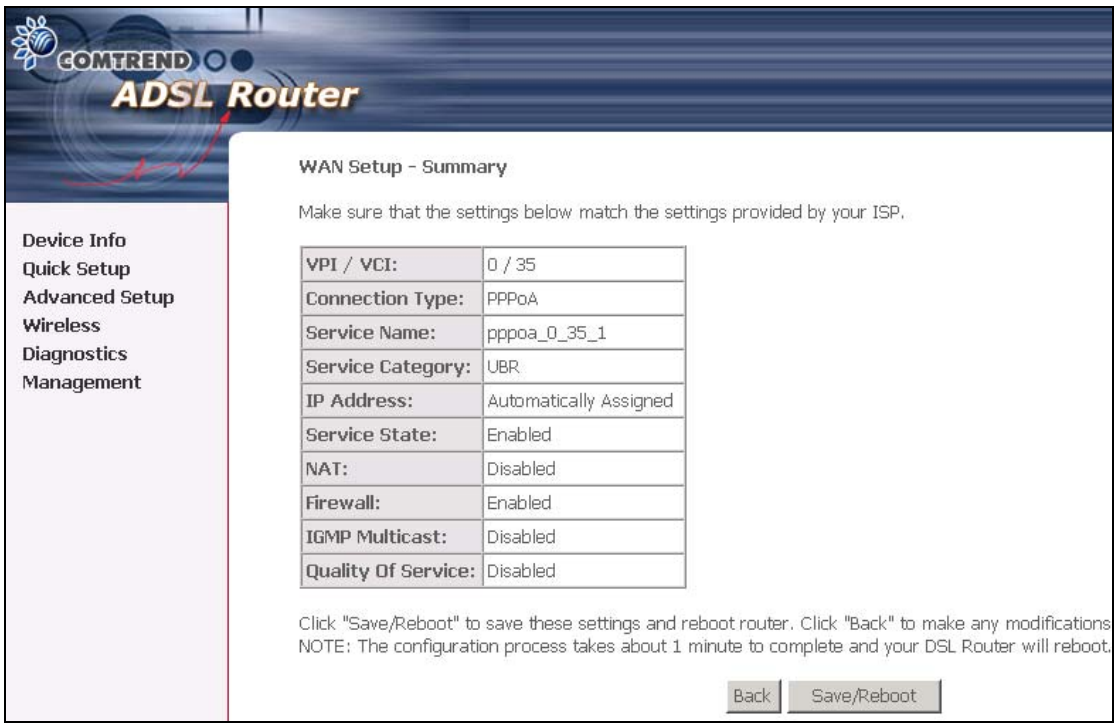
COMTREND
ADSL Router
Device Info
Quick Setup
Advanced Setup
Wireless
Diagnostics
Management
WAN Setup - Summary
Make sure that the settings below match the settings provided by your ISP.
VPI / VCI: 0 / 35
Connection Type: PPPoA
Service Name: pppoa_0_35_1
Service Category: UBR
IP Address: Automatically Assigned
Service State: Enabled
NAT: Disabled
Firewall: Enabled
IGMP Multicast: Disabled
Quality Of Service: Disabled
Click "Save/Reboot" to save these settings and reboot router. Click "Back" to make any modifications
NOTE: The configuration process takes about 1 minute to complete and your DSL Router will reboot.
Back
Save/Reboot

6. After clicking **Save/Reboot**, the router will save the configuration to the flash memory, and reboot. The Web UI will not respond until the system is brought up again. After the system is up, the Web UI will refresh to the Device Info page automatically. The CT-5361 is ready for operation and the LEDs display as described in the LED description tables.

5.2.2 MAC Encapsulation Routing (MER)

To configure MER, do the following.

1. Select **Quick Setup** and click **Next**.
2. Enter the PVC Index provided by the ISP and click **Next**.
3. Select the MAC Encapsulation Routing (MER) radio button, and click **Next**. The following screen appears.

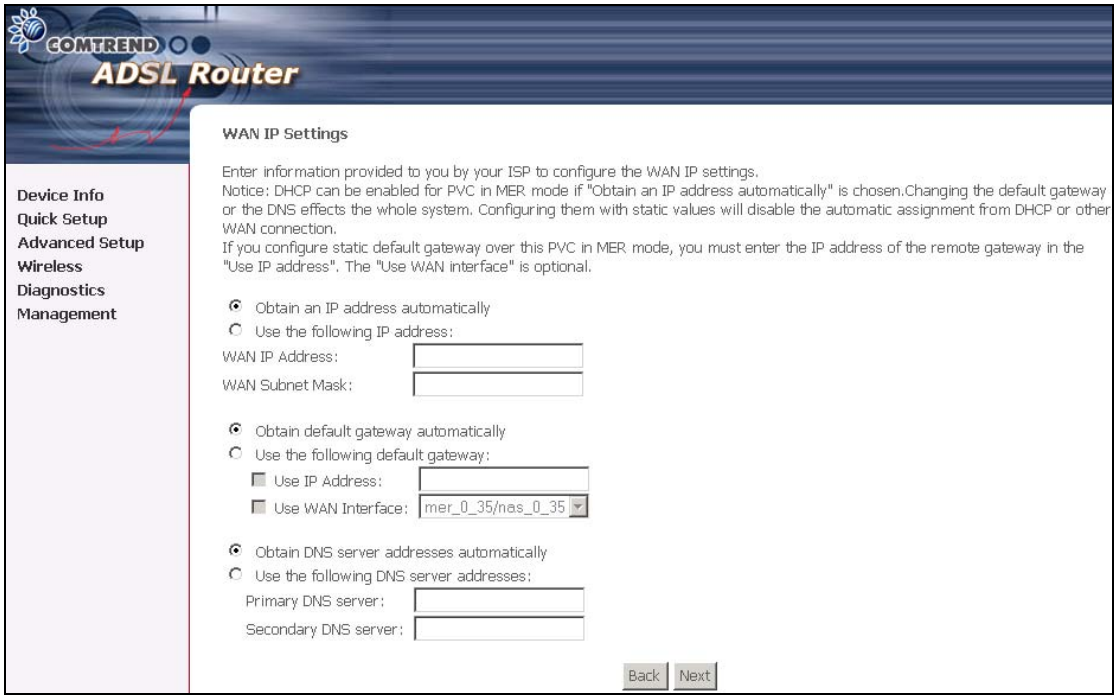
COMTREND
ADSL Router
Device Info
Quick Setup
Advanced Setup
Wireless
Diagnostics
Management
WAN IP Settings
Enter information provided to you by your ISP to configure the WAN IP settings.
Notice: DHCP can be enabled for PVC in MER mode if "Obtain an IP address automatically" is chosen.Changing the default gateway or the DNS effects the whole system. Configuring them with static values will disable the automatic assignment from DHCP or other WAN connection.
If you configure static default gateway over this PVC in MER mode, you must enter the IP address of the remote gateway in the "Use IP address". The "Use WAN interface" is optional.
Obtain an IP address automatically
Use the following IP address:
WAN IP Address:
WAN Subnet Mask:
Obtain default gateway automatically
Use the following default gateway:
Use IP Address:
Use WAN Interface:
mer_0_35/nas_0_35
Obtain DNS server addresses automatically
Use the following DNS server addresses:
Primary DNS server:
Secondary DNS server:
Back
Next

Enter information provided to you by your ISP to configure the WAN IP settings.

Notice: DHCP can be enabled for PVC in MER mode if **Obtain an IP address automatically** is chosen. Changing the default gateway or the DNS effects the whole system. Configuring them with static values will disable the automatic assignment from DHCP or other WAN connection.
If you configure static default gateway over this PVC in MER mode, you must enter the IP address of the remote gateway in the "Use IP address". The "Use WAN interface" is optional.
The ISP should provide the values that must be entered in the entry fields.

4. Click **Next** to display the following screen.

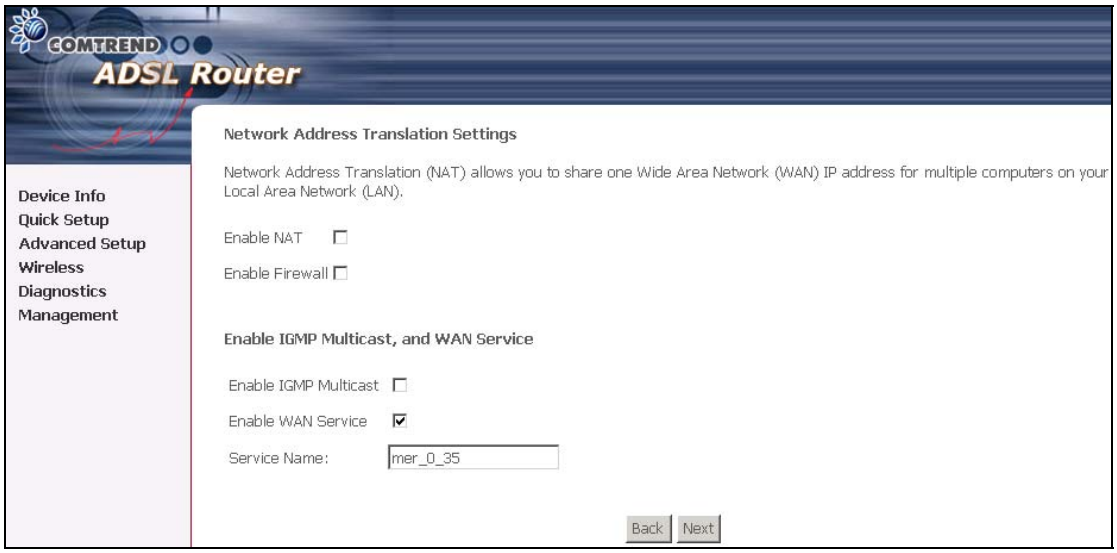

Enable NAT checkbox: If the LAN is configured with a private IP address, the user should select this checkbox. The NAT submenu on the left side main panel will be displayed after reboot. The user can then configure NAT-related features after the system comes up. If a private IP address is not used on the LAN side, this checkbox should be de-selected to free up system resources for better performance. When the system comes back after reboot, the NAT submenu will not be displayed on the left main panel. The default setting for Mer is disabled.

Enable Firewall checkbox: If the firewall checkbox is selected, the Security submenu on the left side main panel will be displayed after system reboot. The user can then configure firewall features after the system comes up. If firewall is not used, this checkbox should be de-selected to free up system resources for better performance. When system comes back after reboot, the Security submenu will not be displayed on the left main panel.

Enable IGMP Multicast: Tick the checkbox to enable IGMP multicast (proxy). IGMP (Internet Group Membership Protocol) is a protocol used by IP hosts to report their multicast group memberships to any immediately neighboring multicast routers.

Enable WAN Service: Tick the checkbox to enable the WAN service. If this item is not selected, you will not be able to use the WAN service.

Service Name: This is User-defined.

5. Upon completion, click **Next**. The following screen appears.

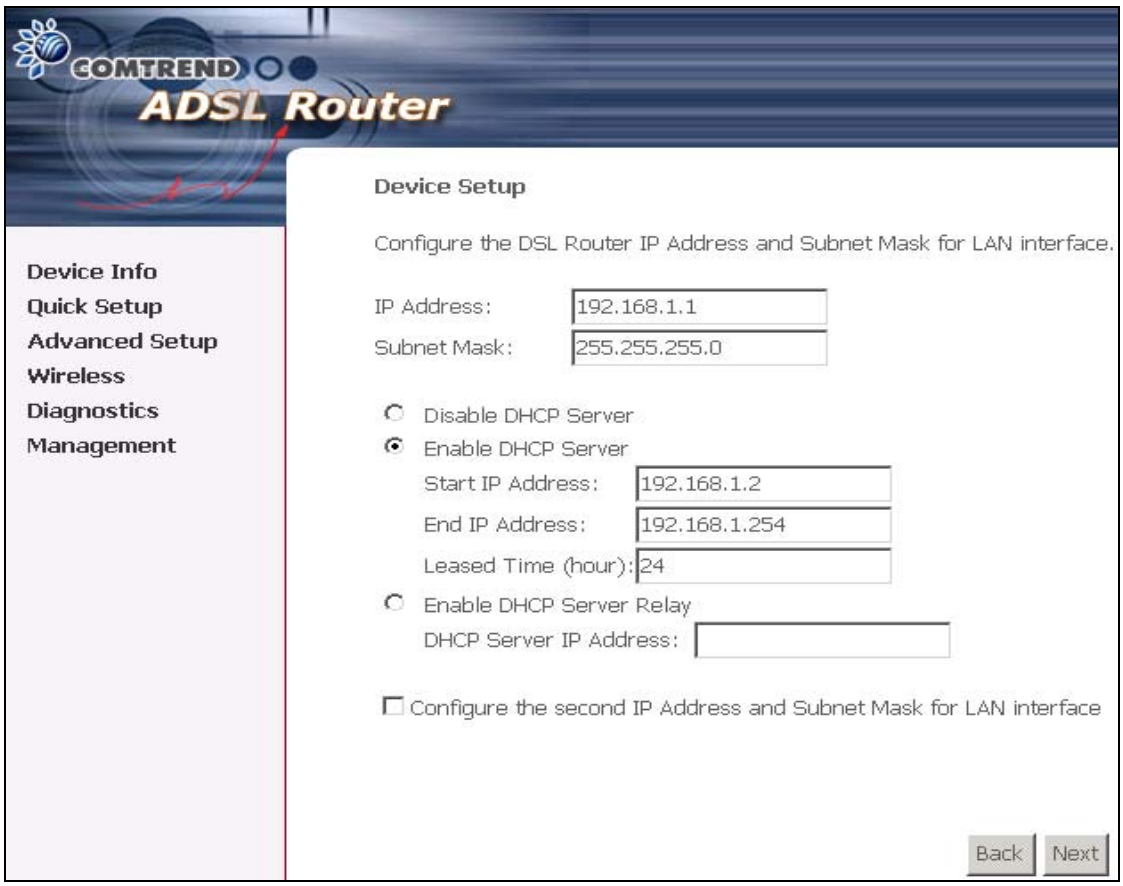

The Device Setup page allows the user to configure the LAN interface IP address and DHCP server. If the user would like this ADSL router to assign dynamic IP addresses, DNS server and default gateway to other LAN devices, select the radio box **Enable DHCP server on the LAN** to enter the starting IP address and end IP address and DHCP lease time. This configures the router to automatically assign IP addresses, default gateway address and DNS server addresses to each of your PCs.

Note that the router's default IP address is 192.168.1.1 and the default private address range provided by the ISP server in the router is 192.168.1.2 through 192.168.1.254.

Select **Enable DHCP Server Relay** (if required), and enter the DHCP Server IP Address.

Note: Ethernet and USB interfaces (and the wireless LAN interface on the CT-5361) share the same subnet since they are bridged within the router.

6. After entering your settings, select **Next** to display the following screen. The WAN Setup-Summary screen presents the entire configuration summary. Click **Save/Reboot** if the settings are correct. Click **Back** if you wish to modify the settings.

7. The following screen will be displayed. To enable the wireless function, select the box (by clicking on it) and input the SSID. Then, click **Next**.

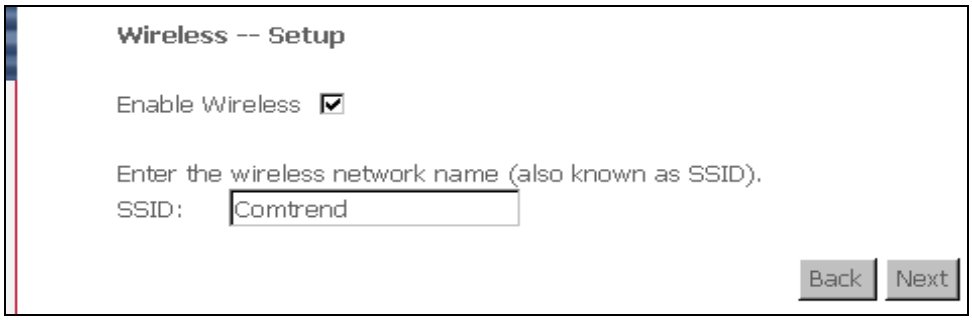

The following screen will be displayed.

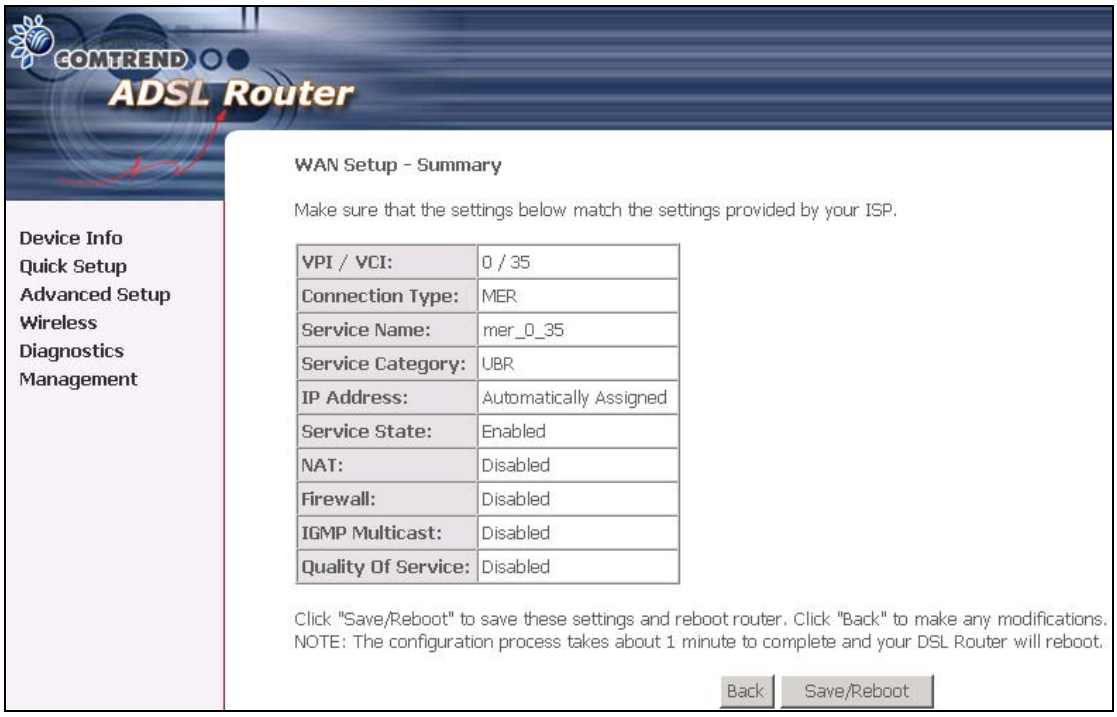
COMTREND
ADSL Router
Device Info
Quick Setup
Advanced Setup
Wireless
Diagnostics
Management
WAN Setup - Summary
Make sure that the settings below match the settings provided by your ISP.
VPI / VCI: 0 / 35
Connection Type: MER
Service Name: mer_0_35
Service Category: UBR
IP Address: Automatically Assigned
Service State: Enabled
NAT: Disabled
Firewall: Disabled
IGMP Multicast: Disabled
Quality Of Service: Disabled
Click "Save/Reboot" to save these settings and reboot router. Click "Back" to make any modifications.
NOTE: The configuration process takes about 1 minute to complete and your DSL Router will reboot.
Back
Save/Reboot

After clicking **Save/Reboot**, the router will save the configuration to the flash memory, and reboot. The Web UI will not respond until the system is brought up again. After the system is up, the Web UI will refresh to the Device Info page automatically. The CT-5361 is ready for operation and the LEDs display as described in the LED description tables.

5.2.3 IP Over ATM

To configure IP Over ATM,

1. Select **Quick Setup** and click **Next**.
2. Enter the PVC Index and click **Next**.
3. Type the VPI and VCI values provided by the ISP and click **Next**.
4. Select the IP over ATM (IPoA) radio button and click **Next**. The following screen appears.

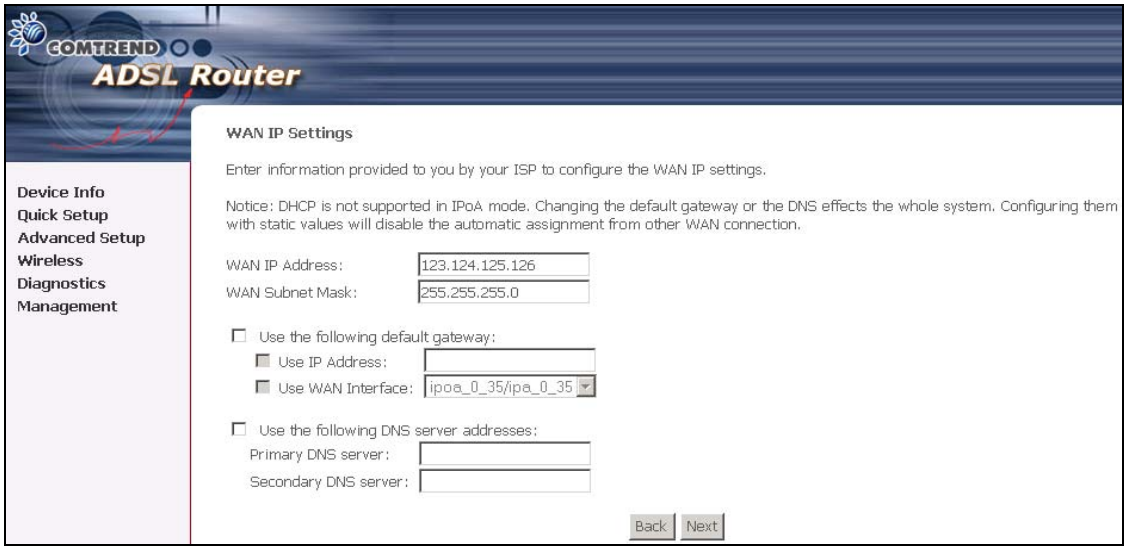
COMTREND
ADSL Router
Device Info
Quick Setup
Advanced Setup
Wireless
Diagnostics
Management
WAN IP Settings
Enter information provided to you by your ISP to configure the WAN IP settings.
Notice: DHCP is not supported in IPoA mode. Changing the default gateway or the DNS effects the whole system. Configuring them with static values will disable the automatic assignment from other WAN connection.
WAN IP Address: 123.124.125.126
WAN Subnet Mask: 255.255.255.0
Use the following default gateway:
Use IP Address:
Use WAN Interface: ipoa_0_35/ipa_0_35
Use the following DNS server addresses:
Primary DNS server:
Secondary DNS server:
Back
Next

Notice that DHCP is not supported over IPoA. The user must enter the IP address or WAN interface for the default gateway setup, and the DNS server addresses provided by the ISP.

5. Click **Next**. The following screen appears.

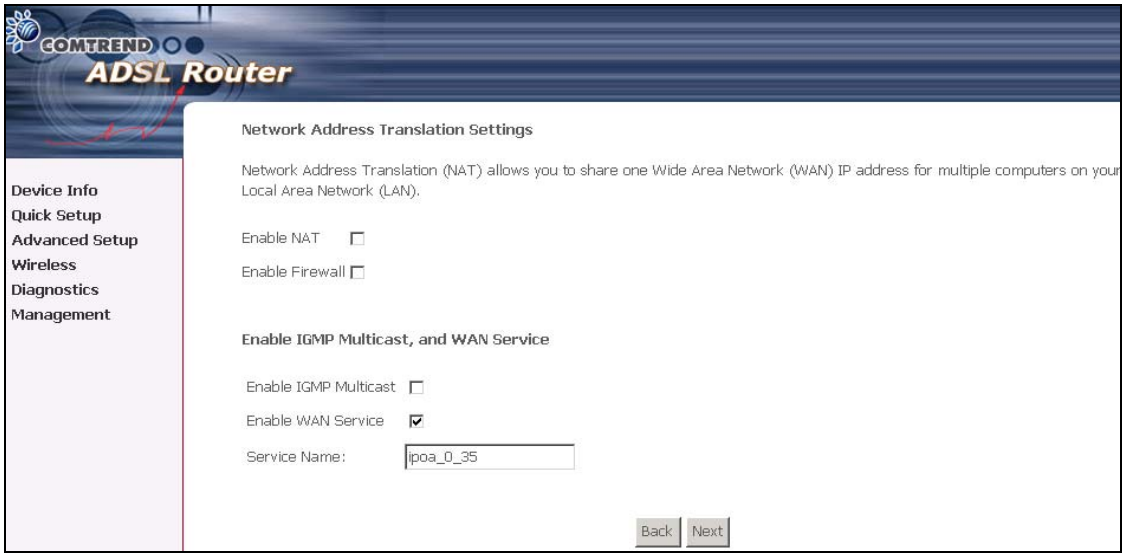

Enable NAT checkbox

If the LAN is configured with a private IP address, the user should select this checkbox. The NAT submenu on the left side main panel will be displayed after reboot. The user can then configure NAT-related features after the system comes up. If a private IP address is not used on the LAN side (i.e. the LAN side is using a public IP), this checkbox should be de-selected. When the system comes back after reboot, the NAT submenu will not be displayed on the left main panel.

Enable Firewall checkbox

If the firewall checkbox is selected, the Security submenu on the left side main panel will be displayed after system reboot. The user can then configure firewall features after the system comes up. If firewall is not used, this checkbox should be de-selected to free up system resources for better performance. When system comes back after reboot, the Security submenu will not be displayed on the left main panel.

Enable Quality Of Service

Enabling IP QoS for a PVC improves performance for selected classes of applications. However, since IP QoS also consumes system resources, the number of PVCs will be reduced consequently. Use **Advanced Setup/Quality of Service** to assign priorities for the applications.

6. Click **Next** to display the following screen. The Device Setup page allows the user to configure the LAN interface IP address and DHCP server if the user would like this ADSL router to assign dynamic IP addresses, DNS server and default gateway to other LAN devices. Select the button Enable DHCP server on the LAN to enter the starting IP address and end IP address and DHCP lease time.

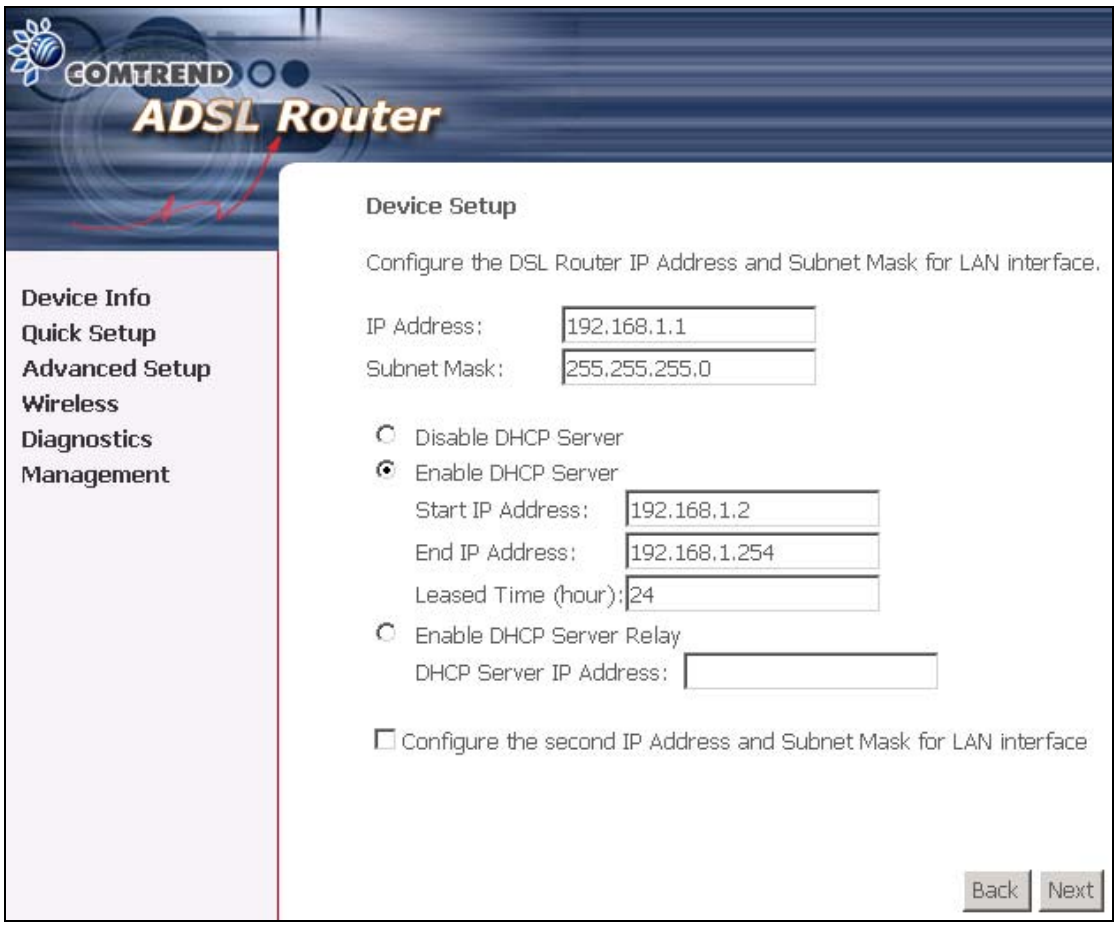

The user must configure the IP Address and the Subnet Mask. To use the DHCP service on the LAN, select the **Enable DHCP server** checkbox, and enter the Start IP addresses, the End IP address and DHCP lease time. This configures the router to automatically assign IP addresses, default gateway address and DNS server addresses to each of your PCs.

Note that the router's default IP address is 192.168.1.1 and the default private address range provided by ISP server in the router is 192.168.1.2 through 192.168.1.254.

Select **Enable DHCP Server Relay** (if required), and enter the DHCP Server IP Address.

7. The WAN Setup-Summary screen presents the entire configuration summary. Click **Save/Reboot** if the settings are correct. Click **Back** if you wish to modify the settings.

8. The following screen will be displayed. To enable the wireless function, select the box (by clicking on it) and input the SSID. Then, click **Next**.

The following screen will be displayed.

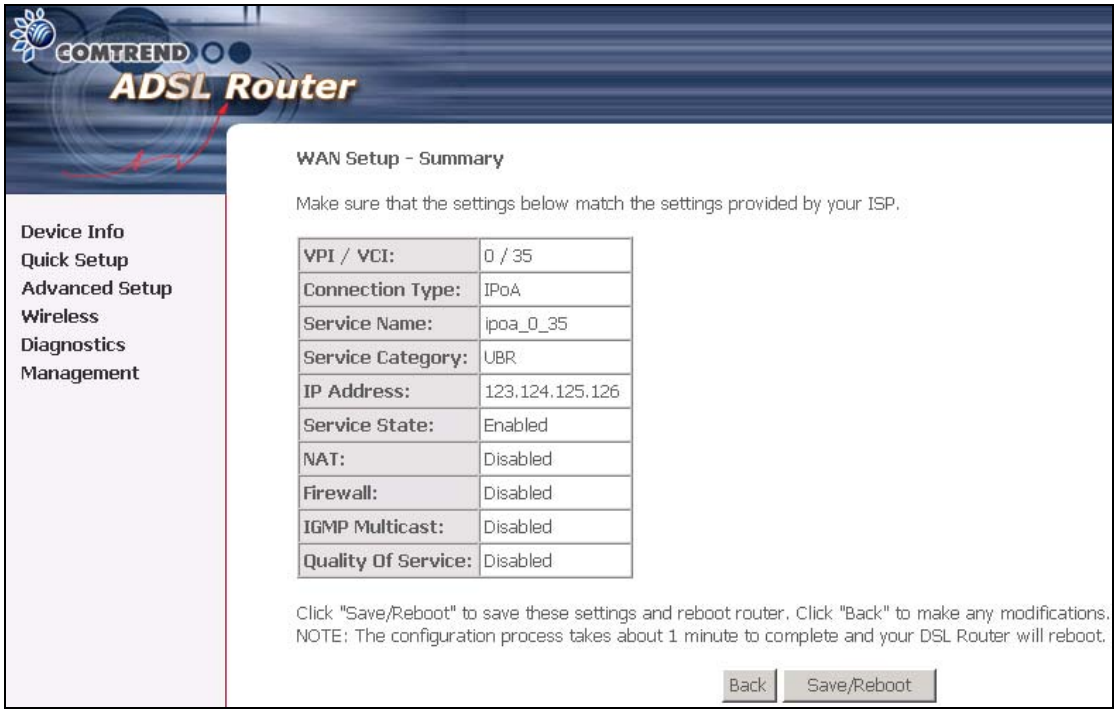

9. After clicking **Save/Reboot**, the router will save the configuration to the flash memory, and reboot. The Web UI will not respond until the system is brought up again. After the system is up, the Web UI will refresh to the Device Info page automatically. The CT-5361 is ready for operation and the LEDs display as described in the LED description tables.

5.2.4 Bridging

Select the bridging mode. To configure Bridging, do the following.

1. Select Quick Setup and click **Next**.
2. Enter the PVC Index and click **Next**.
3. Type in the VPI and VCI values provided by the ISP and click Next.
4. Select the Bridging radio button and click **Next**. The following screen appears. To use the bridge service, tick the checkbox, Enable Bridge Service, and enter the service name.

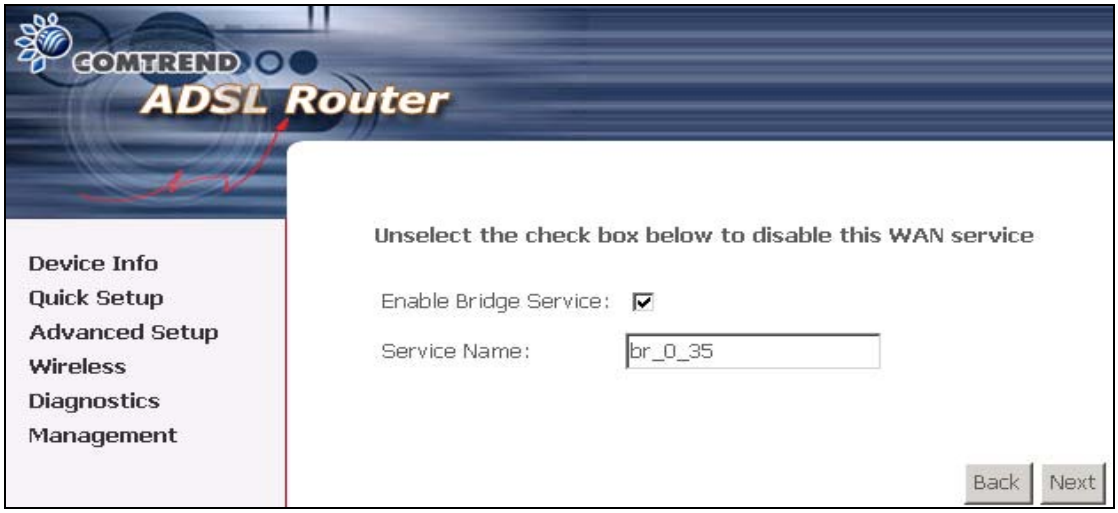

5. Click the **Next** button to continue. Enter the IP address for the LAN interface. The default IP address is 192.168.1.1. The LAN IP interface in bridge operating mode is needed for local users to manage the ADSL router. Notice that there is no IP address for the WAN interface in bridge mode, and the remote technical support cannot access the ADSL router.

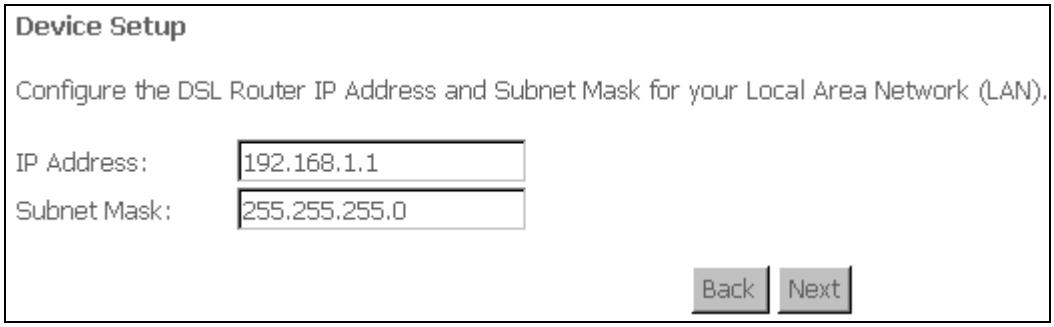

6. The following screen will be displayed. To enable the wireless function, select the box (by clicking on it) and input the SSID. Then, click **Next**.

The following screen will be displayed.

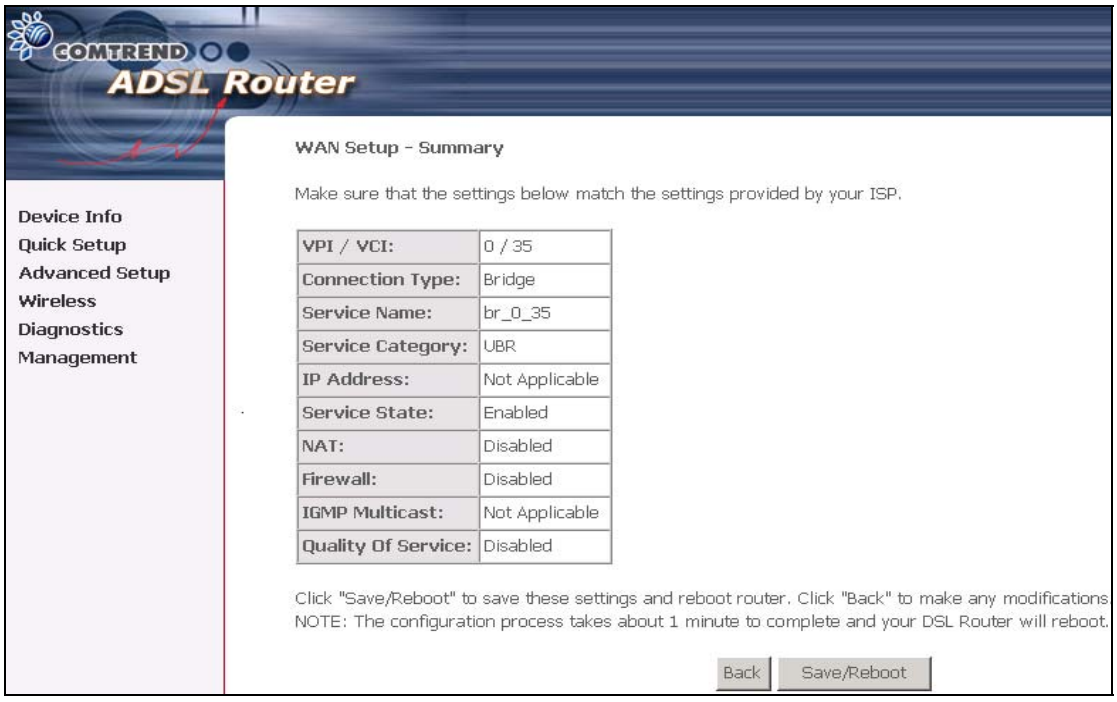
COMTREND
ADSL Router
WAN Setup - Summary
Make sure that the settings below match the settings provided by your ISP.
VPI / VCI: 0 / 35
Connection Type: Bridge
Service Name: br_0_35
Service Category: UBR
IP Address: Not Applicable
Service State: Enabled
NAT: Disabled
Firewall: Disabled
IGMP Multicast: Not Applicable
Quality Of Service: Disabled
Click "Save/Reboot" to save these settings and reboot router. Click "Back" to make any modifications
NOTE: The configuration process takes about 1 minute to complete and your DSL Router will reboot.
Back
Save/Reboot
Device Info
Quick Setup
Advanced Setup
Wireless
Diagnostics
Management

The WAN Setup-Summary screen presents the entire configuration summary. Click **Save/Reboot** if the settings are correct. Click **Back** if you wish to modify the settings.

Chapter 6 Advanced Setup

This chapter explains: WAN, LAN, Routing, DSL and Port Mapping…...

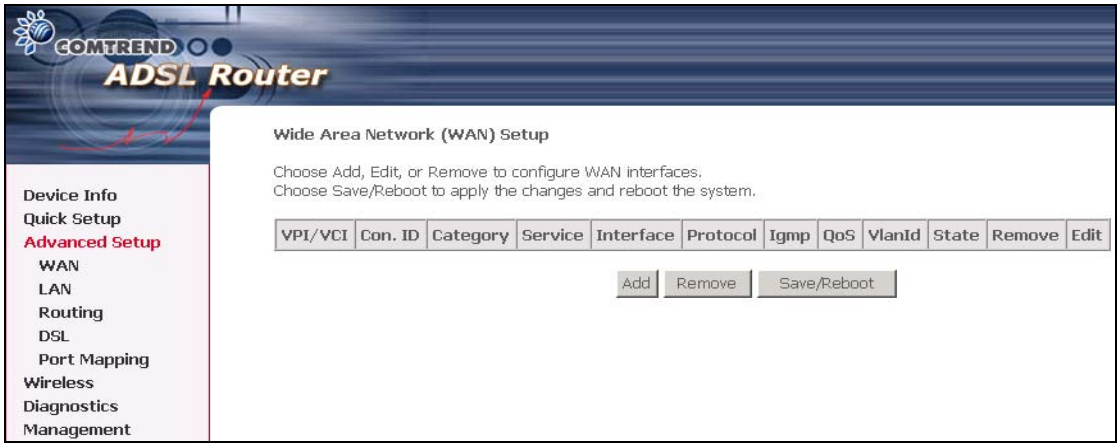

VPI/VCI	ATM VPI (0-255) / VCI (32-65535)
Con. ID	ID for WAN connection
Category	ATM service category, e.g. UBR, CBR…
Service	Name of the WAN connection
Interface	Name of the interface for WAN
Protocol	Shows bridge or router mode
IGMP	Shows enable or disable IGMP proxy
QoS	Shows enable or disable QoS
VLanID	This function means one can add a 802.1Q VLAN tag on PPPoE/MER or Bridge mode.
State	Shows enable or disable WAN connection

It means the packet send to WAN and it will be added specific vlan id(802.1Q tag) on ethernet header. The VlanID shows to which 802.1Q tag will be added.

6.1 WAN

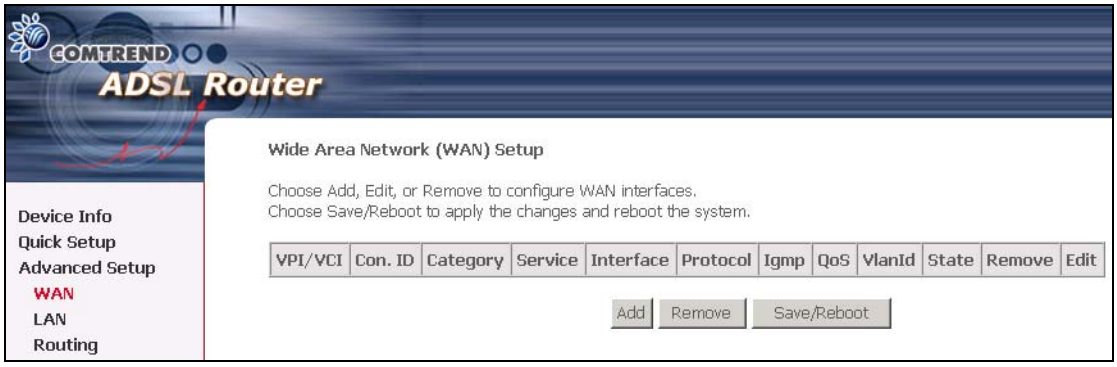

For further information on WAN please reference section: 4.1, Page 15.

6.2 LAN

Configure the DSL Router IP Address and Subnet Mask for LAN interface. Save button only saves the LAN configuration data. Save/Reboot button saves the LAN configuration data and reboots the router to make the new configuration effective.

IP Address: Enter the IP address for the LAN port.

Subnet Mask: Enter the subnet mask for the LAN port.

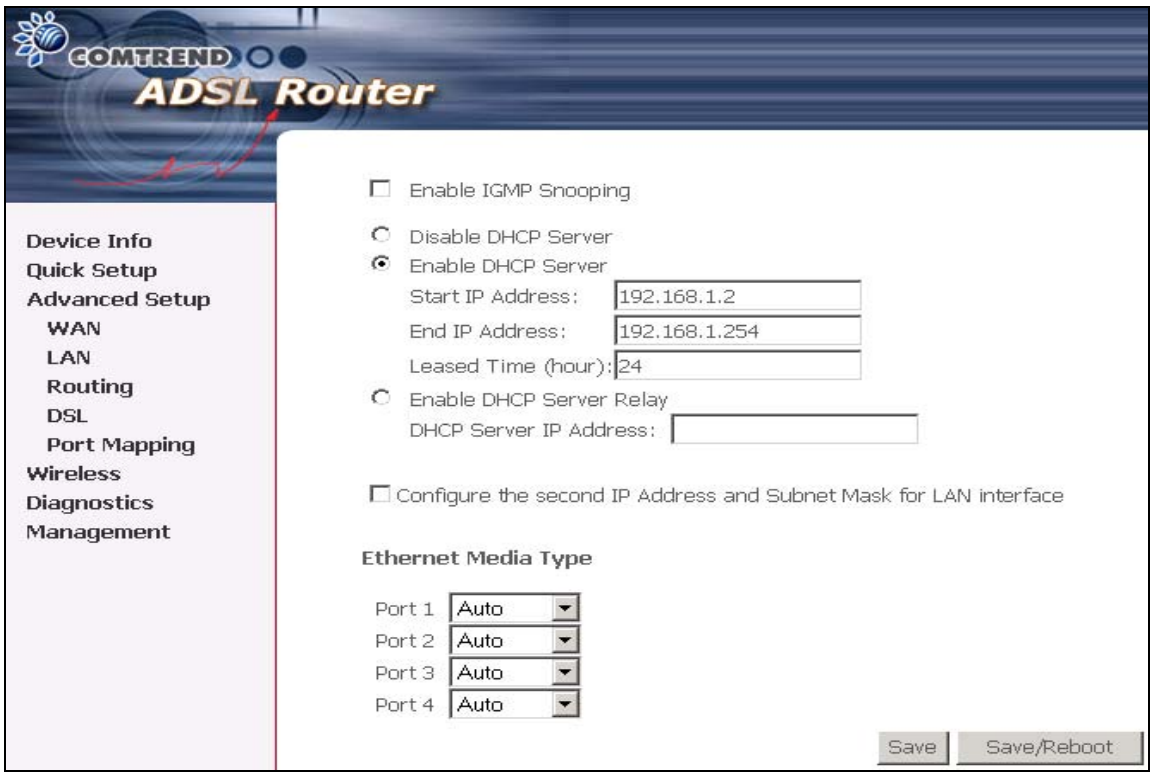

To configure a secondary IP address for the LAN port, click the box as shown below.

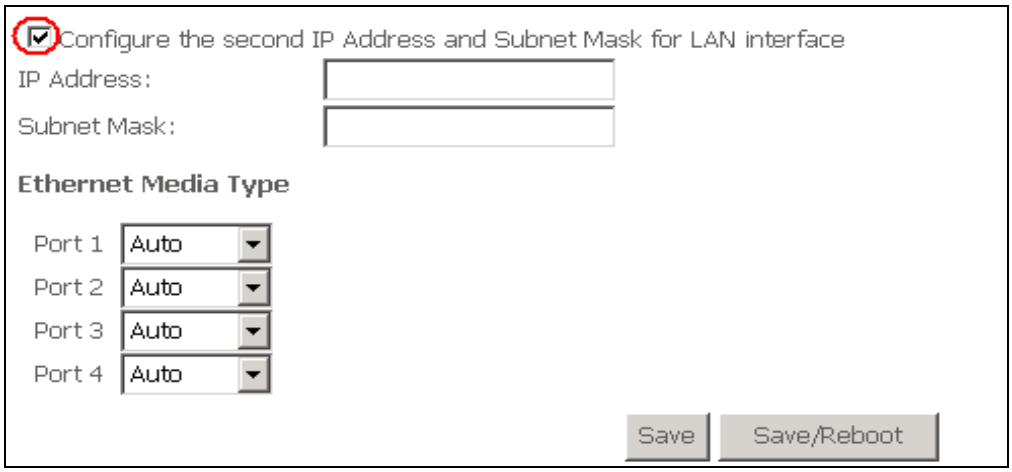

IP Address: Enter the secondary IP address for the LAN port.

Subnet Mask: Enter the secondary subnet mask for the LAN port.

6.3 NAT

To display the NAT function, you need to enable the NAT feature in the WAN Setup.

6.3.1 Virtual Servers

Virtual Server allows you to direct incoming traffic from WAN side (identified by Protocol and External port) to the Internal server with private IP address on the LAN side. The Internal port is required only if the external port needs to be converted to a different port number used by the server on the LAN side. A maximum 32 entries can be configured.

To add a Virtual Server, simply click the **Add** button. The following will be displayed.

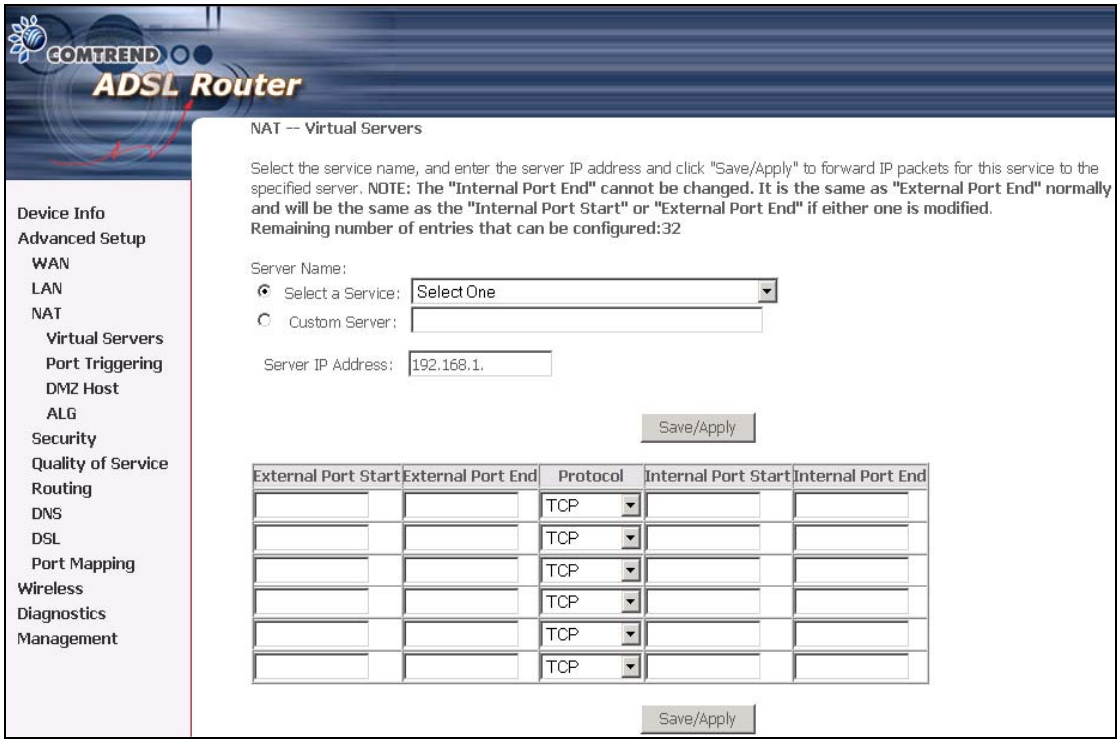

Select a Service Or Custom Server	User should select the service from the list. Or User can enter the name of their choice.
Server IP Address	Enter the IP address for the server.
External Port Start	Enter the starting external port number (when you select Custom Server). When a service is selected the port ranges are automatically configured.
External Port End	Enter the ending external port number (when you select Custom Server). When a service is selected the port ranges are automatically configured.
Protocol	User can select from: TCP, TCP/UDP or UDP.
Internal Port Start	Enter the internal port starting number (when you select Custom Server). When a service is selected the port ranges are automatically configured
Internal Port End	Enter the internal port ending number (when you select Custom Server). When a service is selected the port ranges are automatically configured.

6.3.2 Port Triggering

Some applications require that specific ports in the Router's firewall be opened for access by the remote parties. Port Trigger dynamically opens up the 'Open Ports' in the firewall when an application on the LAN initiates a TCP/UDP connection to a remote party using the 'Triggering Ports'. The Router allows the remote party from the WAN side to establish new connections back to the application on the LAN side using the 'Open Ports'. A maximum 32 entries can be configured.

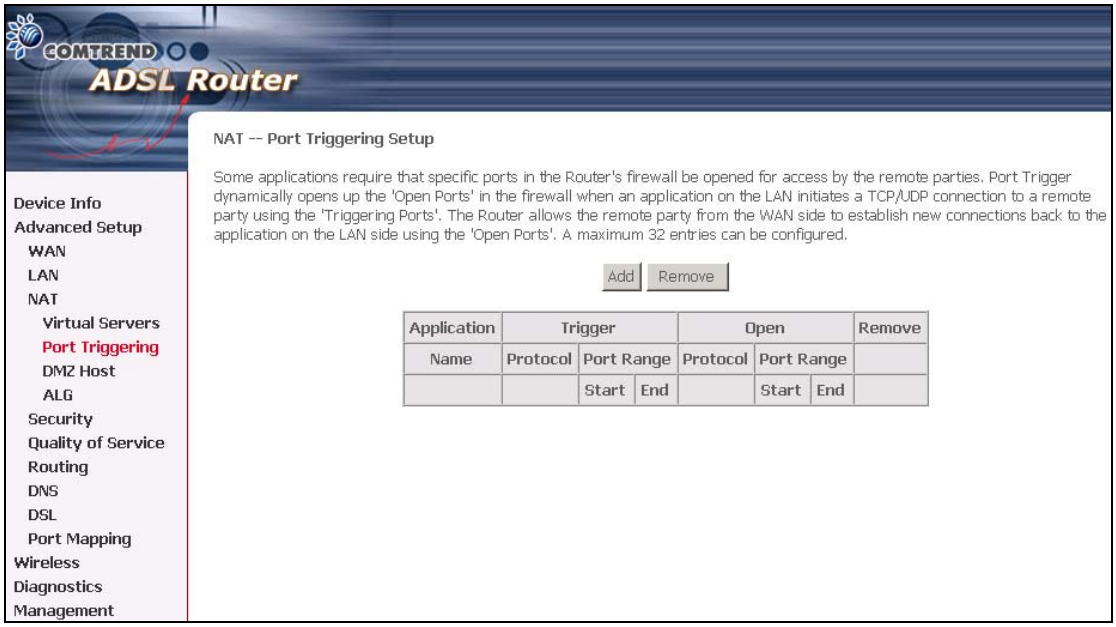

To add a Trigger Port, simply click the Add button. The following will be displayed.

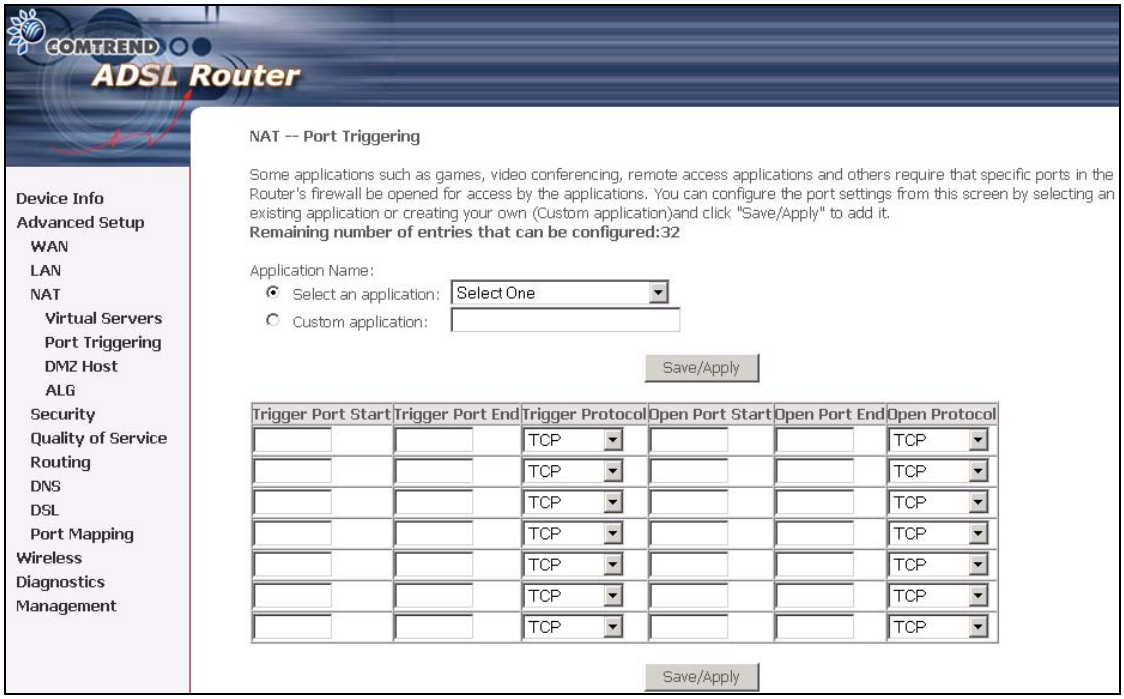

Select an Application **Or** Custom Application	User should select the application from the list. **Or** User can enter the name of their choice.
Trigger Port Start	Enter the starting trigger port number (when you select custom application). When an application is selected the port ranges are automatically configured.
Trigger Port End	Enter the ending trigger port number (when you select custom application). When an application is selected the port ranges are automatically configured.
Trigger Protocol	User can select from: TCP, TCP/UDP or UDP.
Open Port Start	Enter the starting open port number (when you select custom application). When an application is selected the port ranges are automatically configured.
Open Port End	Enter the ending open port number (when you select custom application). When an application is selected the port ranges are automatically configured.
Open Protocol	User can select from: TCP, TCP/UDP or UDP.

6.3.3 DMZ Host

The DSL router will forward IP packets from the WAN that do not belong to any of the applications configured in the Virtual Servers table to the DMZ host computer.

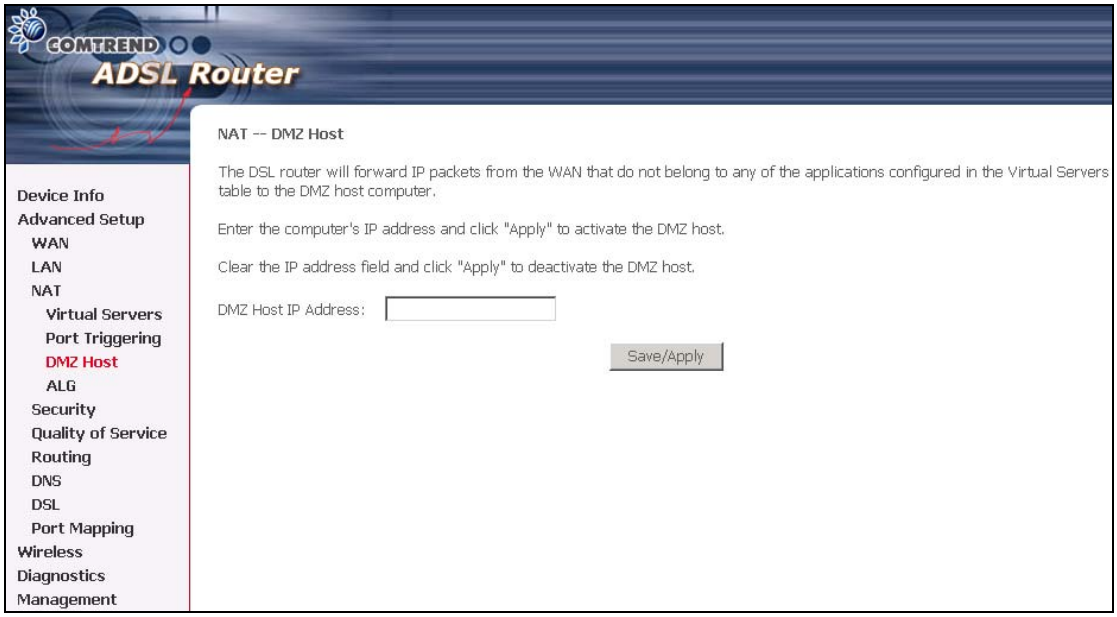

Enter the computer's IP address and click "Apply" to activate the DMZ host.

Clear the IP address field and click "Apply" to deactivate the DMZ host.

6.3.4 ALG

SIP ALG is Application layer gateway. If the user has an IP phone(SIP) or VoIP gateway(SIP) behind the ADSL router, the SIP ALG can help VoIP packet passthrough the router (NAT enabled).

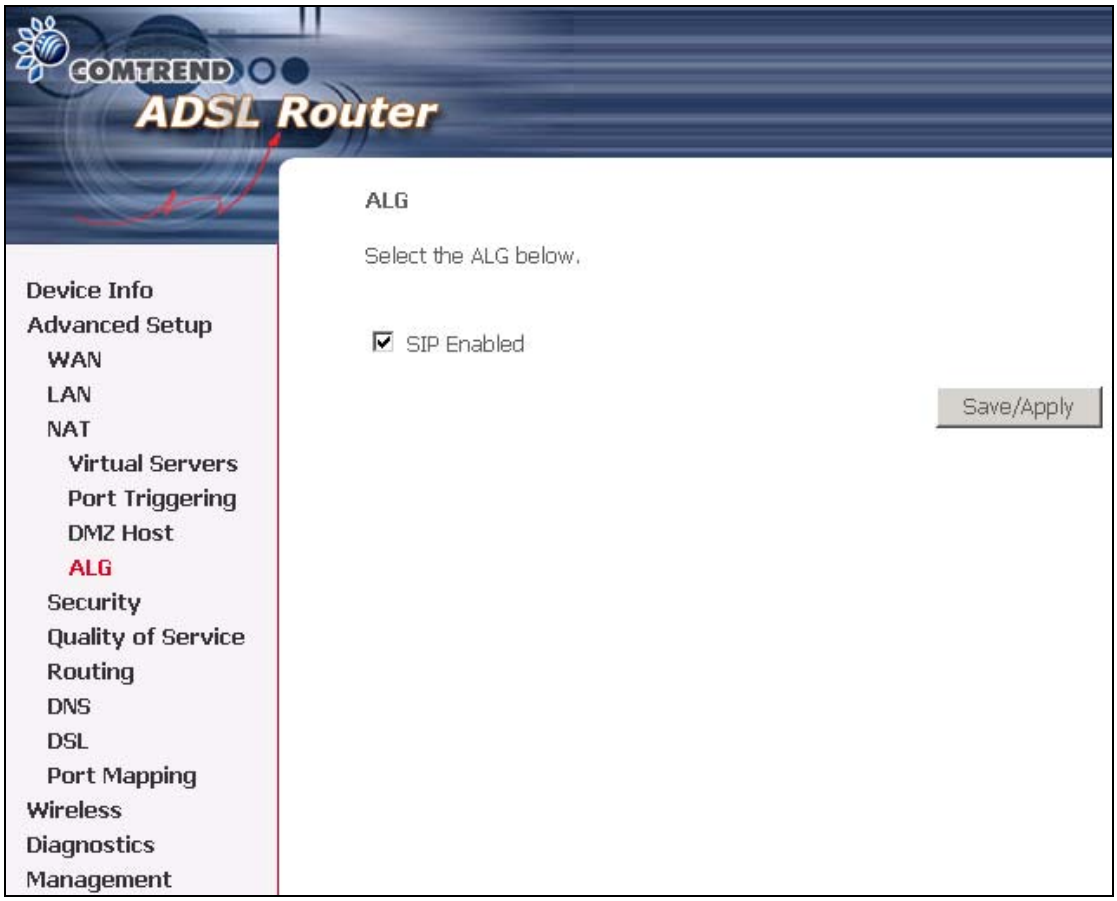

Note: SIP (Session Initiation Protocol, RFC3261) is the protocol of choice for most VoIP (Voice over IP) phones to initiate communication.

6.4 Security

To display the Security function, you need to enable the firewall feature in the WAN Setup.

6.4.1 IP Filtering

IP filtering allows you to create a filter rule to identify outgoing/incoming IP traffic by specifying a new filter name and at least one condition below. All of the specified conditions in this filter rule must be satisfied for the rule to take effect. Click 'Save/Apply' to save and activate the filter.

Outgoing

Note: The default setting for Outgoing is Blocked.

To add a filtering rule, simply click the Add button. The following screen will be displayed.

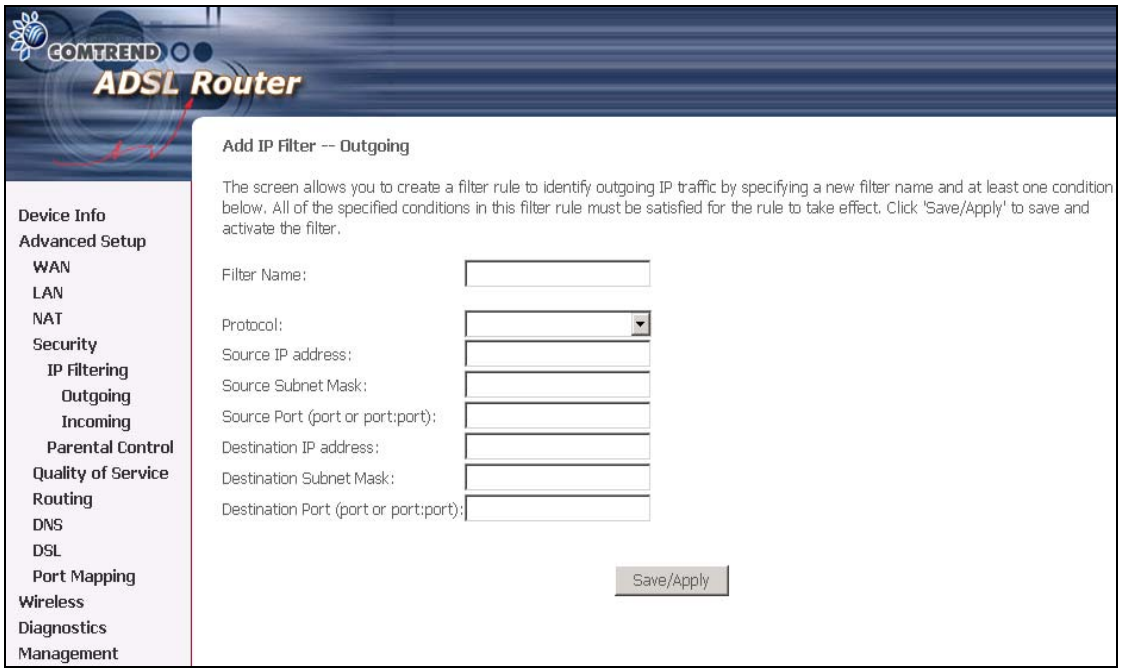

Filter Name	Type a name for the filter rule.
Protocol	User can select from: TCP, TCP/UDP, UDP or ICMP.
Source IP address	Enter source IP address.
Source Subnet Mask	Enter source subnet mask.
Source Port (port or port:port)	Enter source port number.
Destination IP address	Enter destination IP address.
Destination Subnet Mask	Enter destination subnet mask.
Destination port (port or port:port)	Enter destination port number.

Incoming

Note: The default setting for Incoming is Accepted.

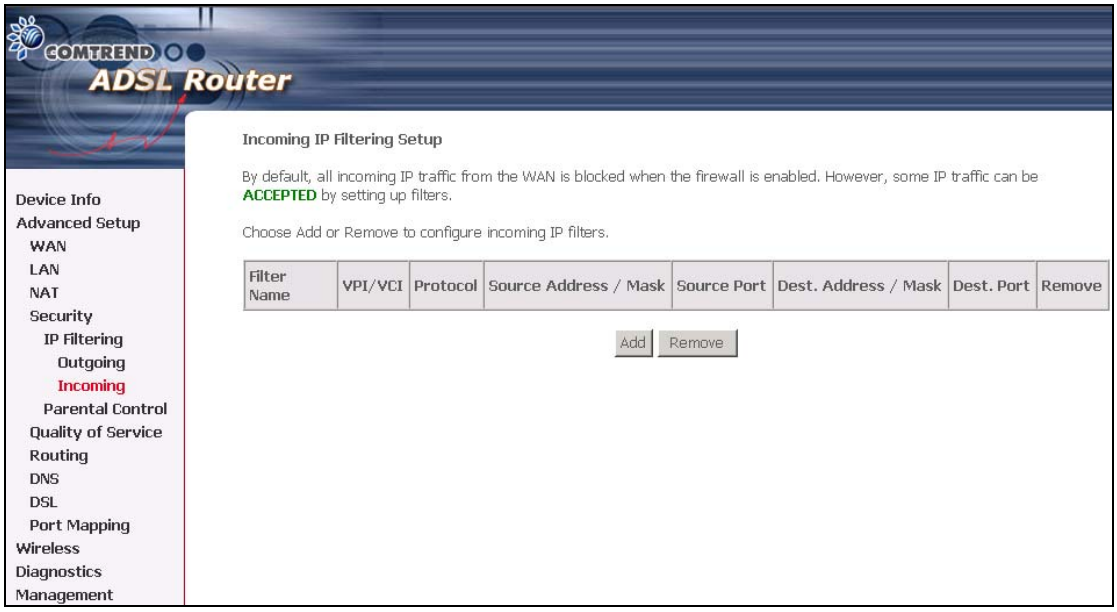

To add a filtering rule, simply click the Add button. The following screen will be displayed.

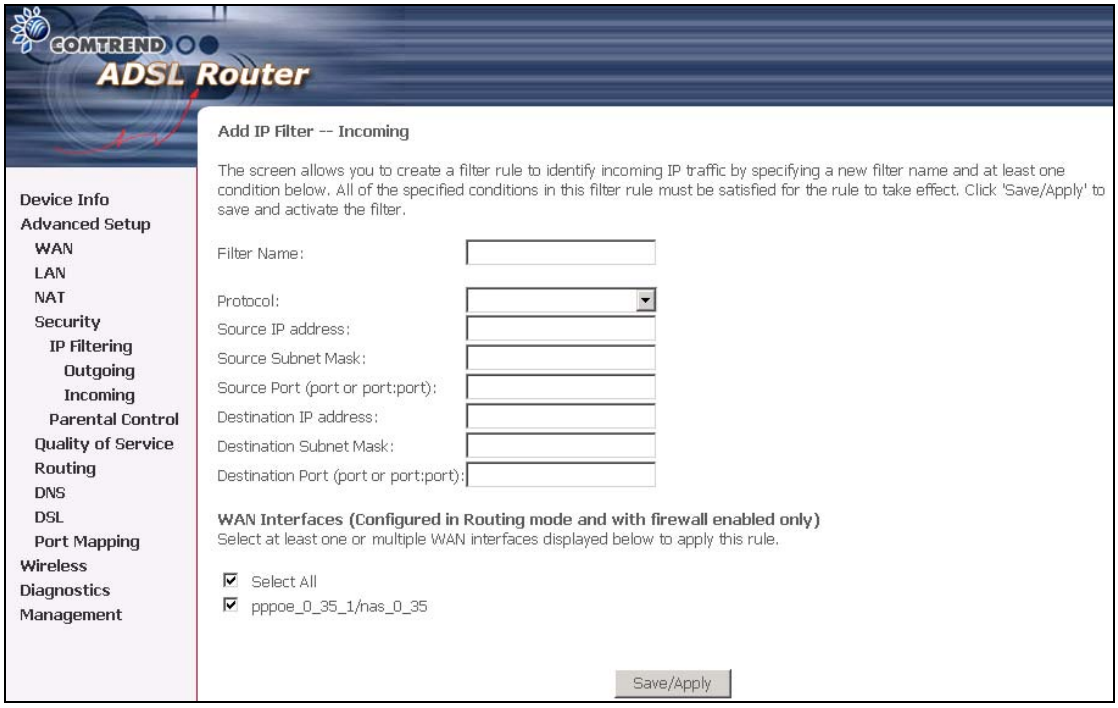
COMTREND
ADSL Router
Device Info
Advanced Setup
WAN
LAN
NAT
Security
IP Filtering
Outgoing
Incoming
Parental Control
Quality of Service
Routing
DNS
DSL
Port Mapping
Wireless
Diagnostics
Management
Add IP Filter -- Incoming
The screen allows you to create a filter rule to identify incoming IP traffic by specifying a new filter name and at least one condition below. All of the specified conditions in this filter rule must be satisfied for the rule to take effect. Click 'Save/Apply' to save and activate the filter.
Filter Name:
Protocol:
Source IP address:
Source Subnet Mask:
Source Port (port or port:port):
Destination IP address:
Destination Subnet Mask:
Destination Port (port or port:port):
WAN Interfaces (Configured in Routing mode and with firewall enabled only)
Select at least one or multiple WAN interfaces displayed below to apply this rule.
Select All
pppoe_0_35_1/nas_0_35
Save/Apply

To configure the parameters, please reference **Outgoing** table above.

6.4.2 Parental Control

Parental control: allows parents, schools, and libraries to set access times for Internet use.

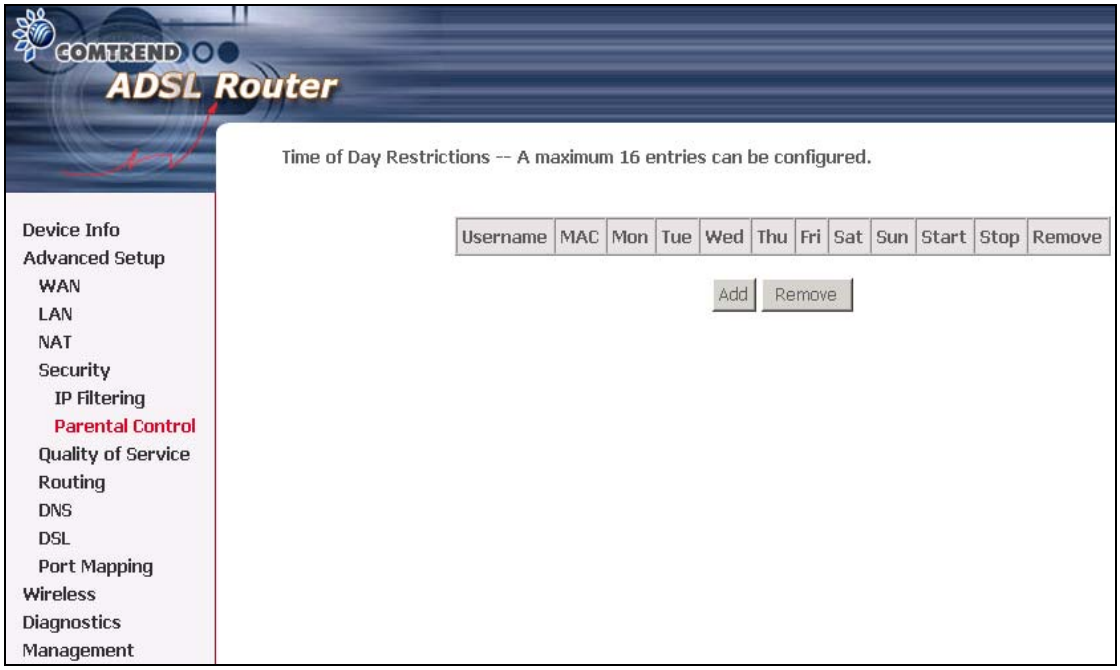

To add a parental control, simply click the Add button. The following screen will be displayed.

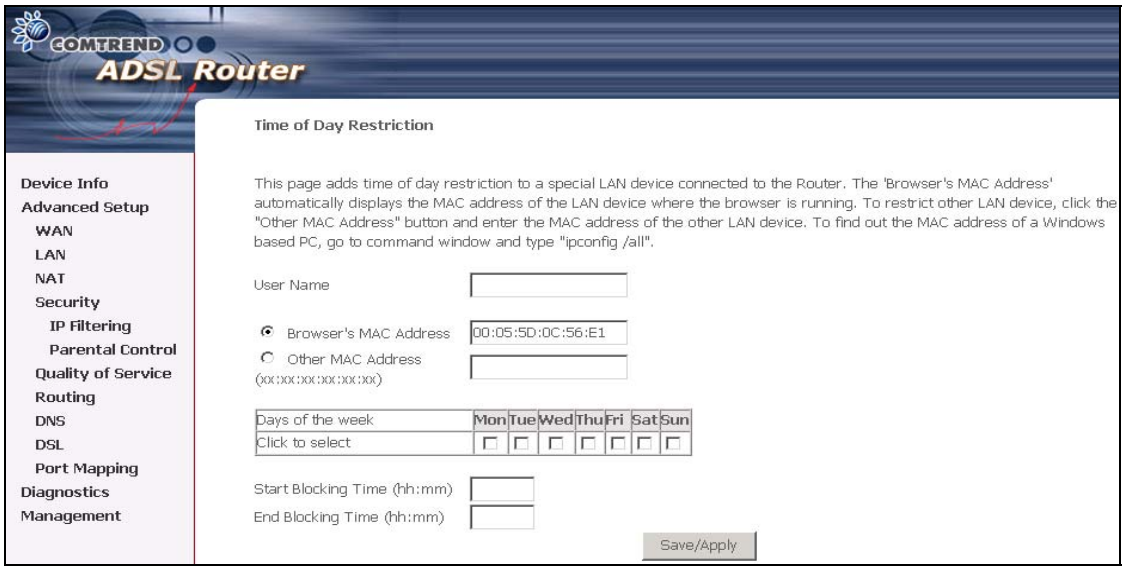
COMTREND
ADSL Router
Time of Day Restriction
This page adds time of day restriction to a special LAN device connected to the Router. The 'Browser's MAC Address' automatically displays the MAC address of the LAN device where the browser is running. To restrict other LAN device, click the "Other MAC Address" button and enter the MAC address of the other LAN device. To find out the MAC address of a Windows based PC, go to command window and type "ipconfig /all".
User Name
Browser's MAC Address
00:05:5D:0C:56:E1
Other MAC Address
(xx:xx:xx:xx:xx:xx)
Days of the week
Mon Tue Wed Thu Fri Sat Sun
Click to select
Start Blocking Time (hh:mm)
End Blocking Time (hh:mm)
Save/Apply

Username:	Input Internet access user name
MAC:	Set the MAC address to access the Internet
Mon, Tue, Wed, Thu, Fri, Sat, Sun:	Set which days that will have block restrictions to Internet access
Start, Stop:	Set Internet block start and stop time

6.5 Quality of Service

To display the Security function, you need to enable the QoS feature in the WAN Setup.

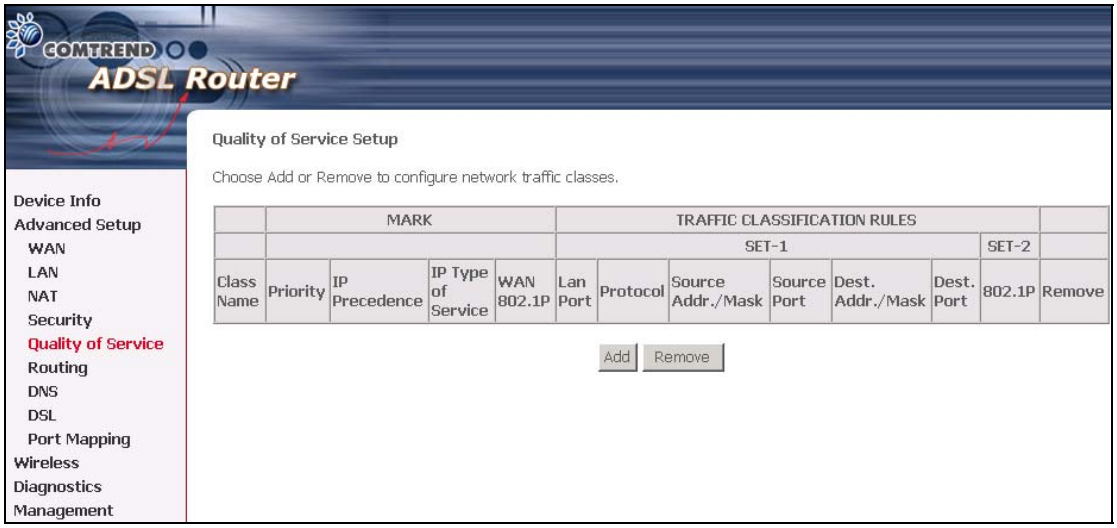

Choose **Add** to configure network traffic classes. The following screen will be displayed:

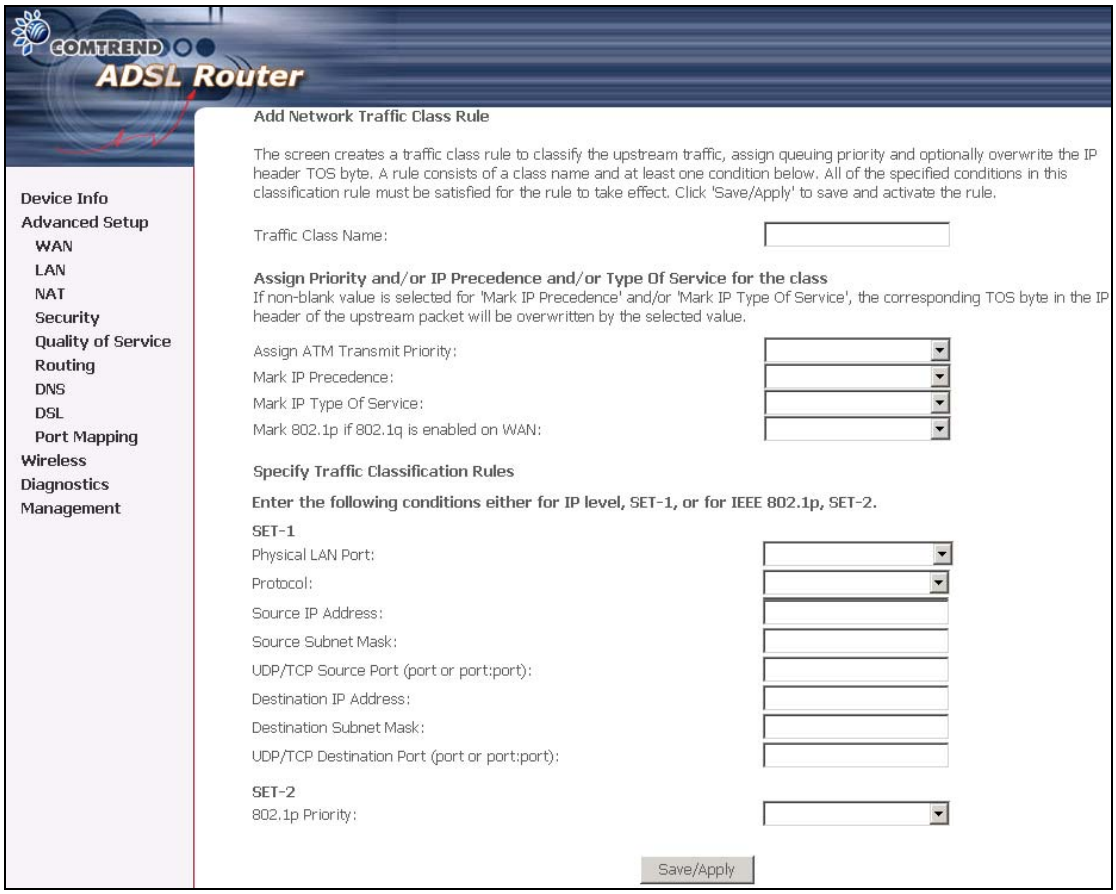
COMTREND
ADSL Router
Add Network Traffic Class Rule
The screen creates a traffic class rule to classify the upstream traffic, assign queuing priority and optionally overwrite the IP header TOS byte. A rule consists of a class name and at least one condition below. All of the specified conditions in this classification rule must be satisfied for the rule to take effect. Click 'Save/Apply' to save and activate the rule.
Traffic Class Name:
Assign Priority and/or IP Precedence and/or Type Of Service for the class
If non-blank value is selected for 'Mark IP Precedence' and/or 'Mark IP Type Of Service', the corresponding TOS byte in the IP header of the upstream packet will be overwritten by the selected value.
Assign ATM Transmit Priority:
Mark IP Precedence:
Mark IP Type Of Service:
Mark 802.1p if 802.1q is enabled on WAN:
Specify Traffic Classification Rules
Enter the following conditions either for IP level, SET-1, or for IEEE 802.1p, SET-2.
SET-1
Physical LAN Port:
Protocol:
Source IP Address:
Source Subnet Mask:
UDP/TCP Source Port (port or port:port):
Destination IP Address:
Destination Subnet Mask:
UDP/TCP Destination Port (port or port:port):
SET-2
802.1p Priority:
Save/Apply
Device Info
Advanced Setup
WAN
LAN
NAT
Security
Quality of Service
Routing
DNS
DSL
Port Mapping
Wireless
Diagnostics
Management

Traffic Class Name	Enter name for traffic class
Priority	Select Low, Medium or High.
IP Precedence	Select between 0-7. The lower the digit shows the higher the priority
IP Type Of Service	Select either: Normal Service, Minimize Cost, Maximize Reliability, Maximize Throughput, Minimize Delay
Physical LAN Port	User can select from: ENET, ENET(1-4), USB or Wireless.
Protocol	User can select from: TCP, TCP/UDP, UDP or ICMP.
Source IP Address	Enter the source IP address.
Source Subnet Mask	Enter the subnet mask for the source IP address.
Source Port (port or port:port)	Enter source port number.
Destination IP address	Enter destination IP address.
Destination Subnet Mask	Enter destination subnet mask.
Destination port (port or port:port)	Enter destination port number.
802.1p Priority	Select between 0-7. The lower the digit shows the higher the priority

6.6 Routing

The Routing dialog box allows you to configure Default gateway, Static Route and RIP.

6.6.1 Default Gateway

If **'Enable Automatic Assigned Default Gateway'** checkbox is selected, this router will accept the first received default gateway assignment from one of the PPPoA, PPPoE or MER/DHCP enabled PVC(s). If the checkbox is not selected, enter the static default gateway AND/OR a WAN interface. Click 'Save/Apply' button to save it.

NOTE: If changing the Automatic Assigned Default Gateway from unselected to selected, You must reboot the router to get the automatic assigned default gateway.

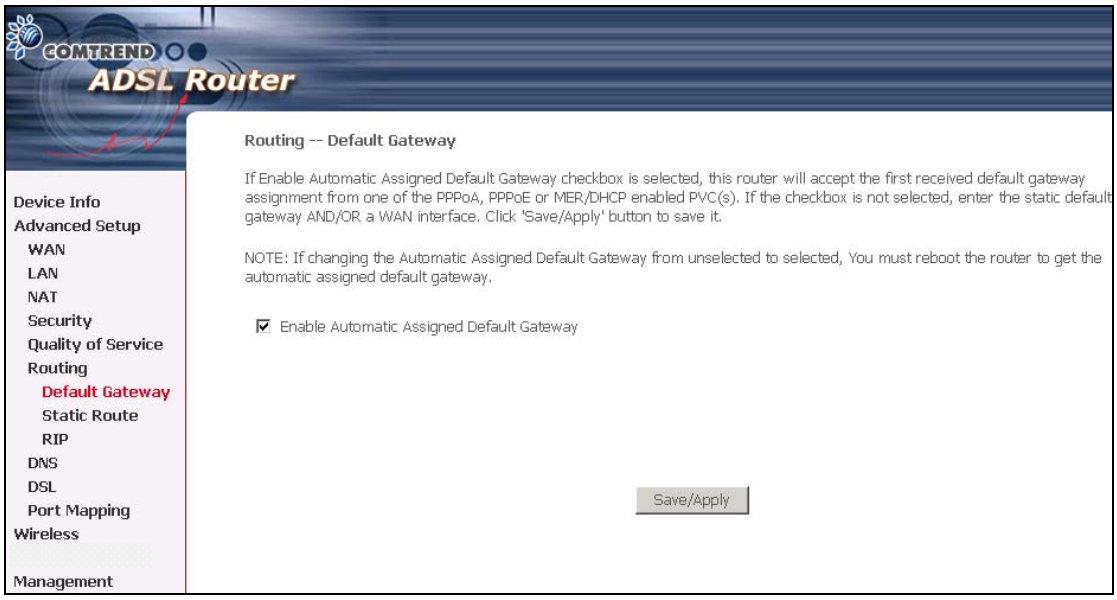
COMTREND
ADSL Router
Device Info
Advanced Setup
WAN
LAN
NAT
Security
Quality of Service
Routing
Default Gateway
Static Route
RIP
DNS
DSL
Port Mapping
Wireless
Management
Routing -- Default Gateway
If Enable Automatic Assigned Default Gateway checkbox is selected, this router will accept the first received default gateway assignment from one of the PPPoA, PPPoE or MER/DHCP enabled PVC(s). If the checkbox is not selected, enter the static default gateway AND/OR a WAN interface. Click 'Save/Apply' button to save it.
NOTE: If changing the Automatic Assigned Default Gateway from unselected to selected, You must reboot the router to get the automatic assigned default gateway.
Enable Automatic Assigned Default Gateway
Save/Apply

6.6.2 Static Route

Choose **Static Route** to display the Static Route screen. The Static Route screen lists the configured static routes, and allows configuring static routes. Choose **Add** or **Remove** to configure the static routes.

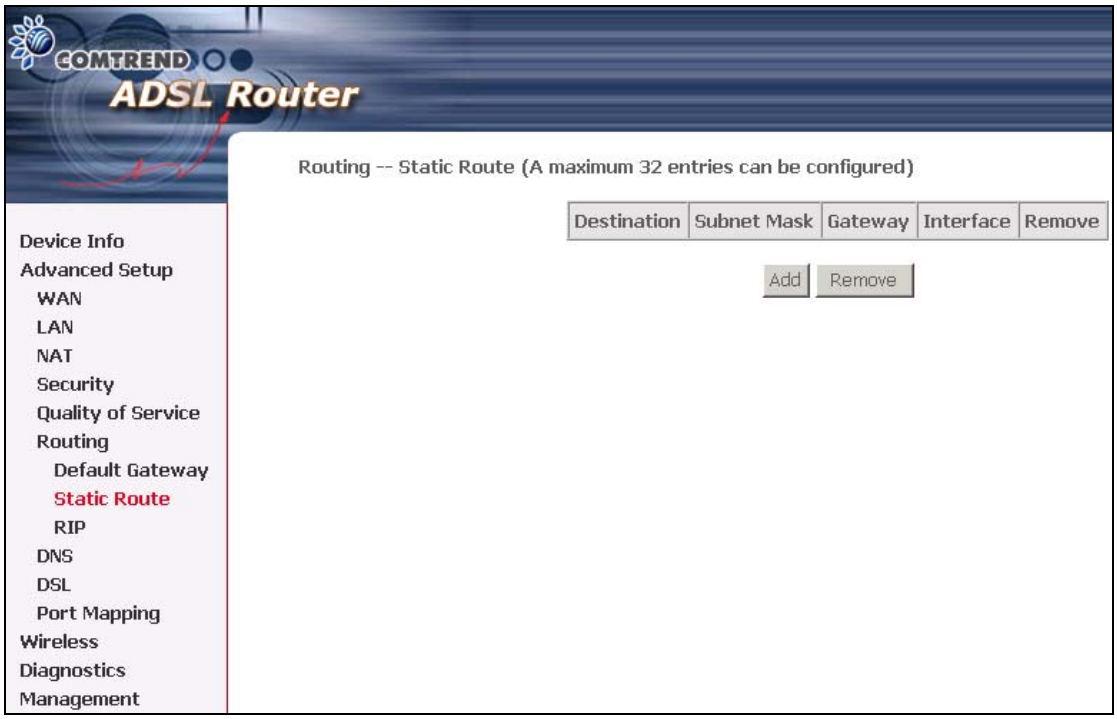

To add static route, click the **Add** button to display the following screen. Enter the destination network address, subnet mask, gateway AND/OR available WAN interface then click **Save/Apply** to add the entry to the routing table.

6.6.3 RIP

To activate RIP for the device, select the 'Enabled' radio button for Global RIP Mode. To configure an individual interface, select the desired RIP version and operation, followed by placing a check in the 'Enabled' checkbox for the interface. Click the 'Save/Apply' button to save the configuration, and to start or stop RIP based on the Global RIP mode selected.

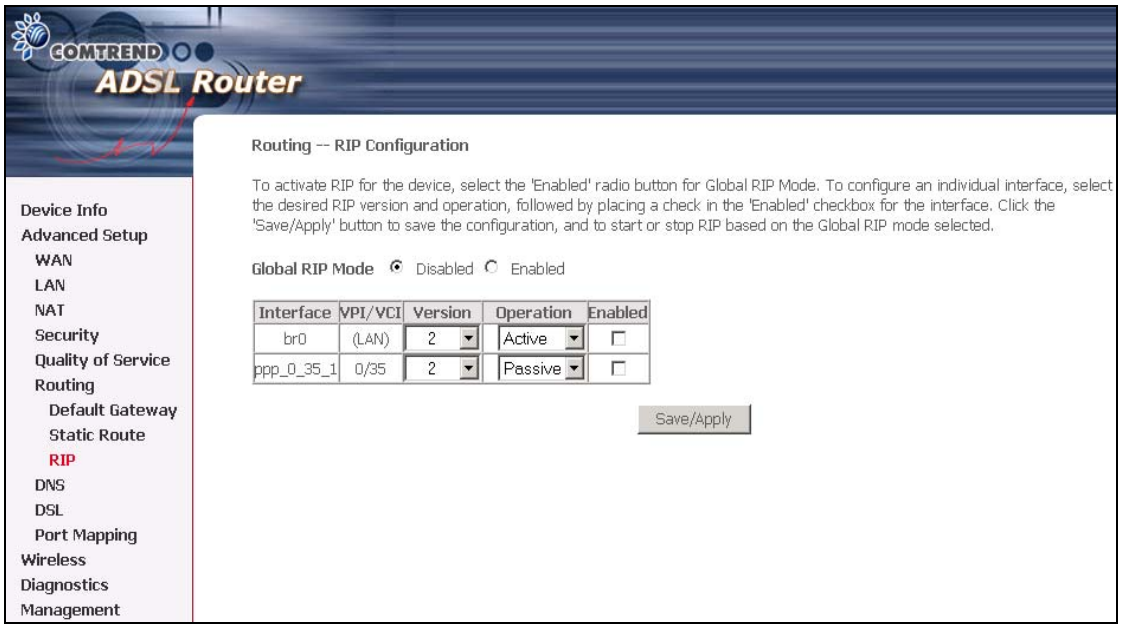
COMTREND
ADSL Router
Device Info
Advanced Setup
WAN
LAN
NAT
Security
Quality of Service
Routing
Default Gateway
Static Route
RIP
DNS
DSL
Port Mapping
Wireless
Diagnostics
Management
Routing -- RIP Configuration
To activate RIP for the device, select the 'Enabled' radio button for Global RIP Mode. To configure an individual interface, select the desired RIP version and operation, followed by placing a check in the 'Enabled' checkbox for the interface. Click the 'Save/Apply' button to save the configuration, and to start or stop RIP based on the Global RIP mode selected.
Global RIP Mode Disabled Enabled
Interface VPI/VCI Version Operation Enabled
br0 (LAN) 2 Active
ppp_0_35_1 0/35 2 Passive
Save/Apply

6.7 DNS

6.7.1 DNS Server

If 'Enable Automatic Assigned DNS' checkbox is selected, this router will accept the first received DNS assignment from one of the PPPoA, PPPoE or MER/DHCP enabled PVC(s) during the connection establishment. If the checkbox is not selected, enter the primary and optional secondary DNS server IP addresses. Click 'Save' button to save the new configuration. You must reboot the router to make the new configuration effective.

COMTREND
ADSL Router
Device Info
Advanced Setup
WAN
LAN
NAT
Security
Quality of Service
Routing
DNS
DNS Server
Dynamic DNS
DSL
Port Mapping
Wireless
Diagnostics
Management
DNS Server Configuration
If 'Enable Automatic Assigned DNS' checkbox is selected, this router will accept the first received DNS assignment from one of the PPPoA, PPPoE or MER/DHCP enabled PVC(s) during the connection establishment. If the checkbox is not selected, enter the primary and optional secondary DNS server IP addresses. Click 'Save' button to save the new configuration. You must reboot the router to make the new configuration effective.
Enable Automatic Assigned DNS
Save

6.7.2 Dynamic DNS

The Dynamic DNS service allows you to alias a dynamic IP address to a static hostname in any of the many domains, allowing your DSL router to be more easily accessed from various locations on the Internet.

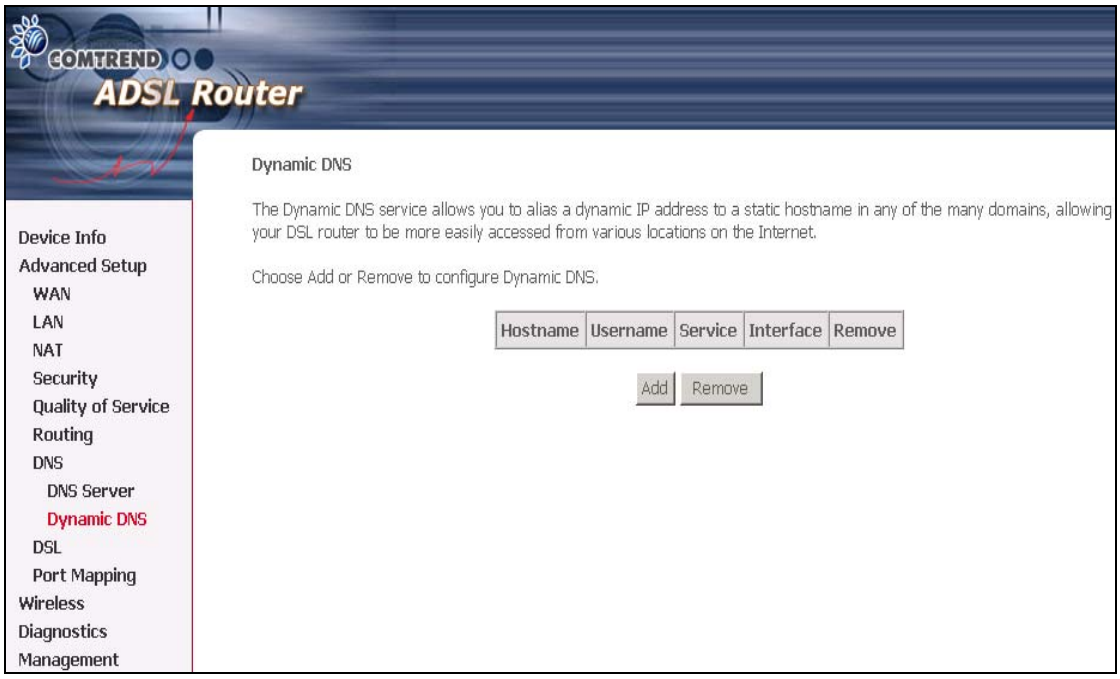

To add a dynamic DNS service, simply click the Add button. The following screen will be displayed:

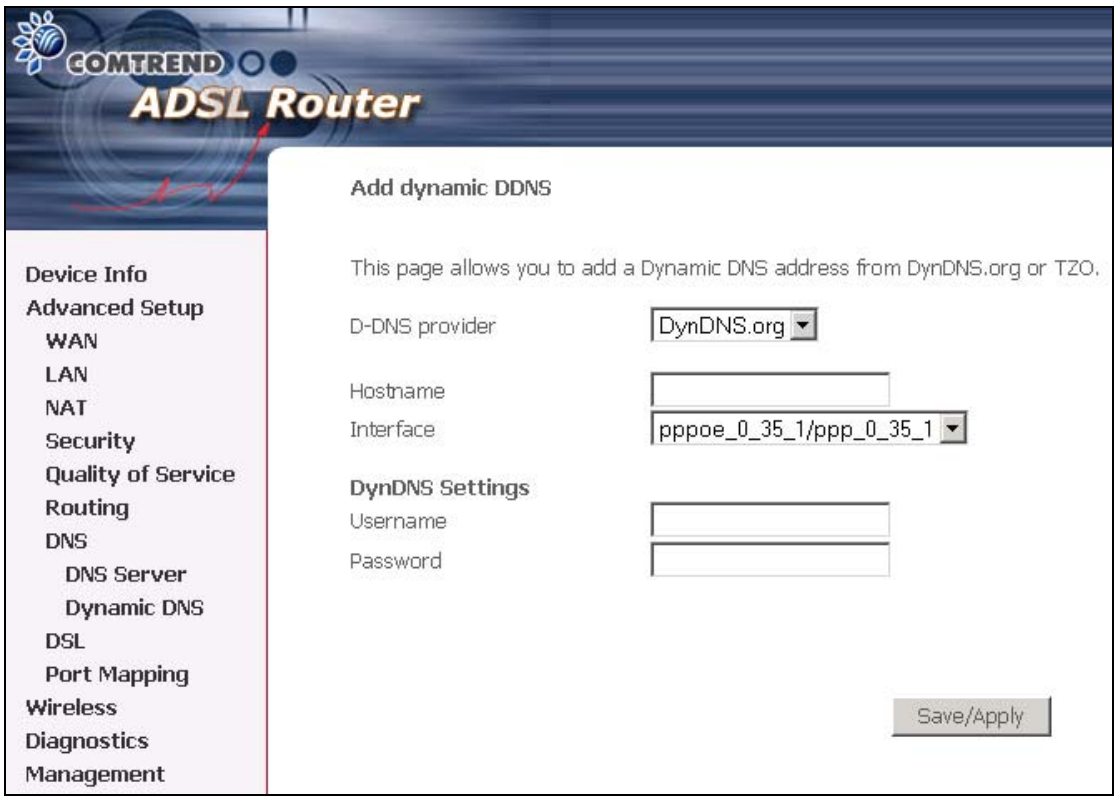

D-DNS provider	Select a dynamic DNS provider from the list
Hostname	Enter the name for the dynamic DNS server.
Interface	Select the interface from the list
Username	Enter the username for the dynamic DNS server.
Password	Enter the password for the dynamic DNS server.

6.8 DSL

To access the DSL settings, First click On **Advanced Setup** and then click on **DSL**. The DSL Settings dialog box allows you to select an appropriate modulation mode.

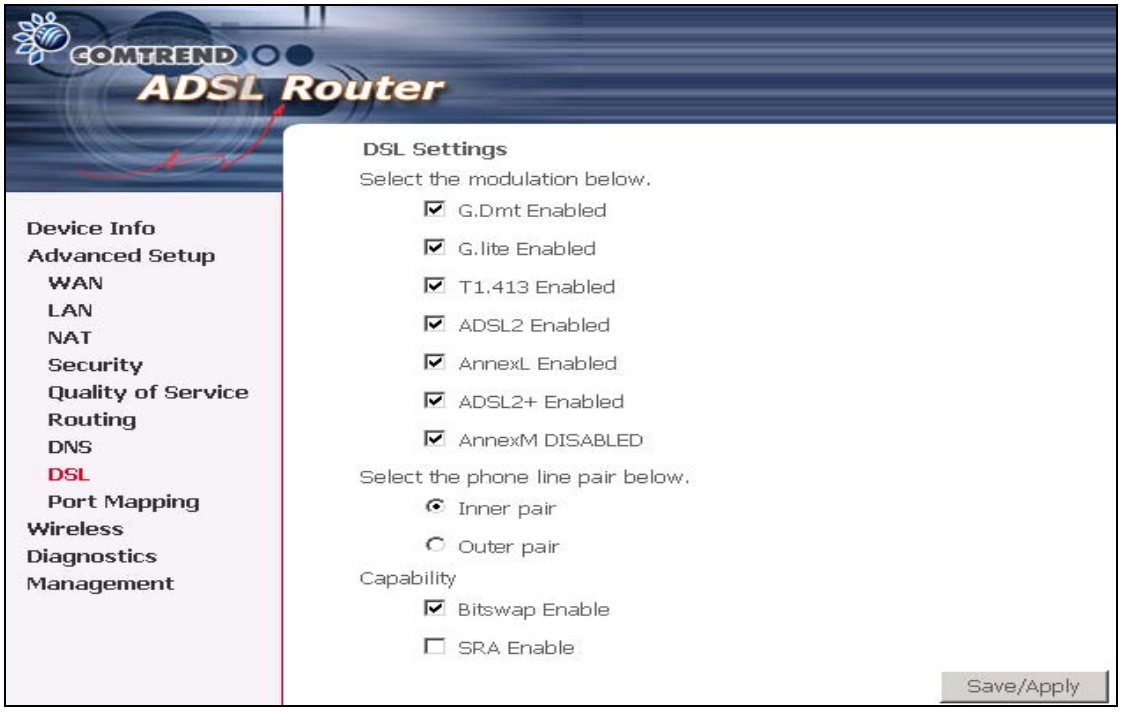

Option	Description
G.dmt Enabled	Sets G.Dmt if you want the system to use G.Dmt mode.
G.Lite Enabled	Sets G.Lite if you want the system to use G.Lite mode.
T1.413 Enabled	Sets the T1.413 if you want the system to use only T1.413 mode.
ADSL2 Enabled	The device can support the functions of the ADSL2.
AnnexL Enabled	The device can support/enhance the long loop test.
ADSL2+ Enabled	The device can support the functions of the ADSL2+.
AnnexM DISABLED	Covers a higher "upstream" data rate version, by making use of some of the downstream channels.
Inner Pair	Reserved only
Outer Pair	Reserved only
Bitswap Enable	Allows bitswaping function
SRA Enable	Allows seamless rate adaptation

6.9 Port Mapping

Port Mapping supports multiple ports to PVC and bridging groups. Each group will perform as an independent network. To support this feature, you must create mapping groups with appropriate LAN and WAN interfaces using the Add button. The Remove button will remove the grouping and add the ungrouped interfaces to the Default group.

As shown below, when you tick the Enable virtual ports on, all of the LAN interfaces will be grouped together as a default.

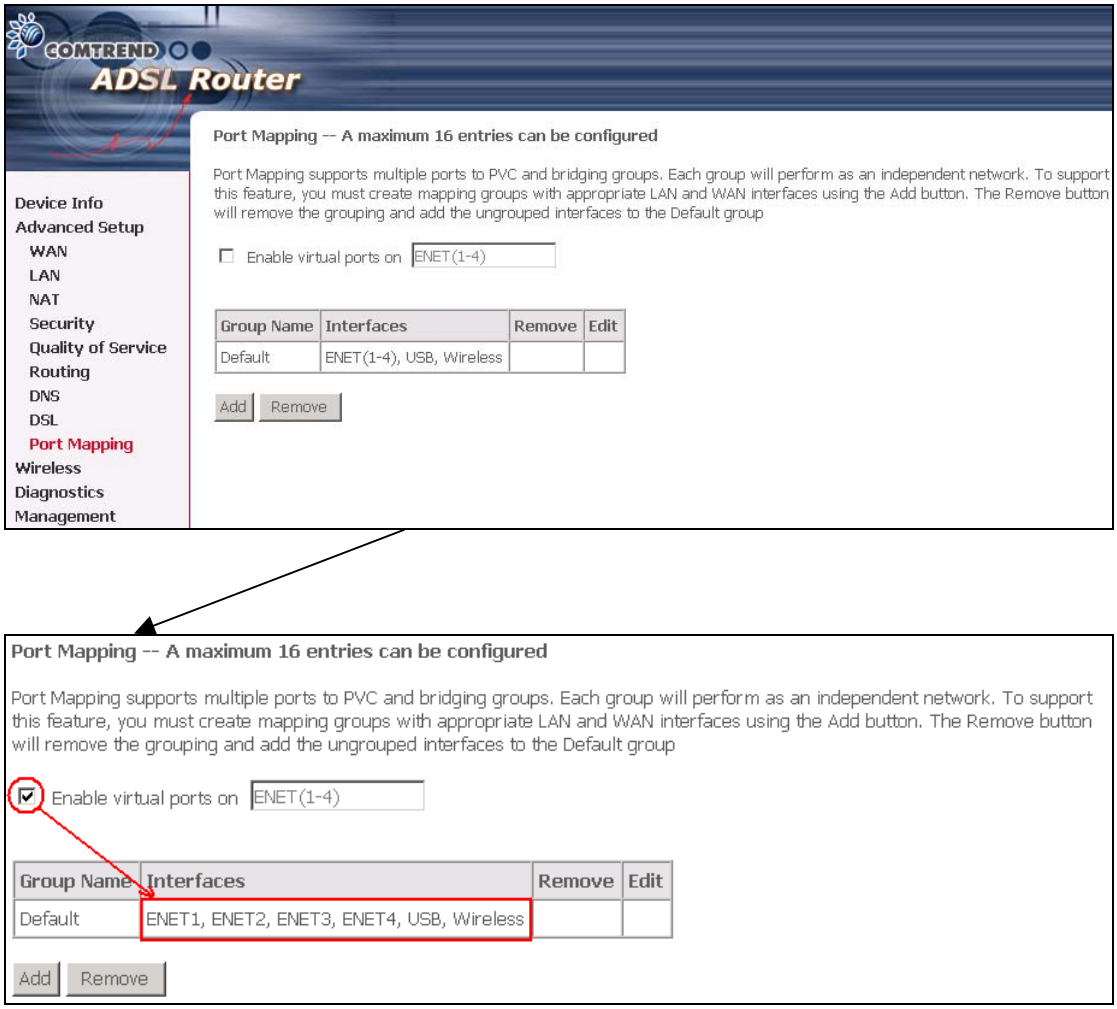
COMTREND
ADSL Router
Device Info
Advanced Setup
WAN
LAN
NAT
Security
Quality of Service
Routing
DNS
DSL
Port Mapping
Wireless
Diagnostics
Management
Port Mapping -- A maximum 16 entries can be configured
Port Mapping supports multiple ports to PVC and bridging groups. Each group will perform as an independent network. To support this feature, you must create mapping groups with appropriate LAN and WAN interfaces using the Add button. The Remove button will remove the grouping and add the ungrouped interfaces to the Default group
Enable virtual ports on
ENET(1-4)
Group Name
Interfaces
Remove
Edit
Default
ENET(1-4), USB, Wireless
Add
Remove
Port Mapping -- A maximum 16 entries can be configured
Port Mapping supports multiple ports to PVC and bridging groups. Each group will perform as an independent network. To support this feature, you must create mapping groups with appropriate LAN and WAN interfaces using the Add button. The Remove button will remove the grouping and add the ungrouped interfaces to the Default group
Enable virtual ports on
ENET(1-4)
Group Name
Interfaces
Remove
Edit
Default
ENET1, ENET2, ENET3, ENET4, USB, Wireless
Add
Remove

To add a port mapping group, simply click the Add button.

Note: This device does not support a USB interface.

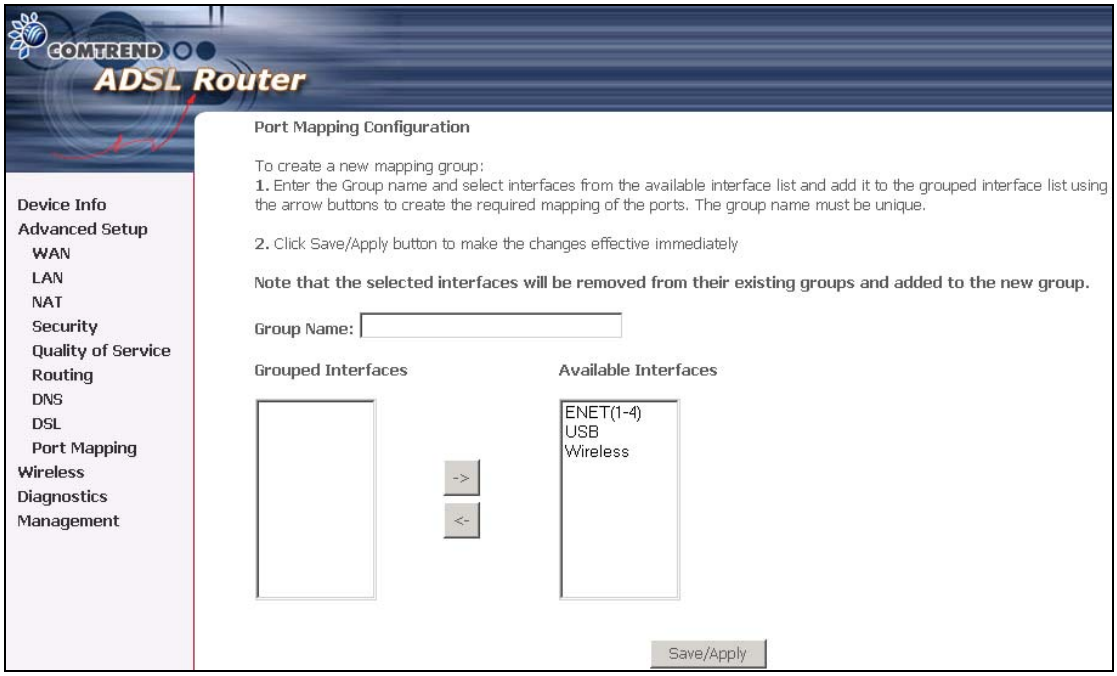

To create a group from the list, first enter the group name and then select from the available interfaces on the list.

Chapter 7 Wireless

The Wireless dialog box allows you to enable the wireless capability, hide the access point, set the wireless network name and restrict the channel set.

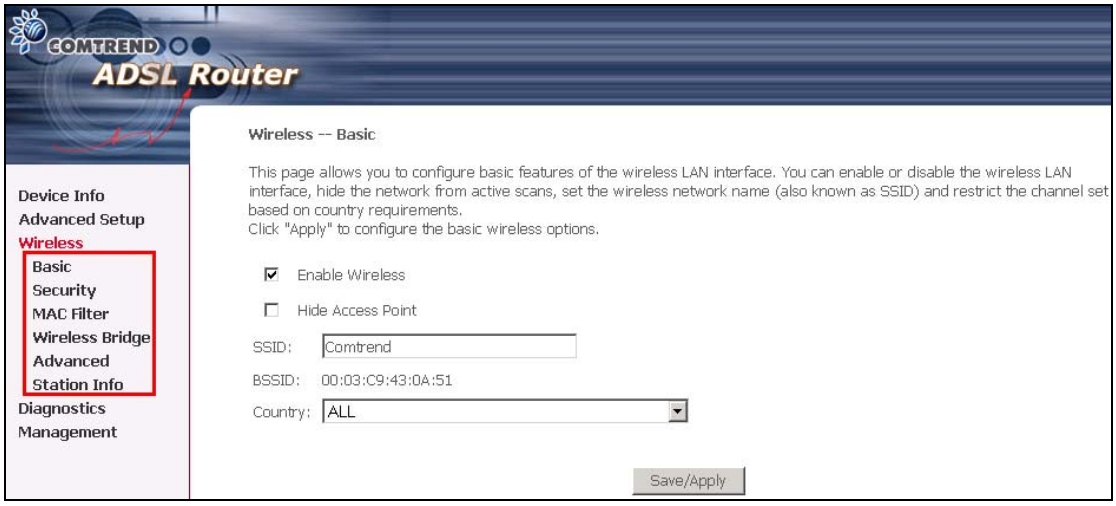
COMTREND
ADSL Router
Wireless -- Basic
This page allows you to configure basic features of the wireless LAN interface. You can enable or disable the wireless LAN interface, hide the network from active scans, set the wireless network name (also known as SSID) and restrict the channel set based on country requirements.
Click "Apply" to configure the basic wireless options.
Enable Wireless
Hide Access Point
SSID: Comtrend
BSSID: 00:03:C9:43:0A:51
Country: ALL
Save/Apply
Device Info
Advanced Setup
Wireless
Basic
Security
MAC Filter
Wireless Bridge
Advanced
Station Info
Diagnostics
Management

7.1 Wireless Basic Screen

The Basic option allows you to configure basic features of the wireless LAN interface. You can enable or disable the wireless LAN interface, hide the network from active scans, set the wireless network name (also known as SSID) and restrict the channel set based on country requirements.

Click **Apply** to configure the basic wireless options.

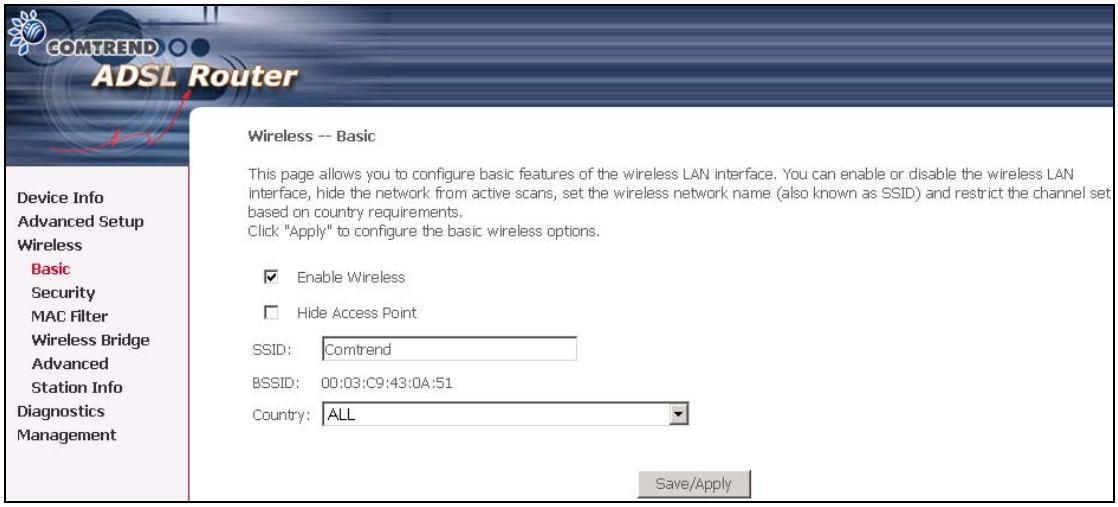
COMTREND
ADSL Router
Wireless -- Basic
This page allows you to configure basic features of the wireless LAN interface. You can enable or disable the wireless LAN interface, hide the network from active scans, set the wireless network name (also known as SSID) and restrict the channel set based on country requirements.
Click "Apply" to configure the basic wireless options.
Enable Wireless
Hide Access Point
SSID: Comtrend
BSSID: 00:03:C9:43:0A:51
Country: ALL
Save/Apply
Device Info
Advanced Setup
Wireless
Basic
Security
MAC Filter
Wireless Bridge
Advanced
Station Info
Diagnostics
Management

Option	Description
Enable Wireless	A checkbox that enables or disables the wireless LAN interface. When selected, the Web UI displays Hide Access point, SSID, and County settings. The default is Enable Wireless.
Hide Access Point	Select Hide Access Point to protect ADSL router access point from detection by wireless active scans. If you do not want the access point to be automatically detected by a wireless station, this checkbox should be de-selected. The station will not discover this access point. To connect a station to the available access points, the station must manually add this access point name in its wireless configuration. In Windows XP, go to the Network>Programs function to view all of the available access points. You can also use other software programs such as NetStumbler to view available access points.
SSID	Sets the wireless network name. SSID stands for Service Set Identifier. All stations must be configured with the correct SSID to access the WLAN. If the SSID does not match, that user will not be granted access. The naming conventions are: Minimum is one character and maximum number of characters: 32 bytes.
BSSID	The BSSID is a 48bit identity used to identify a particular BSS (Basic Service Set) within an area. In Infrastructure BSS networks, the BSSID is the MAC (Medium Access Control) address of the AP (Access Point) and in Independent BSS or ad hoc networks, the BSSID is generated randomly.
Country	A drop-down menu that permits worldwide and specific national settings. Each county listed in the menu enforces specific regulations limiting channel range: 6. US= worldwide 7. Japan=1-14 8. Jordan= 10-13 9. Israel= 1-13

7.1.1 Security

Security options include authentication and encryption services based on the wired equivalent privacy (WEP) algorithm. WEP is a set of security services used to protect 802.11 networks from unauthorized access, such as eavesdropping; in this case, the capture of wireless network traffic. When data encryption is enabled, secret shared encryption keys are generated and used by the source station and the destination station to alter frame bits, thus avoiding disclosure to eavesdroppers.

802.11 supports two subtypes of network authentication services: open system and shared key. Under open system authentication, any wireless station can request authentication. The system that needs to authenticate with another wireless station sends an authentication management frame that contains the identity of the sending station. The receiving station then sends back a frame that indicates whether it recognizes the identity of the sending station.

Under shared key authentication, each wireless station is assumed to have received a secret shared key over a secure channel that is independent from 802.11 wireless network communications channel.

The following screen appears when Security is selected. The Security page allows you to configure security features of the wireless LAN interface. You can set the network authentication method, selecting data encryption, specify whether a network key is required to authenticate to this wireless network and specify the encryption strength.

Click **Apply** to configure the wireless security options.

Option	Description
Network Authentication	It specifies the network authentication. When this checkbox is selected, it specifies that a network key be used for authentication to the wireless network. If the Network Authentication (Shared mode) checkbox is not shared (that is, if open system authentication is used), no authentication is provided. Open system authentication only performs identity verifications. Different authentication type pops up different settings requests. Choosing **802.1X**, enter RADIUS Server IP address, RADIUS Port, and RADIUS key. Also, enable WEP Encryption and the Encryption Strength. 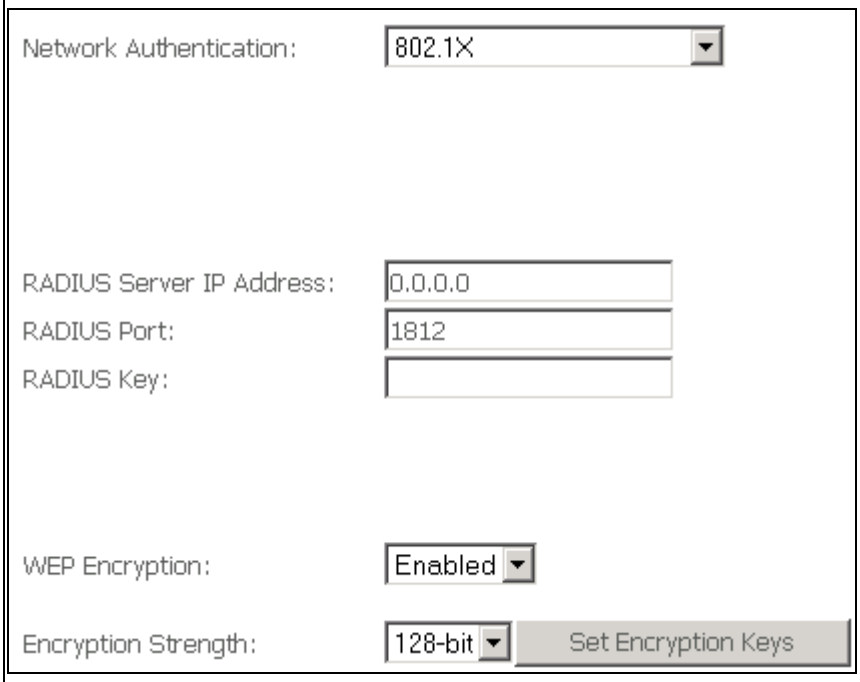 Choosing **WPA**, you must enter WPA Group Rekey Interval.

<table>
<tr><td></td><td> 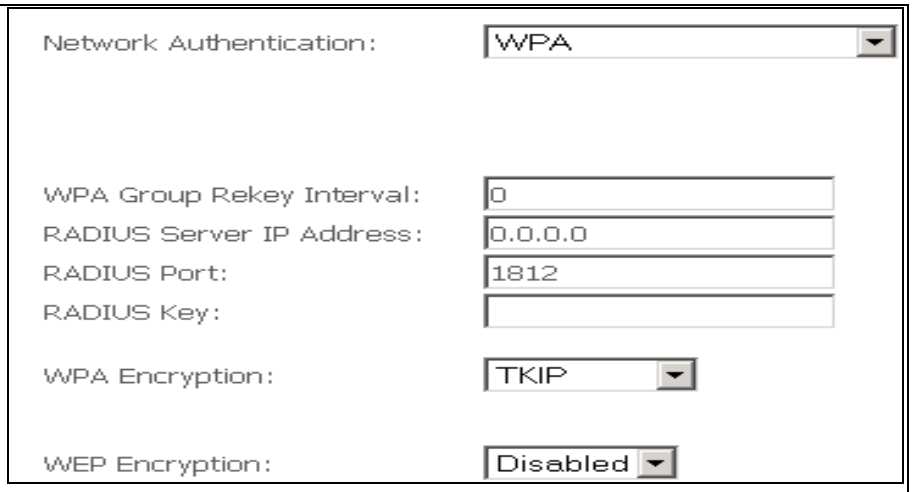

Choosing WPA-PSK, you must enter WPA Pre-Shared Key and Group Rekey Interval.
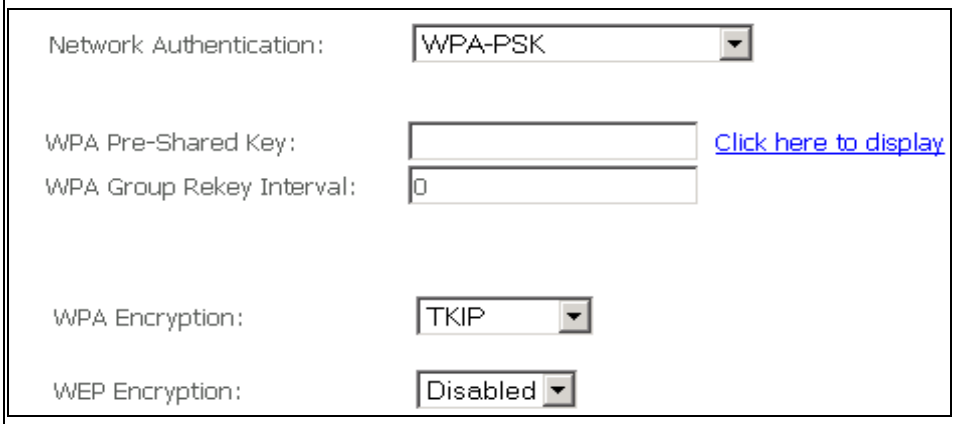
</td></tr>
<tr><td>WEP Encryption</td><td>It specifies that a network key is used to encrypt the data is sent over the network. When this checkbox is selected, it enables data encryption and prompts the Encryption Strength drop-down menu. Data Encryption (WEP Enabled) and Network Authentication use the same key.</td></tr>
<tr><td>Encryption strength</td><td>A session’s key strength is proportional to the number of binary bits comprising the session key file. This means that session keys with a greater number of bits have a greater degree of security, and are considerably more difficult to forcibly decode. This drop-down menu sets either a 64-bit (5-ASCII characters or 10-hexadecimal characters) or 128-bit (13-ASCII characters or 26-hexadecimal characters) key.
If you set a minimum 128-bit key strength, users attempting to establish a secure communications channel with your server must use a browser capable of communicating with a 128-bit session key.
The Encryption Strength settings do not display unless the network Authentication (shared Mode) check box is selected.</td></tr>
</table>

7.1.2 MAC Filter

This MAC Filter page allows access to be restricted/allowed based on a MAC address. All NICs have a unique 48-bit MAC address burned into the ROM chip on the card. When MAC address filtering is enabled, you are restricting the NICs that are allowed to connect to your access point. Therefore, an access point will grant access to any computer that is using a NIC whose MAC address is on its "allows" list.

Wi-Fi routers and access points that support MAC filtering let you specify a list of MAC addresses that may connect to the access point, and thus dictate what devices are authorized to access the wireless network. When a device is using MAC filtering, any address not explicitly defined will be denied access.

MAC Restrict mode: **Off**- disables MAC filtering; **Allow** – permits **access** for the specified MAC address; **deny -** reject access of the specified MAC address, then click the **SET** button.

To delete an entry**,** select the entry at the bottom of the screen and then click the **Remove** button, located on the right hand side of the screen.

To add a MAC entry, click **Add** and enter MAC address

After choosing the Add button, the following screen appears. Enter the MAC address and click **Apply** to add the MAC address to the wireless MAC address filters.

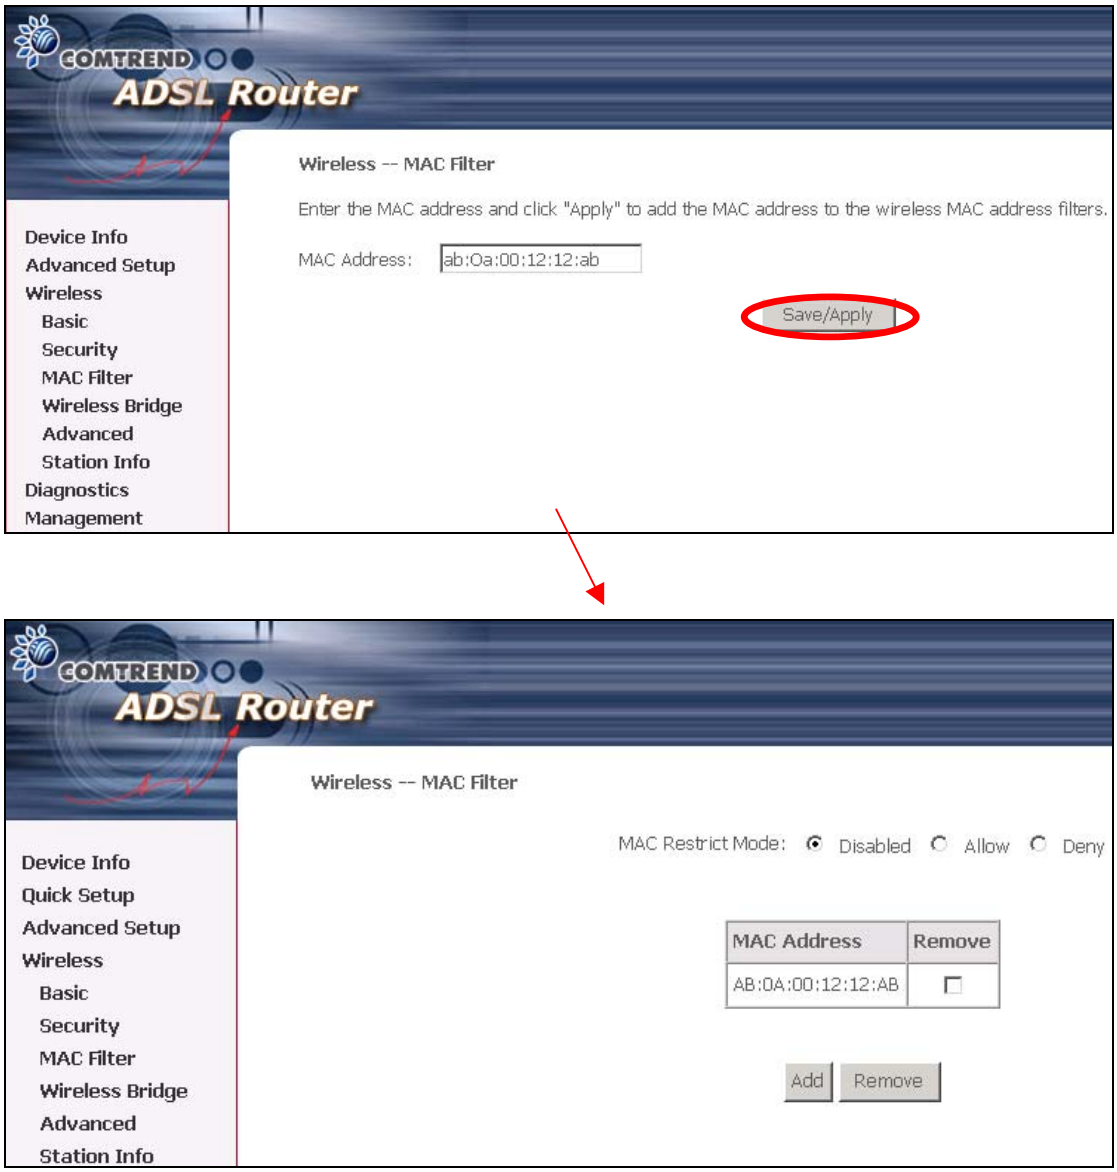

Option	Description
MAC Restrict Mode	Radio buttons that allow settings of; Off: MAC filtering function is disabled. Allow: Permits PCs with listed MAC addresses to connect to the access point. Deny: Prevents PCs with listed MAC from connecting to the access point.

MAC Address	Lists the MAC addresses subject to the Off, Allow, or Deny instruction. The Add button prompts an entry field that requires you type in a MAC address in a two-character, 6-byte convention: xx:xx:xx:xx:xx:xx where xx are hexadecimal numbers. The maximum number of MAC addresses that can be added is 60.

7.1.3 Wireless Bridge

This page allows you to configure wireless bridge features of the wireless LAN interface. You can select Wireless Bridge (also known as Wireless Distribution System) to disable access point functionality. Selecting Access Point enables access point functionality. Wireless bridge functionality will still be available and wireless stations will be able to associate to the AP. Select Disabled in Bridge Restrict, which disables wireless bridge restriction. Any wireless bridge will be granted access. Selecting Enabled or Enabled (Scan) enables wireless bridge restriction. Only those bridges selected in Remote Bridges will be granted access.

COMTREND
ADSL Router
Device Info
Advanced Setup
Wireless
Basic
Security
MAC Filter
Wireless Bridge
Advanced
Station Info
Diagnostics
Management
Wireless -- Bridge
This page allows you to configure wireless bridge features of the wireless LAN interface. You can select Wireless Bridge (also known as Wireless Distribution System) to disables access point functionality. Selecting Acess Point enables access point functionality. Wireless bridge functionality will still be available and wireless stations will be able to associate to the AP. Select Disabled in Bridge Restrict which disables wireless bridge restriction. Any wireless bridge will be granted access. Selecting Enabled or Enabled(Scan) enables wireless bridge restriction. Only those bridges selected in Remote Bridges will be granted access.
Click "Refresh" to update the remote bridges. Wait for few seconds to update.
Click "Save/Apply" to configure the wireless bridge options.
AP Mode:
Access Point
Bridge Restrict:
Disabled
Refresh
Save/Apply

Option	Description
AP Mode	Access Point Wireless Bridge
Bridge Restrict	Enabled Enabled (Scan) Disabled

7.1.4 Advanced

The Advanced page allows you to configure advanced features of the wireless LAN interface. You can select a particular channel on which to operate, force the transmission rate to a particular speed, set the fragmentation threshold, set the RTS threshold, set the wakeup interval for clients in power-save mode, set the beacon interval for the access point, set XPress mode and set whether short or long preambles are used.

Click **Apply** to configure the advanced wireless options.

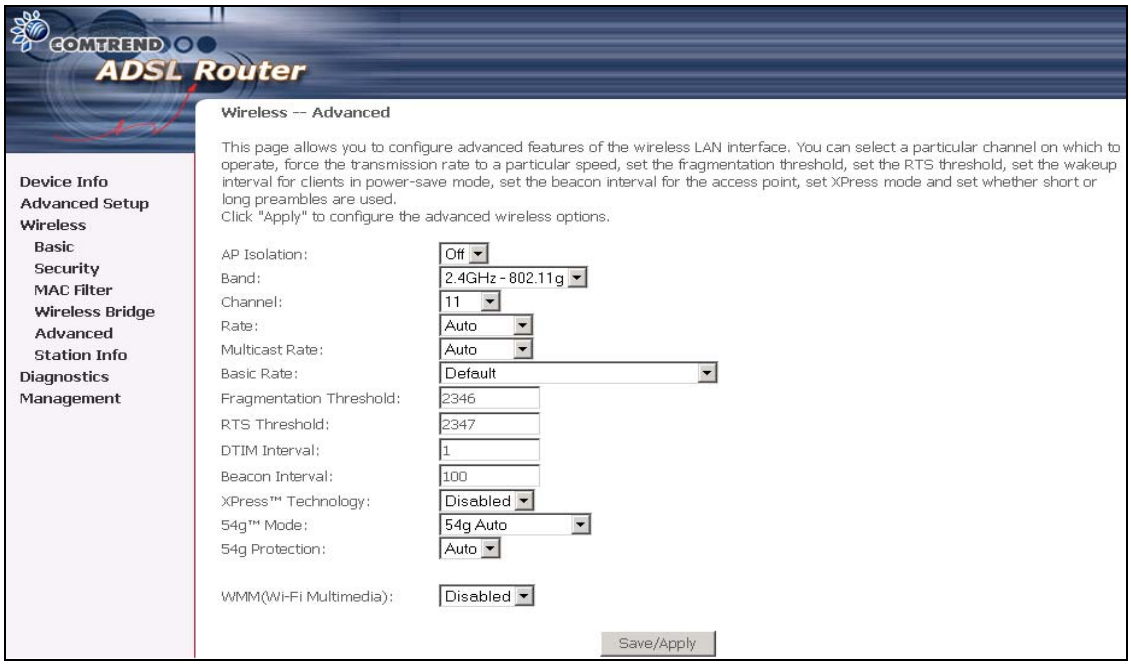
COMTREND
ADSL Router
Wireless -- Advanced
This page allows you to configure advanced features of the wireless LAN interface. You can select a particular channel on which to operate, force the transmission rate to a particular speed, set the fragmentation threshold, set the RTS threshold, set the wakeup interval for clients in power-save mode, set the beacon interval for the access point, set XPress mode and set whether short or long preambles are used.
Click "Apply" to configure the advanced wireless options.
Device Info
Advanced Setup
Wireless
Basic
Security
MAC Filter
Wireless Bridge
Advanced
Station Info
Diagnostics
Management
AP Isolation: Off
Band: 2.4GHz - 802.11g
Channel: 11
Rate: Auto
Multicast Rate: Auto
Basic Rate: Default
Fragmentation Threshold: 2346
RTS Threshold: 2347
DTIM Interval: 1
Beacon Interval: 100
XPress™ Technology: Disabled
54g™ Mode: 54g Auto
54g Protection: Auto
WMM(Wi-Fi Multimedia): Disabled
Save/Apply

Option	Description
AP Isolation	Select On or Off. By enabling this feature, wireless clients associated with the Access Point will be able to connect to each other.
Band	The new amendment allows IEEE 802.11g units to fall back to speeds of 11 Mbps, so IEEE 802.11b and IEEE 802.11g devices can coexist in the same network. The two standards apply to the 2.4 GHz frequency band. IEEE 802.11g creates data-rate parity at 2.4 GHz with the IEEE 802.11a standard, which has a 54 Mbps rate at 5 GHz. (IEEE 802.11a has other differences compared to IEEE 802.11b or g, such as offering more channels.)

Channel	Drop-down menu that allows selection of specific channel
Rate	Drop-down menu that specifies the following fixed rates: Auto: Default. Uses the 11 Mbps data rate when possible but drops to lower rates when necessary. 1 Mbps, 2Mbps, 5.5Mbps, or 11Mbps fixed rates. The appropriate setting is dependent on signal strength.
Multicast Rate	Setting multicast packet transmit rate
Basic Rate	Setting basic transmit rate
Fragmentation Threshold	A threshold, specified in bytes, that determines whether packets will be fragmented and at what size. On an 802.11 WLAN, packets that exceed the fragmentation threshold are fragmented, i.e., split into, smaller units suitable for the circuit size. Packets smaller than the specified fragmentation threshold value are not fragmented. Enter a value between 256 and 2346. If you experience a high packet error rate, try to slightly increase your Fragmentation Threshold. The value should remain at its default setting of 2346. Setting the Fragmentation Threshold too low may result in poor performance.
RTS Threshold	Request to Send, when set in bytes, specifies the packet size beyond which the WLAN Card invokes its RTS/CTS mechanism. Packets that exceed the specified RTS threshold trigger the RTS/CTS mechanism. The NIC transmits smaller packet without using RTS/CTS. The default setting of 2347 (maximum length) disables RTS Threshold.
DTIM Interval	Delivery Traffic Indication Message (DTIM), also known as Beacon Rate. The entry range is a value between 1 and 65535. A DTIM is a countdown informing clients of the next window for listening to broadcast and multicast messages. When the AP has buffered broadcast or multicast messages for associated clients, it sends the next DTIM with a DTIM Interval value. AP Clients hear the beacons and awaken to receive the broadcast and multicast messages. The default is 1.

Beacon Interval	The amount of time between beacon transmissions. Each beacon transmission identifies the presence of an access point. By default, radio NICs passively scan all RF channels and listen for beacons coming from access points to find a suitable access point. Before a station enters power save mode, the station needs the beacon interval to know when to wake up to receive the beacon (and learn whether there are buffered frames at the access point). The entered value is represented in ms. Default is 100. Acceptable entry range is 1 to 0xffff (65535)
Xpress ™ Technology	Xpress Technology is compliant with draft specifications of two planned wireless industry standards.
Wireless Media Extension	Provides an interim QoS solution for 802.11 networks until the release of 802.11e. WRAP (Wireless Robust Authenticated Protocol) An encryption protocol in the 802.11i standard. WRAP is based upon the Offset Codebook (OCB) mode of AES. WRAP is being replaced with CCMP.
54g ™ Mode	Select the mode to 54g Auto for the widest compatibility. Select the mode to 54g Performance for the fastest performance among 54g certified equipment. Set the mode to 54g LRS if you are experiencing difficulty with legacy 802.11b equipment.
54g Protection	In Auto mode the router will use RTS/CTS to improve 802.11g performance in mixed 802.11g/802.11b networks. Turn protection off to maximize 802.11g throughput under most conditions.
WMM (Wi-Fi Multimedia)	This is a standard that is meant to improve audio, video and voice applications transmitted over a wireless network.

7.1.5 Station Info

This page shows authenticated wireless stations and their status.

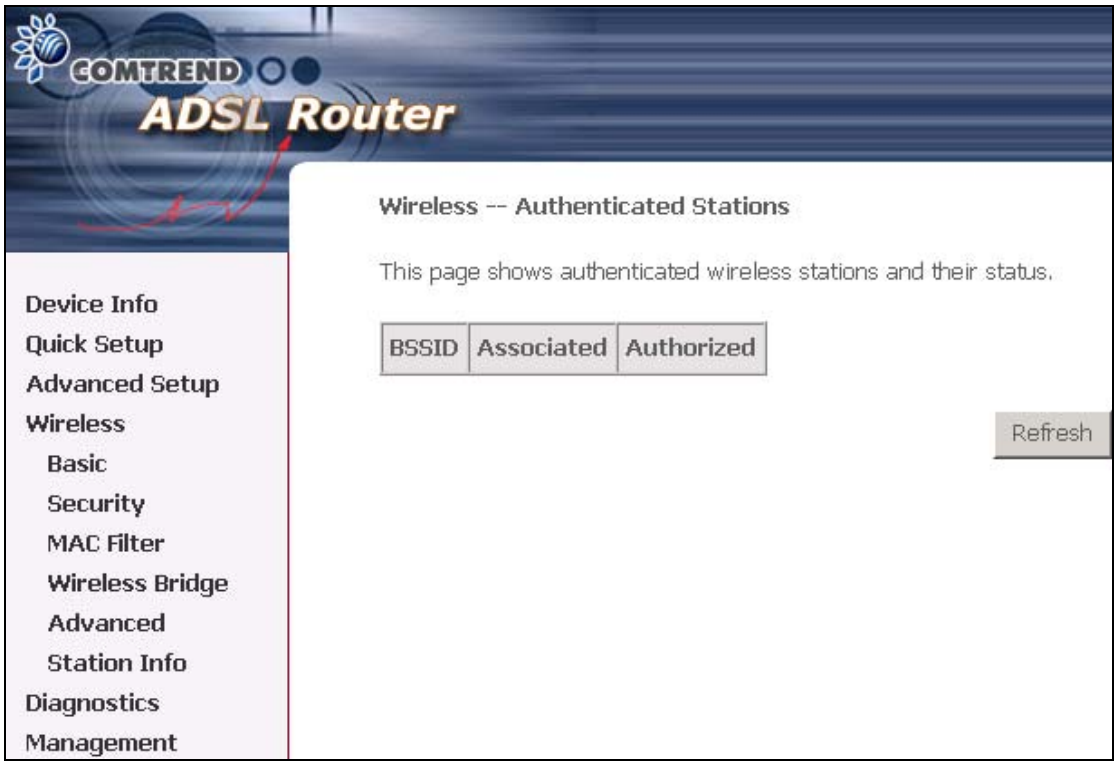

BSSID	The BSSID is a 48bit identity used to identify a particular BSS (Basic Service Set) within an area. In Infrastructure BSS networks, the BSSID is the MAC (Medium Access Control) address of the AP (Access Point) and in Independent BSS or ad hoc networks, the BSSID is generated randomly.
Associated	Lists all the stations that are associated with the Access Point, along with the amount of time since packets were transferred to and from each station. If a station is idle for too long, it is removed from this list.
Authorized	Lists those devices with authorized access.

Chapter 8 Diagnostics

The Diagnostics menu provides feedback on the connection status of the CT-5361 and the ADSL link. The individual tests are listed below. If a test displays a fail status, click **Rerun Diagnostic Tests** at the bottom of this page to make sure the fail status is consistent. If the test continues to fail, click **Help** and follow the troubleshooting procedures.

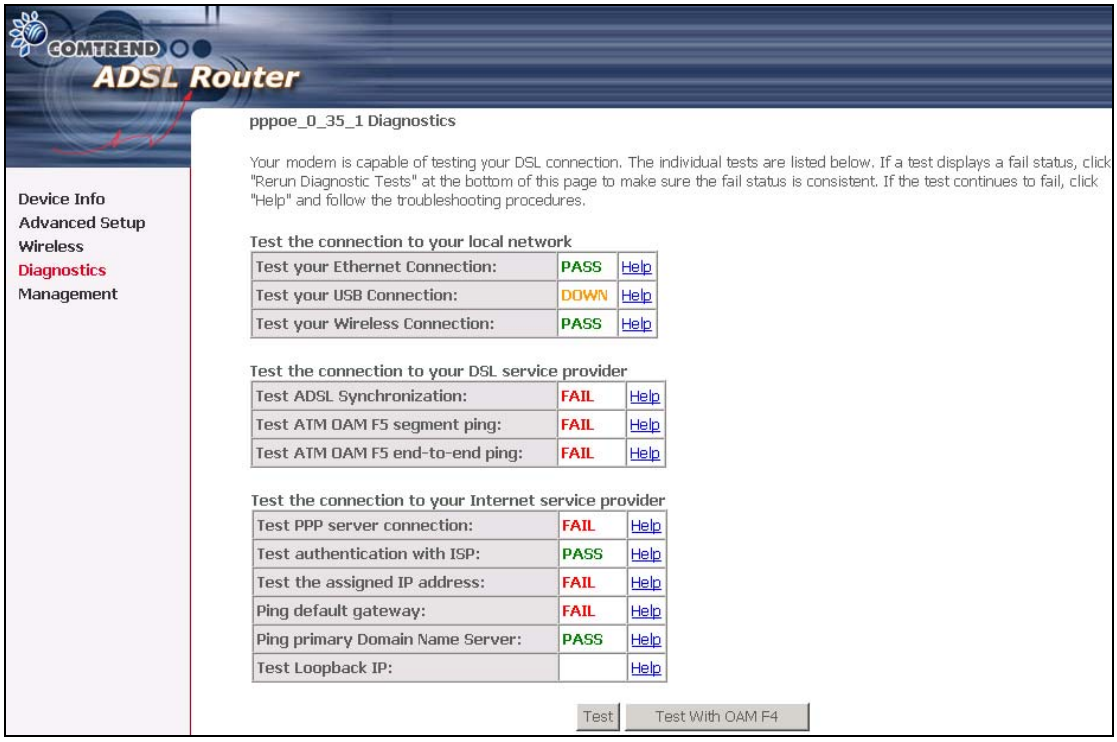
COMTREND
ADSL Router
Device Info
Advanced Setup
Wireless
Diagnostics
Management
pppoe_0_35_1 Diagnostics
Your modem is capable of testing your DSL connection. The individual tests are listed below. If a test displays a fail status, click "Rerun Diagnostic Tests" at the bottom of this page to make sure the fail status is consistent. If the test continues to fail, click "Help" and follow the troubleshooting procedures.
Test the connection to your local network
Test your Ethernet Connection: PASS Help
Test your USB Connection: DOWN Help
Test your Wireless Connection: PASS Help
Test the connection to your DSL service provider
Test ADSL Synchronization: FAIL Help
Test ATM OAM F5 segment ping: FAIL Help
Test ATM OAM F5 end-to-end ping: FAIL Help
Test the connection to your Internet service provider
Test PPP server connection: FAIL Help
Test authentication with ISP: PASS Help
Test the assigned IP address: FAIL Help
Ping default gateway: FAIL Help
Ping primary Domain Name Server: PASS Help
Test Loopback IP: Help
Test
Test With OAM F4

Note: This device does not support a USB interface.

Test	Description
Ethernet Connection	**Pass:** indicates that the Ethernet interface from your computer is connected to the LAN port of your DSL Router. A flashing or solid green LAN LED on the router also signifies that an Ethernet connection is present and that this test is successful. **Fail:** Indicates that the DSL Router does not detect the Ethernet interface on your computer.

Wireless connection	**Pass:** Indicates that the Wireless interface from your computer is connected to the wireless network. **Down:** Indicates that the DSL Router does not detect the wireless network.
ADSL Synchronization	**Pass:** Indicates that the DSL modem has detected a DSL signal from the telephone company. A solid WAN LED on the router also indicates the detection of a DSL signal from the telephone company. **Fail:** indicates that the DSL modem does not detect a signal from the telephone company's DSL network. The WAN LED will stop blinking and the LED will stop illuminating (i.e. go blank).
ISP Connection	**Pass:** Indicates we can access the WAN service like the Gateway and DNS. **Fail:** Indicates we cannot access the WAN side.

Chapter 9 Management

The Management section of the CT-5361 supports the following maintenance functions and processes:

- Settings
- System log
- SNMP Agent
- Internet Time
- Access Control
- Update software
- Save/Reboot

9.1 Settings

The Settings option allows you to back up your settings to a file, retrieve the setting file, and restore the settings.

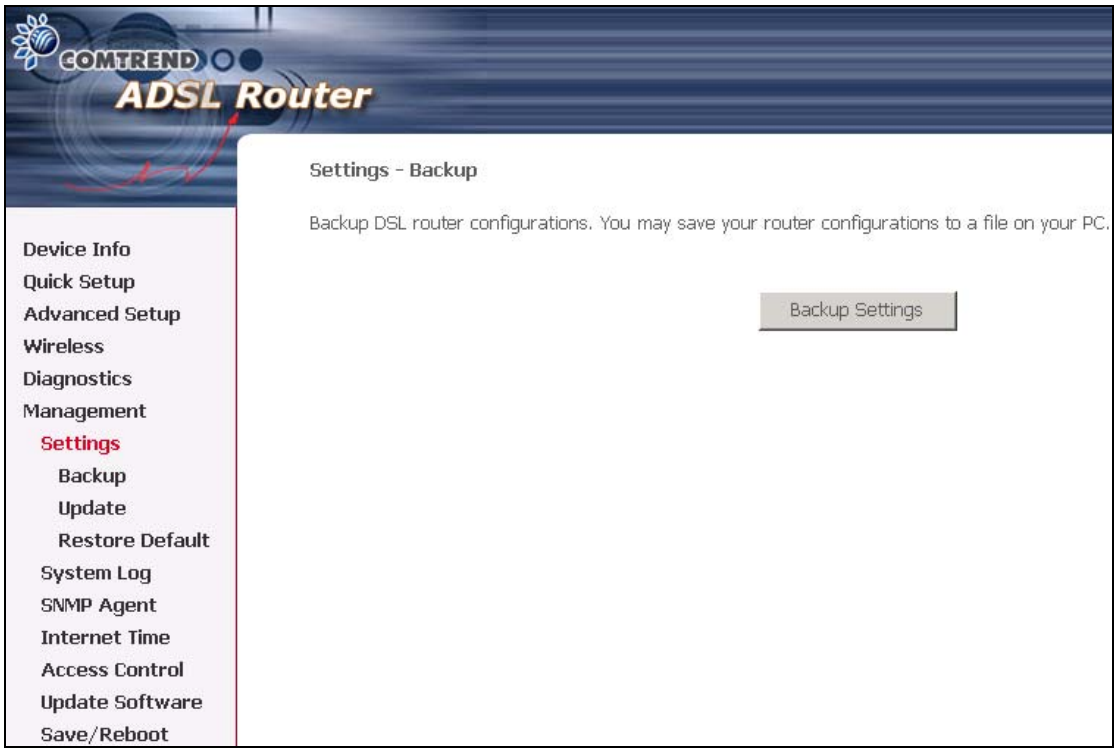

9.1.1 Configuration Backup

The Backup option under Management>Settings save your router configurations to a file on your PC. Click BACKUP Settings in the main window. You will be prompted to define the location of the backup file to save. After choosing the file location, click **Backup Settings.** Te file will then be saved to the assigned location.

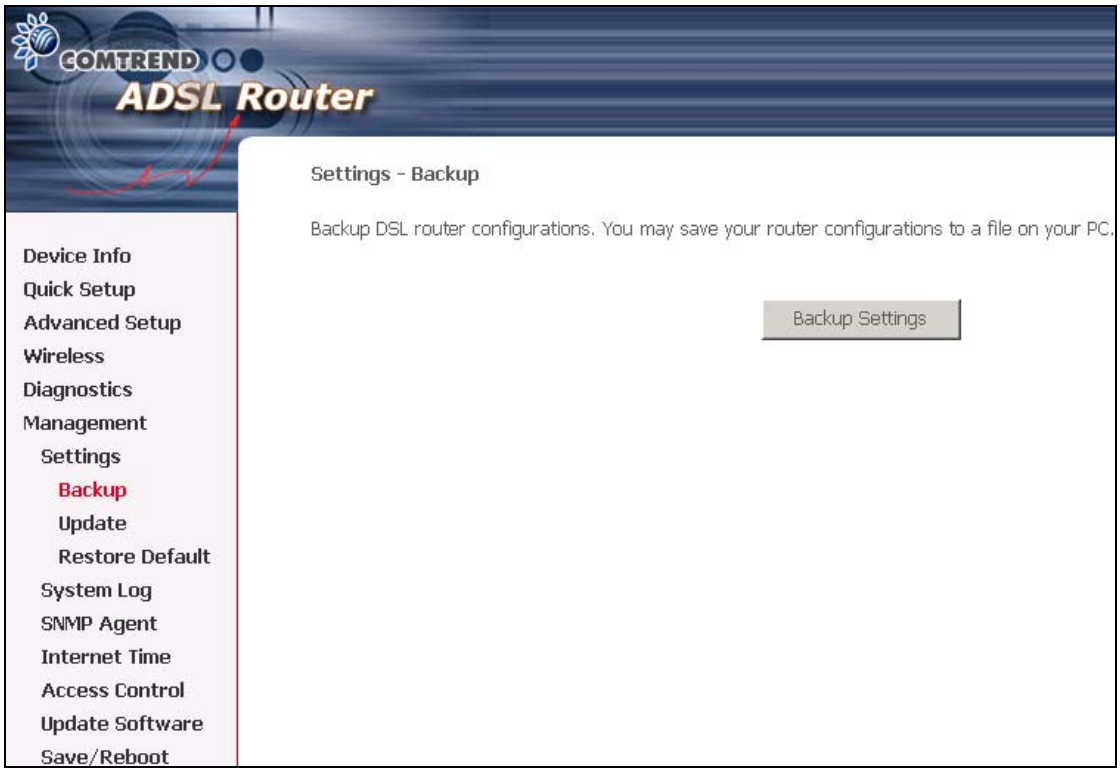

9.1.2 Tools – Update Settings

The Update option under Management>Settings update your router settings using your saved files.

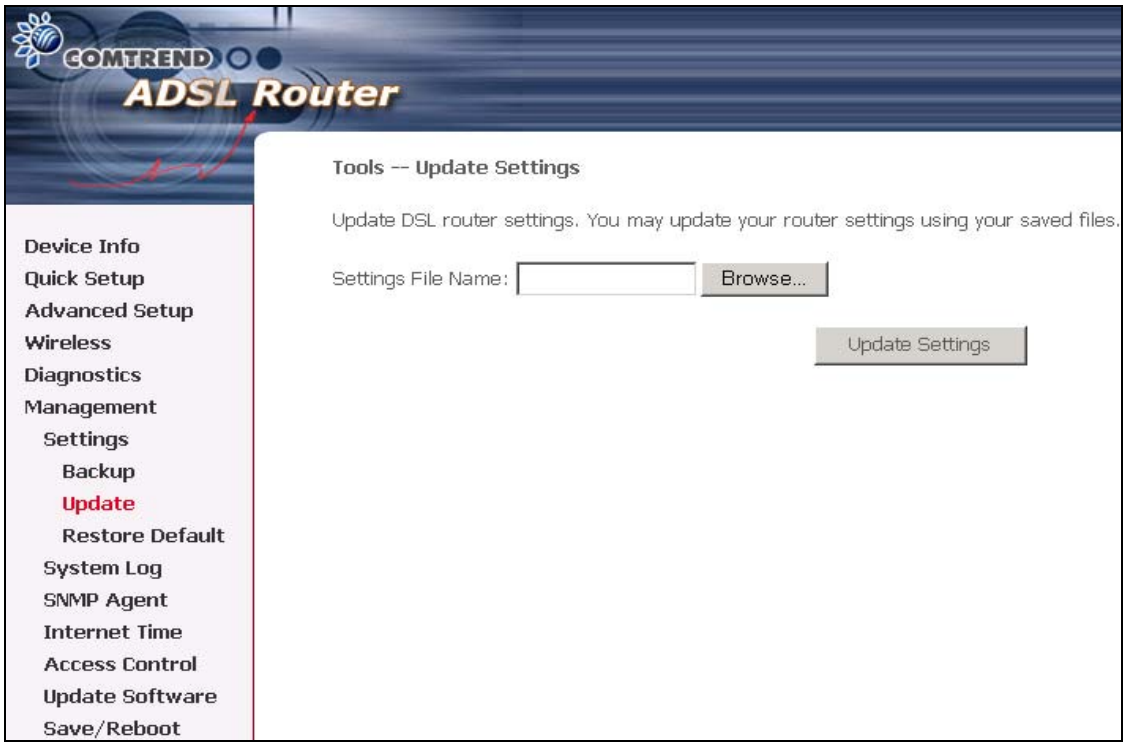

9.1.3 Restore Default

Clicking the Restore Default Configuration option in the Restore Settings screen can restore the original factory installed settings.

NOTE: This entry has the same effect as the hardware reset-to-default button. The CT-5361 board hardware and the boot loader support the **reset to default** button. If the reset button is continuously pushed for more than 5 seconds, the boot loader will erase the entire configuration data saved on the flash memory.

NOTE: Restoring system settings requires a system reboot. This necessitates that the current Web UI session be closed and restarted. Before restarting the connected PC must be configured with a static IP address in the 192.168.1.x subnet in order to configure the CT-5361.

Default settings

The CT-5361 default settings are

- LAN port IP= 192.168.1.1, subnet mask = 255.255.255.0
- Local user name: root
- Password: 12345
- Remote user name: support
- Remote user password: support

After the Restore Default Configuration button is selected, the following screen appears. Close the DSL Router Configuration window and wait for 2 minutes before reopening your web browser. If necessary, reconfigure your PC's IP address to match your new configuration.

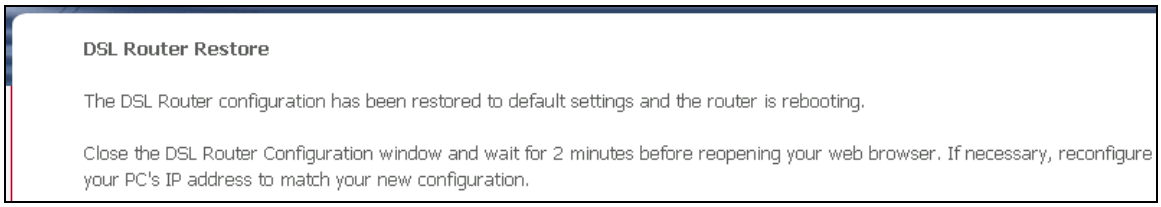
DSL Router Restore
The DSL Router configuration has been restored to default settings and the router is rebooting.
Close the DSL Router Configuration window and wait for 2 minutes before reopening your web browser. If necessary, reconfigure your PC's IP address to match your new configuration.

9.2 System Log

The System Log option under Management>Settings allows you to view the system events log, or to configure the System Log options. The default setting of system log is disabled. Follow the steps below to enable and view the system log.

1. Click **Configure System Log** to display the following screen.

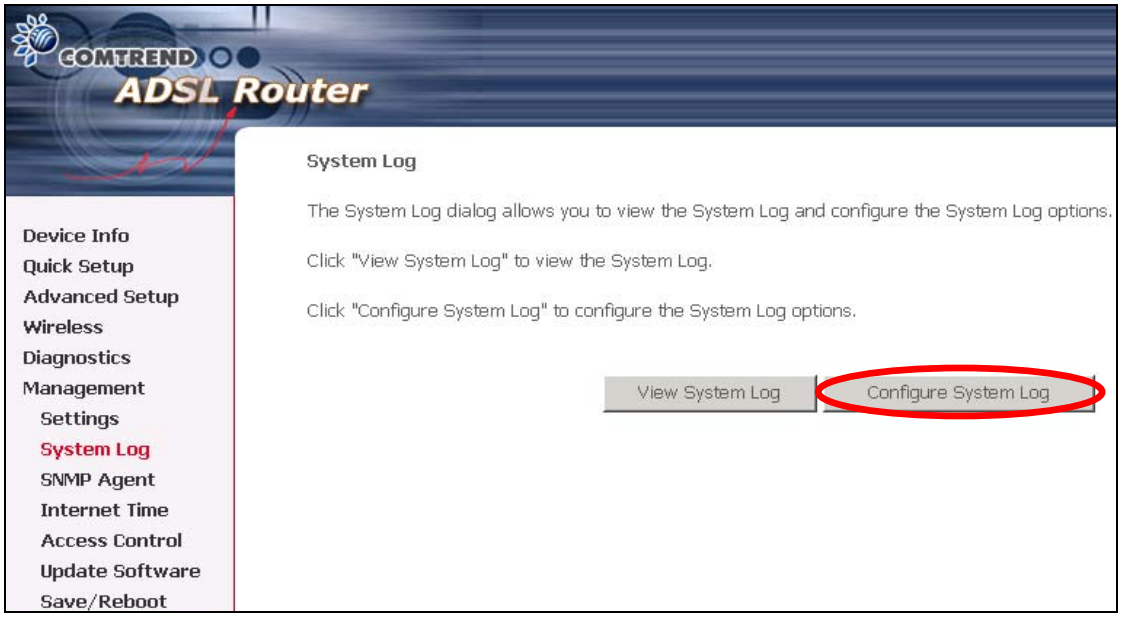

2. Select from the desired Log options described in the following table, and then click **SAVE/Apply**.

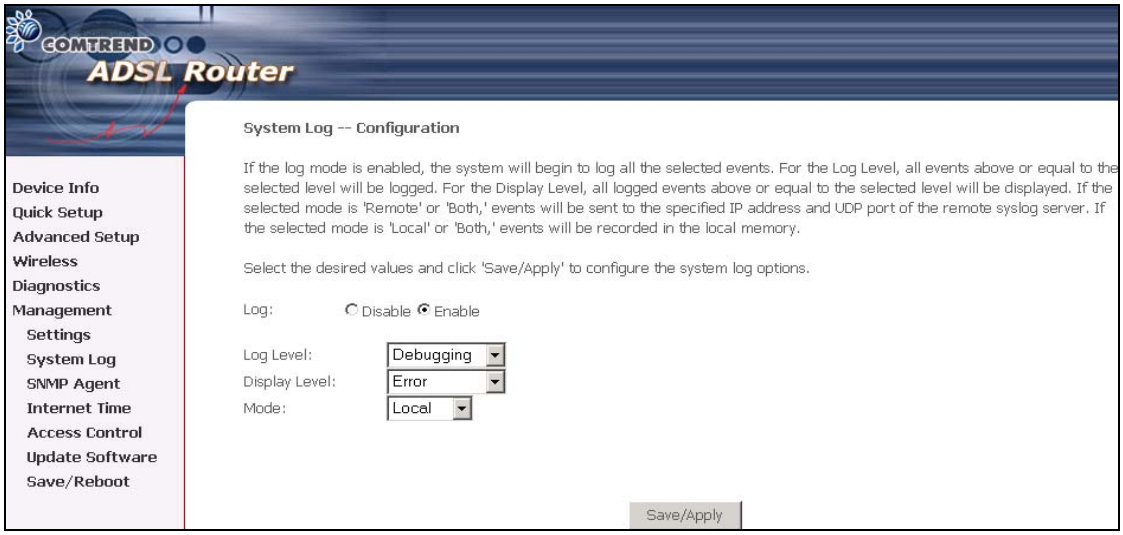
COMTREND
ADSL Router
Device Info
Quick Setup
Advanced Setup
Wireless
Diagnostics
Management
Settings
System Log
SNMP Agent
Internet Time
Access Control
Update Software
Save/Reboot
System Log -- Configuration
If the log mode is enabled, the system will begin to log all the selected events. For the Log Level, all events above or equal to the selected level will be logged. For the Display Level, all logged events above or equal to the selected level will be displayed. If the selected mode is 'Remote' or 'Both,' events will be sent to the specified IP address and UDP port of the remote syslog server. If the selected mode is 'Local' or 'Both,' events will be recorded in the local memory.
Select the desired values and click 'Save/Apply' to configure the system log options.
Log: Disable Enable
Log Level: Debugging
Display Level: Error
Mode: Local
Save/Apply

Option	Description
Log	Indicates whether the system is currently recording events. The user can enable or disable event logging. By default, it is disabled. To enable it, tick Enable and then Apply button.
Log level	Allows you to configure the event level and filter out unwanted events below this level. The events ranging from the highest critical level "Emergency" down to this configured level will be recorded to the log buffer on the CT-5361 SDRAM. When the log buffer is full, the newer event will wrap up to the top of the log buffer and overwrite the old event. By default, the log level is "Debugging," which is the lowest critical level. The following log levels are • Emergency = system is unusable • Alert = action must be taken immediately • Critical = critical conditions • Error = Error conditions • Warning = normal but significant condition • Notice= normal but insignificant condition • Informational= provides information for reference • Debugging = debug-level messages Emergency is the most serious event level, whereas Debugging is the least important. For instance, if the log level is set to Debugging, all the events from the lowest Debugging level to the most critical level Emergency level will be recorded. If the log level is set to Error, only Error and the level above will be logged.
Display Level	Allows the user to select the logged events and displays on the **View System Log** page for events of this level and above to the highest Emergency level.
Mode	Allows you to specify whether events should be stored in the local memory, or be sent to a remote system log server, or both simultaneously. If remote mode is selected, view system log will not be able to display events saved in the remote system log server. When either Remote mode or Both mode is configured, the WEB UI will prompt the user to enter the Server IP address and Server UDP port.

3. Click **View System Log**. The results are displayed as follows.

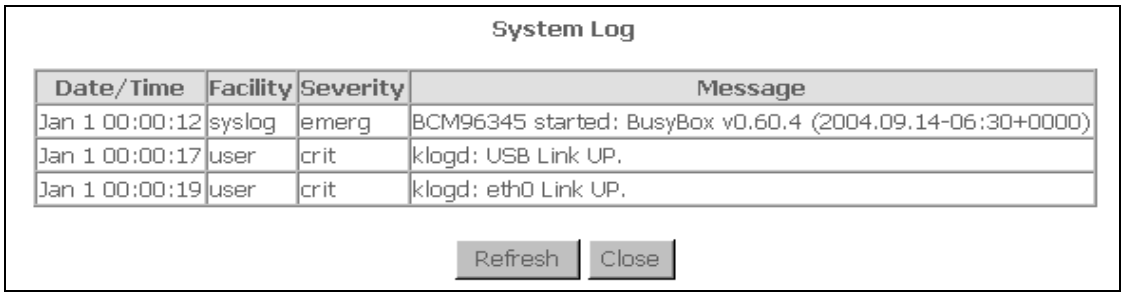

9.3 SNMP Agent

Simple Network Management Protocol (SNMP) allows a management application to retrieve statistics and status from the SNMP agent in this device.

The System Log option under Management>Settings allows you to view the system events log, or to configure the System Log options.
Select or enter the desired values and click **Save/Apply** to configure the SNMP options.

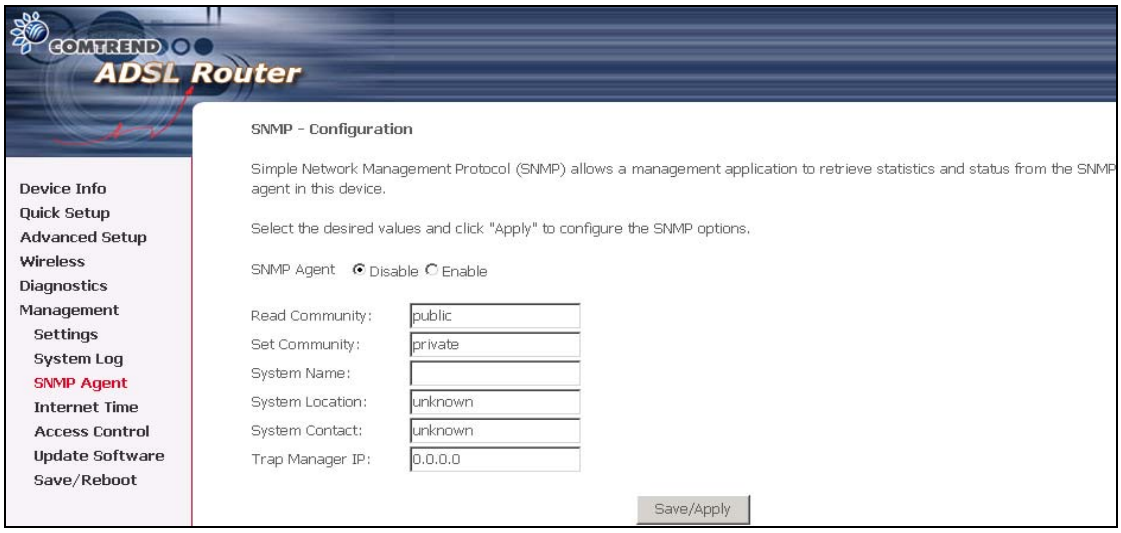

9.4 Internet Time

The Internet Time option under Management menu bar configures the Modem's time. To automatically synchronize with Internet time servers, tick the corresponding box displayed on the screen. Then click **Save/Apply**.

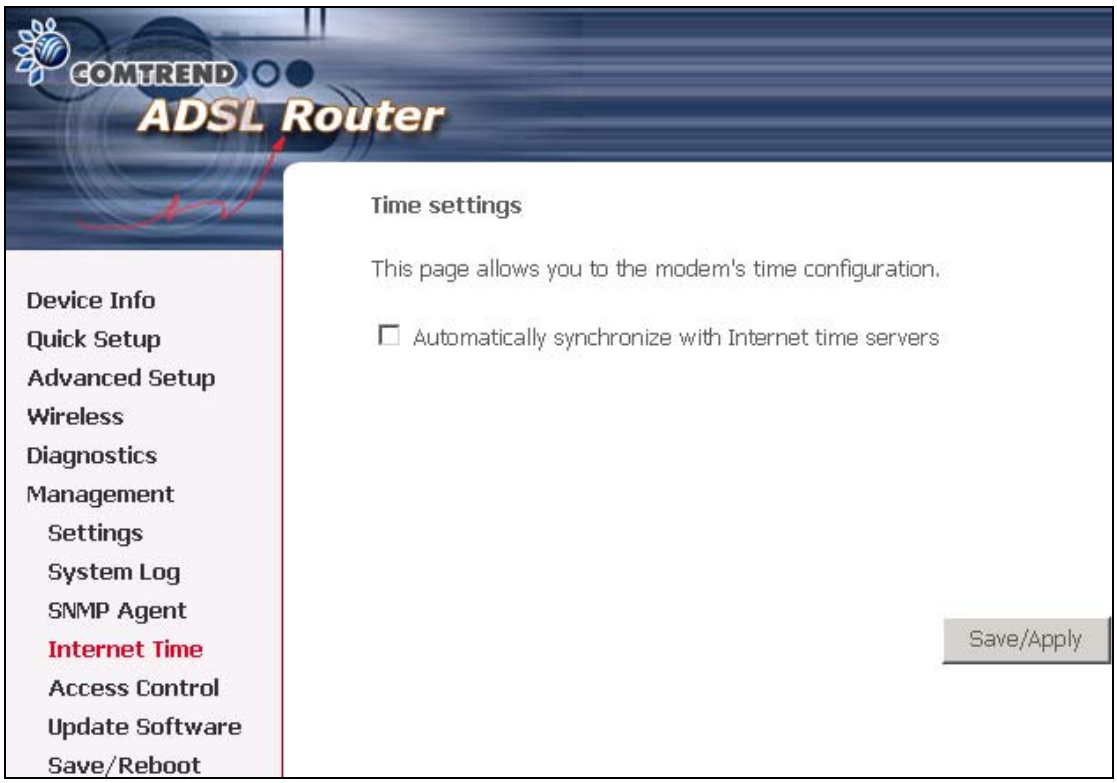

9.5 Access Control

The Access Control option under Management menu bar configures the access-related parameters, including three parts: Services, IP Address, and Passwords.

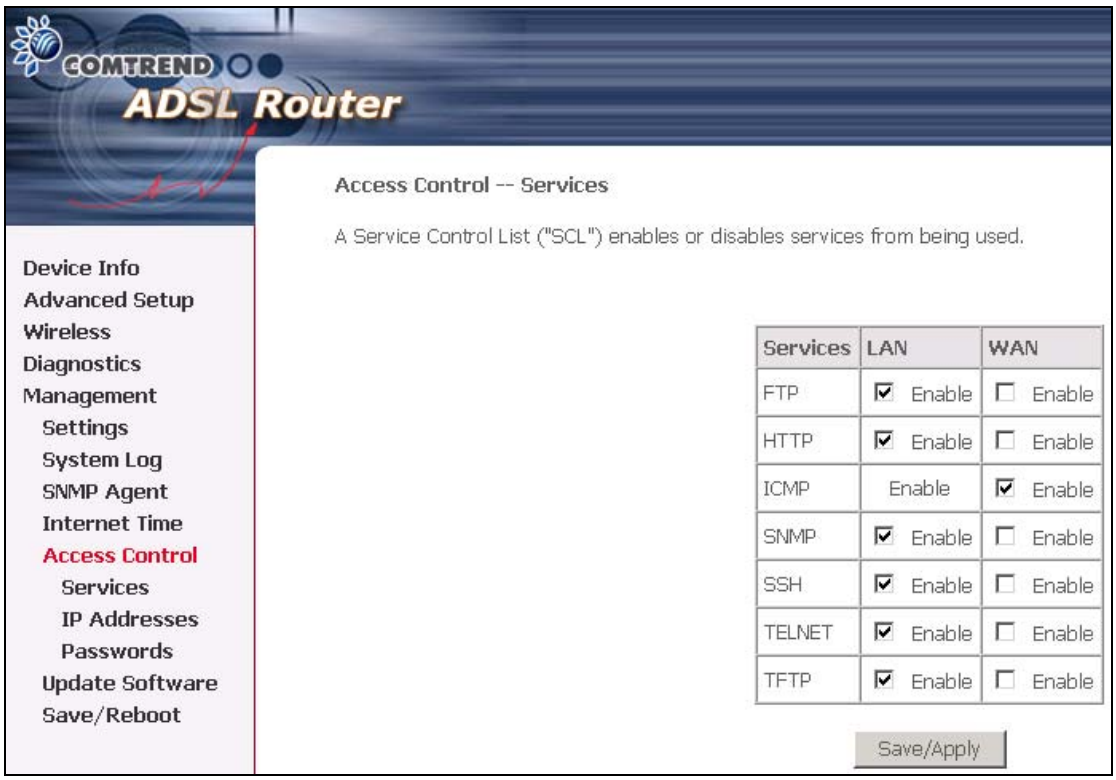

9.5.1 Services

The Services option limits or opens the access services over the LAN or WAN. These services are provided FTP, HTTP, ICMP, SNMP, SSH (Security Socket Share), TELNET, and TFTP. Enable the service by checking the item in the corresponding checkbox, and then click **Save/Apply**.

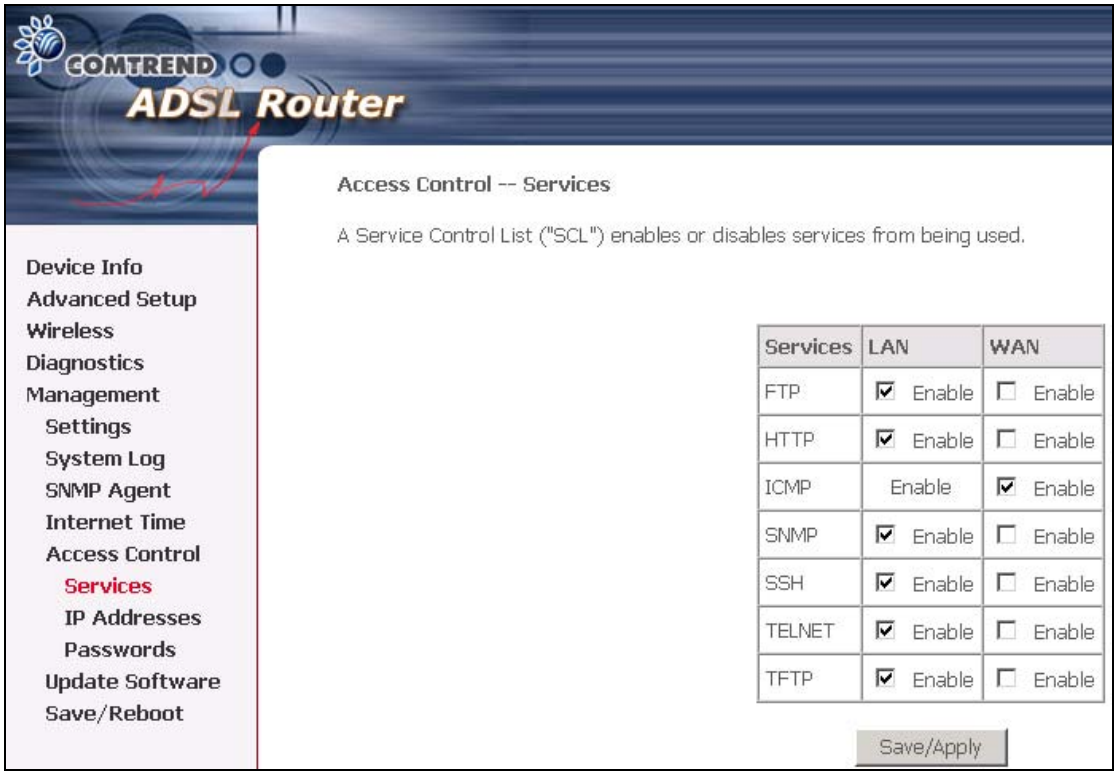

9.5.2 Access IP Addresses

The IP Addresses option limits the access by IP address. If the Access Control Mode is enabled, only the allowed IP addresses can access the router.

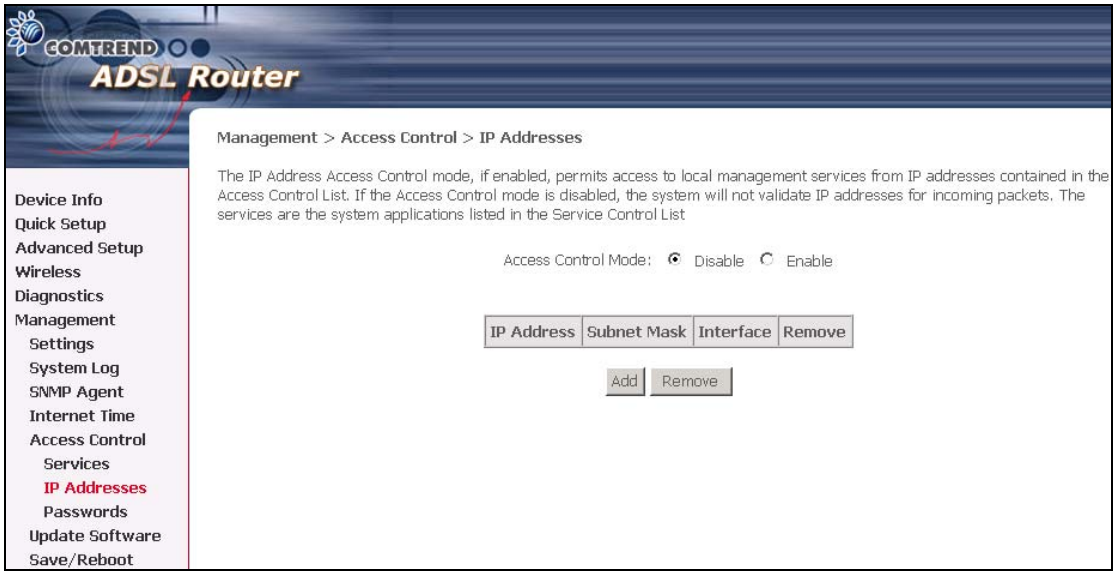

Before you enable it, configure the IP addresses by clicking the **Add** button. Enter the IP address and subnet mask click **Apply** to allow the PC with this IP address managing the DSL Router.

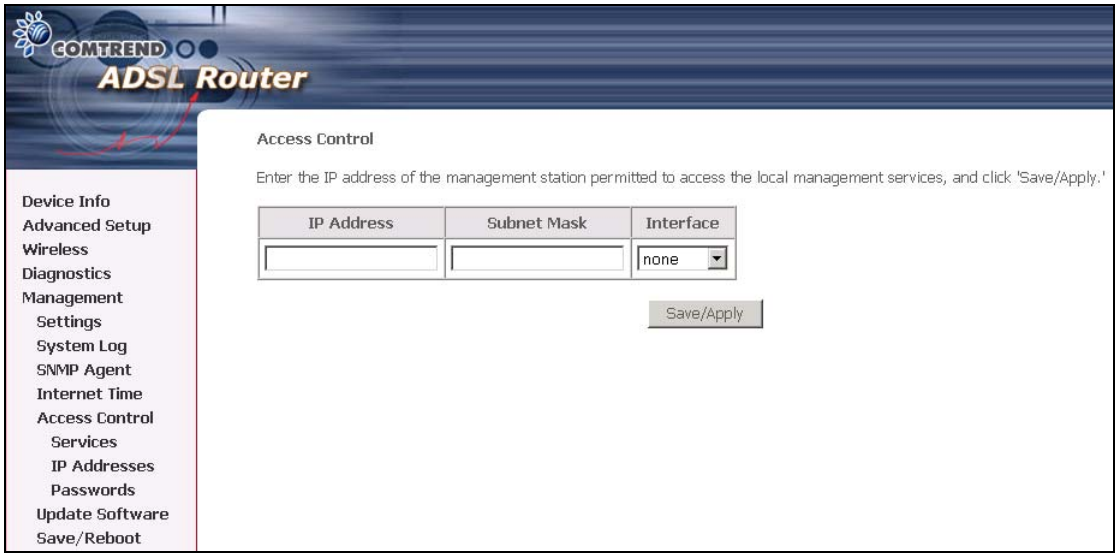

9.5.3 Passwords

The Passwords option configures the access passwords for the router. Access to your DSL router is controlled through three user accounts: root, support, and user.

- "root" has unrestricted access to change and view configuration of your DSL Router.
- "support" is used to allow an ISP technician to access your DSL Router for maintenance and to run diagnostics.
- "user" can access the Router, view configuration settings and statistics, as well as, update the router's software.

Use the fields below to enter up to 16 characters and click Apply to change or create passwords.

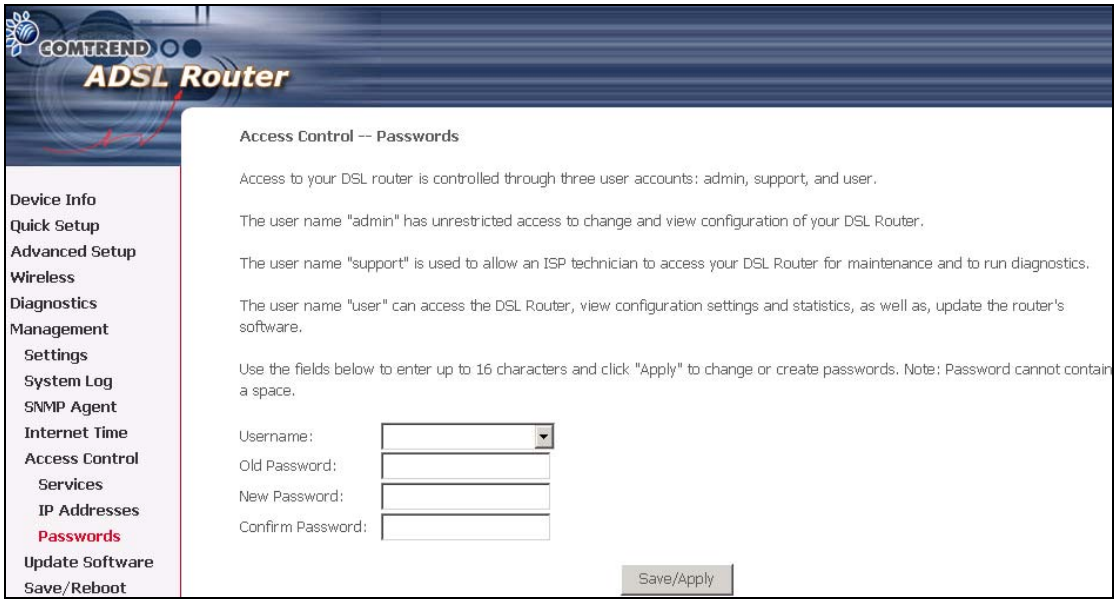
COMTREND
ADSL Router
Device Info
Quick Setup
Advanced Setup
Wireless
Diagnostics
Management
Settings
System Log
SNMP Agent
Internet Time
Access Control
Services
IP Addresses
Passwords
Update Software
Save/Reboot
Access Control -- Passwords
Access to your DSL router is controlled through three user accounts: admin, support, and user.
The user name "admin" has unrestricted access to change and view configuration of your DSL Router.
The user name "support" is used to allow an ISP technician to access your DSL Router for maintenance and to run diagnostics.
The user name "user" can access the DSL Router, view configuration settings and statistics, as well as, update the router's software.
Use the fields below to enter up to 16 characters and click "Apply" to change or create passwords. Note: Password cannot contain a space.
Username:
Old Password:
New Password:
Confirm Password:
Save/Apply

9.6 Update software

The Update Software screen allows you to obtain an updated software image file from your ISP. Manual software upgrades from a locally stored file can be performed using the following screen.

COMTREND
ADSL Router
Device Info
Quick Setup
Advanced Setup
Wireless
Diagnostics
Management
Settings
System Log
SNMP Agent
Internet Time
Access Control
Update Software
Save/Reboot
Tools -- Update Software
Step 1: Obtain an updated software image file from your ISP.
Step 2: Enter the path to the image file location in the box below or click the "Browse" button to locate the image file.
Step 3: Click the "Update Software" button once to upload the new image file.
NOTE: The update process takes about 2 minutes to complete, and your DSL Router will reboot.
Software File Name:
Browse...
Update Software

Step 1: Obtain an updated software image file from your ISP.

Step 2: Enter the path to the image file location in the box below or click the **Browse** button to locate the image file.

Step 3: Click the "Update Software" button once to upload the new image file.

NOTE: The update process takes about 2 minutes to complete, and your DSL Router will reboot.

9.7 Save and Reboot

The Save/Reboot options saving the configurations and reboot the router. Close the DSL Router Configuration window and wait for 2 minutes before reopening your web browser. If necessary, reconfigure your PC's IP address to match your new configuration.

Appendix A: Firewall

Stateful Packet Inspection
Refers to an architecture, where the firewall keeps track of packets on each connection traversing all its interfaces and makes sure they are valid. This is in contrast to static packet filtering which only examines a packet based on the information in the packet header.

Denial of Service attack
Is an incident in which a user or organization is deprived of the services of a resource they would normally expect to have. Various DoS attacks the device can withstand are: ARP Attack, Ping Attack, Ping of Death, Land, SYN Attack, Smurf Attack and Tear Drop.

TCP/IP/Port/Interface filtering rules
These rules help in the filtering of traffic at the Network layer i.e. Layer 3.
When a Routing interface is created "Enable Firewall" must be checked.
Navigate to Advanced Setup -> Security -> IP Filtering, web page.

Outgoing IP Filtering: Helps in setting rules to DROP packets from the LAN interface. By default if Firewall is Enabled all IP traffic from LAN is allowed. By setting up one or more filters, particular packet types coming from the LAN can be dropped.

Filter Name: User defined Filter Name.

Protocol: Can take on any values from: TCP/UDP, TCP, UDP or ICMP

Source IP Address/Source Subnet Mask: Packets with the particular "Source IP Address/Source Subnet Mask" combination will be dropped.
Source Port: This can take on either a single port number or a range of port numbers. Packets having a source port equal to this value or falling within the range of port numbers(portX : portY) will be dropped.

Destination IP Address/Destination Subnet Mask: Packets with the particular "Destination IP Address/Destination Subnet Mask" combination will be dropped.

Destination Port: This can take on either a single port number or a range of port numbers. Packets having a destination port equal to this value or falling within the range of port numbers(portX : portY) will be dropped.

Examples:

1. Filter Name : Out_Filter1
   Protocol : TCP
   Source Address : 192.168.1.45
   Source Subnet Mask : 255.255.255.0
   Source Port : 80
   Dest. Address :NA
   Dest. Sub. Mask : NA
   Dest. Port : NA

This filter will Drop all TCP packets coming from LAN with IP Address/Sub. Mask 192.168.1.45/24 having a source port of 80 irrespective of the destination. All other packets will be Accepted.

2. Filter Name : Out_Filter2
   Protocol : UDP
   Source Address : 192.168.1.45
   Source Subnet Mask : 255.255.255.0
   Source Port : 5060:6060
   Dest. Address :172.16.13.4
   Dest. Sub. Mask : 255.255.255.0
   Dest. Port : 6060:7070

This filter will drop all UDP packets coming from LAN with IP Address/Sub.Mask 192.168.1.45/24 and a source port in the range of 5060 to 6060, destined to 172.16.13.4/24 and a destination port in the range of 6060 to 7070

Incoming IP Filtering:

Helps in setting rules to ACCEPT packets from the WAN interface. By default all incoming IP traffic from WAN is Blocked, if the Firewall is Enabled. By setting up one or more filters, particular packet types coming from the WAN can be Accepted.

Filter Name: User defined Filter Name.

Protocol: Can take on any values from: TCP/UDP, TCP, UDP or ICMP

Source IP Address/Source Subnet Mask: Packets with the particular "Source IP Address/Source Subnet Mask" combination will be accepted.

Source Port: This can take on either a single port number or a range of port numbers. Packets having a source port equal to this value or falling within the range of port numbers(portX : portY) will be accepted.

Destination IP Address/Destination Subnet Mask: Packets with the particular "Destination IP Address/Destination Subnet Mask" combination will be accepted.

Destination Port: This can take on either a single port number or a range of port numbers. Packets having a destination port equal to this value or falling within the range of port numbers(portX : portY) will be accepted.

The WAN interface on which these rules apply needs to be selected by the user.

Examples:

1. Filter Name : In_Filter1
   Protocol : TCP
   Source Address : 210.168.219.45
   Source Subnet Mask : 255.255.0.0
   Source Port : 80
   Dest. Address :NA
   Dest. Sub. Mask : NA
   Dest. Port : NA

Selected WAN interface: mer_0_35/nas_0_35

This filter will ACCEPT all TCP packets coming from WAN interface mer_0_35/nas_0_35 with IP Address/Sub. Mask 210.168.219.45/16 having a source port of 80 irrespective of the destination. All other incoming packets on this interface are DROPPED.

2. Filter Name : In_Filter2
   Protocol : UDP
   Source Address : 210.168.219.45
   Source Subnet Mask : 255.255.0.0
   Source Port : 5060:6060
   Dest. Address :192.168.1.45
   Dest. Sub. Mask : 255.255.255.0
   Dest. Port : 6060:7070

This rule will ACCEPT all UDP packets coming from WAN interface mer_0_35/nas_0_35 with IP Address/Sub.Mask 210.168.219.45/16 and a source port in the range of 5060 to 6060, destined to 192.168.1.45/24 and a destination port in the range of 6060 to 7070. All other incoming packets on this interface are DROPPED.

MAC Layer Filtering:

These rules help in the filtering of traffic at the Layer 2. MAC Filtering is only effective on ATM PVCs configured in Bridge mode. After a Bridge mode PVC is created, navigate to Advanced Setup -> Security -> MAC Filtering web page.

Global Policy:

When set to Forwarded the default filter behavior is to
Forward all MAC layer frames except those explicitly stated in the rules.
Setting it to Blocked changes the default filter behavior to Drop all
MAC layer frames except those explicitly stated in the rules.

To setup a rule:

Protocol Type: Can be either PPPoE, IPv4, IPv6, AppleTalk, IPX, NetBEUI, IGMP.

Destination MAC Address: Of the form, XX:XX:XX:XX:XX:XX. Frames with this particular destination address will be Forwarded/Dropped depending on whether the Global Policy is Blocked/Forwarded.

Source MAC Address: Of the form, XX:XX:XX:XX:XX:XX. Frames with this particular source address will be Forwarded/Dropped depending on whether the Global Policy is Blocked/Forwarded.

Frame Direction:
LAN <=> WAN --> All Frames coming/going to/from LAN or to/from WAN.
WAN => LAN --> All Frames coming from WAN destined to LAN.
LAN => WAN --> All Frames coming from LAN destined to WAN

User needs to select the interface on which this rule is applied.

Examples:

1.
Global Policy: Forwarded
Protocol Type: PPPoE
Dest. MAC Addr: 00:12:34:56:78
Source MAC Addr: NA
Frame Direction: LAN => WAN

WAN Interface Selected: br_0_34/nas_0_34

Addition of this rule drops all PPPoE frames going from LAN-side to WAN-side with a Dest. MAC Addr. of 00:12:34:56:78 irrespective of its Source MAC Addr. on the br_0_34 WAN interface. All other frames on this interface are forwarded.

2.
Global Policy: Blocked
Protocol Type: PPPoE
Dest. MAC Addr: 00:12:34:56:78:90
Source MAC Addr: 00:34:12:78:90:56
Frame Direction: WAN => LAN

WAN Interface Selected: br_0_34/nas_0_34

Addition of this rule forwards all PPPoE frames going from WAN-side to LAN-side with a Dest. MAC Addr. of 00:12:34:56:78 and Source MAC Addr. of 00:34:12:78:90:56 on the br_0_34 WAN interface. All other frames on this interface are dropped.

Daytime Parental Control

This feature restricts access of a selected LAN device to an outside Network through the router, as per chosen days of the week and the chosen times.

User Name: Name of the Filter.

Browser's MAC Address: Displays MAC address of the LAN device on which the browser is running.

Other MAC Address: If restrictions are to be applied to a device other than the one on which the browser is running, the MAC address of that LAN device is entered.

Days of the Week: Days of the week, when the restrictions are applied.

Start Blocking Time: The time when restrictions on the LAN device are put into effect.

End Blocking Time: The time when restrictions on the LAN device are lifted.

Example:

User Name: FilterJohn
Browser's MAC Address: 00:25:46:78:63:21
Days of the Week: Mon, Wed, Fri
Start Blocking Time: 14:00
End Blocking Time: 18:00

When this rule i.e. FilterJohn is entered, a LAN device with MAC Address of 00:25:46:78:63:21 will be restricted access to the outside network on Mondays, Wednesdays and Fridays, from 2pm to 6pm. On all other days and time this device will have access to the outside Network.

Appendix B: Pin Assignments

Line port (RJ11)

Pin	Definition	Pin	Definition
1	-	4	ADSL_TIP
2	-	5	-
3	ADSL_RING	6	-

Pin Assignments of the RJ11 Port

LAN Port (RJ45)

Pin	Definition	Pin	Definition
1	Transmit data+	5	NC
2	Transmit data-	6	Receive data-
3	Receive data+	7	NC
4	NC	8	NC

Pin assignments of the LAN Port

Appendix C: Specifications

Rear Panel

RJ-11 X1 for ADSL, RJ-45 X 4 for LAN, Reset Button X 1, Power Jack X 1, Power switch X 1

ADSL

Standard ANSI T1.413 Issue 2, ITU-T G.992.1, G.992.2 , G.992.3, G.994.1

G.992.5 (ADSL2+)	Downstream : 24 Mbps	Upstream : 1.3 Mbps
G.992.3 (ADSL2)	Downstream : 12 Mbps	Upstream : 1.3 Mbps_
G.DMT data rate	Downstream: Up to 11 Mbps	Upstream: 1 Mbps
G.lite data rate	Downstream: 1.5 Mbps	Upstream: 512 Kbps

Auto-negotiation rate adaptation

Ethernet

Standard	IEEE 802.3, IEEE 802.3u
10/100 BaseT	Auto-sense
MDI/MDX support	Yes

Wireless

Standard	IEEE802.11g, backward compatible with 802.11b
Encryption	64, 128-bit Wired Equivalent Privacy (WEP) Data Encryption
Channels	11 Channels (US, Canada)
	13 Channels (Europe)
	14 Channels (Japan)
Data Rate	Up to 54Mbps
WPA/WPA32	Yes
IEEE 802.1x	Yes
WMM	Yes

ATM Attributes

RFC 2364 (PPPoA), RFC 2684 (RFC 1483) Bridge/Route; RFC 2516 (PPPoE); RFC 1577 (IPoA)

Support PVCs	16
AAL type	AAL5
ATM service class	UBR/CBR/VBR
ATM UNI support	UNI3.1/4.0
OAM F4/F5	Yes

Management

SNMP, Telnet, Web-based management, Configuration backup and restoration

Software upgrade via HTTP, TFTP server, or FTP server

Bridge Functions

Transparent bridging and learning	IEEE 802.1d
VLAN support	Yes
Spanning Tree Algorithm	Yes
IGMP Proxy/Snooping	Yes

Routing Functions

Static route, RIP, and RIPv2, NAT/PAT, DHCP Server/DHCP Relay, DNS Proxy, ARP

Security Functions

Authentication protocols PAP, CHAP,

TCP/IP/Port filtering rules, Port triggering/Forwarding, Packet and MAC address filtering, access control, SSH

Application Passthrough

PPTP, L2TP, IPSec, VoIP, Yahoo messenger, ICQ, RealPlayer, NetMeeting, MSN, X-box, etc

Power Supply

External power adapter 110 Vac or 220 Vac

Environment Condition

Operating temperature 0 ~ 50 degrees Celsius

Relative humidity 5 ~ 90% (non-condensing)

Dimensions

200 mm (W) x 44 mm (H) x 136.5 mm (D)

Certifications

FCC Part 15 class B, FCC Part 68, CE

Note: Specifications are subject to change without notice

Appendix D: SSH Client

Linux OS comes with ssh client. MicroSoft Windows does not have ssh client but there is a public domain one "putty" that you can download.
http://www.chiark.greenend.org.uk/~sgtatham/putty/download.html

To access the router using Linux ssh client:
From LAN: Use the router WEB UI to enable SSH access from LAN.
(default is enabled)
type: ssh -l admin 192.168.1.1

From WAN: In the router, use WEB UI to enable SSH access from WAN.
type: ssh -l support router-WAN-ip-address

To access the router using Windows putty ssh client:
From LAN: Use the router WEB UI to enable SSH access from LAN
(default is enabled)
type: putty -ssh -l admin 192.168.1.1

From WAN: In the router, use WEB UI to enable SSH access from WAN.
type: putty -ssh -l support router-WAN-ip-address